



# PRODUCT LINEUP CATALOG 2022-2023





## We Supply Sound, Not Equipment. That's Our Corporate Philosophy.

Since being founded in 1934, as a manufacturer of commercial and professional audio equipment and security equipment, we have exported our products from Kobe to more than 120 other countries throughout the world.

In every company within the TOA group, which consists of the main company and 29 subsidiaries, we utilize the technical expertise and know-how that we have accumulated throughout the years in every aspect of production, from product planning and development right through to sales and management.

We are constantly improving our technological capabilities in areas such as acoustics, graphics and networks, and developing innovative products in order to provide customers with the ultimate in good sound and peace of mind to help make their lives more comfortable.

TOA has acquired both ISO9001 quality assurance and ISO14001 environmental management certifications.



JMI-0020  
ISO9001  
• Head Office  
• Takarazuka  
Headquarters  
• Tokyo Branch  
• Osaka Branch



JQA-EM1400  
ISO14001  
• Takarazuka  
Headquarters



## S O U N D &

### Basic Management Policy (Three Confidence)

- Total confidence of our customers in the use of all products.
- Total confidence of our associates in all business transactions.
- Total confidence of our employees in all their effort.

### TOA's Environmental Principles

TOA recognizes preservation of the Earth's environment as an important aspect of doing business in the world today. Our staff as a whole remains actively committed to pursuing all corporate activities in ways that give strong consideration to environmental protection.

### Declaration of Social Contribution

TOA voluntarily conducts activities to resolve diverse social issues and contribute to society in general as a "good corporate citizen" trusted by society. We aim to grow together with society and become viewed by society as an "indispensable company," by effectively using company resources and conducting original activities with a strong awareness of our relationship with "sound and video," a business field we specialize in.


# Planning and Design Carried Out in Japan

## Thorough Proving of Product Design and Production Processes

The basis of our quality assurance activities is the product planning and design that is carried out primarily in Japan in response to market needs and in compliance with ISO9001:14001 standards. Our dedicated professional staff inspect products at every stage of the production process using their years of experience and their high levels of technological expertise.

## Quality Control by TOA HQ

TOA production plants both within Japan and overseas are part of TOA Group. Numerous technicians from Japan are sent to our overseas production plants where they use state-of-the-art equipment to produce products under the same stringent quality control system as is used in our production facilities in Japan. Furthermore, twice a year, staff from our Quality Control Division visit overseas production facilities to carry out inspections and ensure that quality standards are being maintained.



# C O M M U N I C A T I O N

## CONTENT

Voice Evacuation Systems.....	04
Rack Mount Equipment.....	30
Network-Related Systems.....	35
IP Intercom Systems.....	37
Amplifiers.....	50
Mixers.....	58
Signal Processing Equipment.....	67
Speakers	
Speakers (Pro-Sound).....	69
Speakers (Commercial).....	82

Conference Systems.....	98
Microphones	
Microphones (Wireless).....	106
Microphones (Wired).....	117
Megaphones.....	122
Selection Charts.....	125
Technical Column.....	131
Certifications & Standards.....	139

# Voice Evacuation Systems

## IP-1000 Series

### »» System Management Software

#### IP-1000S



Model	IP-1000S
<b>CPU</b>	Intel Core i3-4150 or above
<b>Motherboard</b>	Intel 97 series chipset or above, sound card, 1000Mbps network adaptor
<b>RAM</b>	DDR3 4G
<b>Display Card</b>	Dedicated display card with 1G or above. With 2 or above video output. Provide VGA, DVI, etc., general output terminal

<b>Hard Disk</b>	SATA2 7200 rpm or above. 500GB or above
<b>Power Source</b>	Power Source: above 300W
<b>OS</b>	OS: Windows 7 / 8 / 10 Professional

### »» System Management Software

#### IP-1000S1-EA



Model	IP-1000S1-EA
<b>CPU</b>	Intel Core i5 series or above
<b>Motherboard</b>	Intel 97 series chipset or above, sound card, 100/1000 network adaptor
<b>RAM</b>	DDR3 4G or above
<b>Display Card</b>	Dedicated display card with 16G or above. With 2 or above video output. Provide VGA, DVI, etc., general output terminal

<b>Hard Disk</b>	SATA 7200 rpm 500GB or above
<b>OS</b>	Windows 7 or above. Recommend Windows 10. Does not support Windows XP

\* Optional SIP Device License IP-IKSISL001

### »» Network Control Input Unit

#### IP-1000CI



Model	IP-1000CI
<b>Power Source</b>	220 V AC, 50Hz
<b>Functional Unit Terminal</b>	Alarm output terminal, alarm input terminal, power input terminal, data upgrade terminal, network input terminal
<b>Network Protocol</b>	TCP/IP, UDP, ARP, ICMP, IGMP
<b>Network Chip Rate</b>	10/100Mbps self-adaption

<b>Color</b>	Black
<b>Dimension</b>	483(W) x 32(H) x 259(D) mm
<b>Weight</b>	2.9kg
<b>Accessories</b>	4P connecting terminals (4pcs), 5P connecting terminals (8pcs), power line (3*1.0mm2/1.5mm) (1pc)

### »» Compact Audio Interface Unit

#### IP-1000AF



Model	IP-1000AF
<b>Power Source</b>	DC 24V
<b>Current Consumption</b>	Below 85mA
<b>Audio Input</b>	1V rms (Max: 2V rms), unbalanced 10KΩ
<b>Audio Output</b>	1V rms, unbalanced 600Ω
<b>Frequency Response</b>	LINE IN (Sampling Rate: 22k): 20Hz -10kHz LINE OUT (MP3/Sampling Rate: 44k): 40Hz -15kHz
<b>Control Contact Input</b>	Open circuit voltage: 24V DC; short circuit current: ≤5mA
<b>Relay</b>	
<b>Normally Closed Contact (NC)</b>	Withstand voltage ≤30V DC, control current ≤500mA

<b>Common Contact (COM)</b>	Withstand voltage ≤30V DC, control current ≤500mA
<b>Normally Open Contact (NO)</b>	Withstand voltage ≤30V DC, control current ≤500mA
<b>Network I/F</b>	10 BASE-T/100 BASE-TX, auto negotiation
<b>Network Protocol</b>	UDP, ARP, ICMP, IGMP
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	Less than 90% RH (no condensation)
<b>Dimension</b>	91(W) x42(H) x109(D) mm
<b>Accessory</b>	5P terminal blocks x 1, 4P terminal blocks x1, Plastic foot (10mm*3mm) x4



## »» Network Module

## IP-100XI



Model	IP-100XI
Power Source	DC 24V
Current Consumption	Below 85mA
Frequency Response	LINE OUT (MP3/ sampling frequency: 44k): 40Hz -15kHz
Amplifier Audio Signal Output	Range: 1V rms, unbalanced 600Ω
Amplifier Muting Control Output	High impedance, max. sink current: 10mA, withstand voltage : 24V DC
Amplifier Protection Detection Input	low level, activated, open-circuit voltage: 3.3V
Amplifier Fault Detection Input	low level, activated, open-circuit voltage: 3.3V
Network I/F	10 BASE-T/ 100 BASE-TX, auto negotiation
Network Protocol	UDP, ARP, ICMP, IGMP
Operating Temperature	0°C to +40°C
Operating Humidity	Less than 90% RH (no condensation)
Dimension	78 (W) x 35 (H) x 81(D) mm
Weight	0.1kg

## »» Compact Amplifier

## AX-0240

240W



\* 0dB = 1V

Model	AX-0240
Power Source	220 V AC, 50Hz
Amplification System	Class D
Power Consumption	61W (According to EN62368-1 Standard) 296W(rated output)
Audio Input	MIC IN: -60dB* 2.2kΩ, electronically-balanced, removable terminal block (3 pins) LINE IN: -10dB* 2.2kΩ, electronically-balanced, removable terminal block (3 pins)
Audio Output	SPEAKER OUT: 240W (100V/ 42Ω), removable terminal block (4P) LINE OUT: 0dB*, 10kΩ, electronically-balanced, removable terminal block(3P)
Fault Output	Octocopter output, puncture: DC 35V, control current: below 50mA, removable terminal block (3 pins)
Frequency Response	50Hz - 20kHz ±3dB (Line)
Total Harmonic Distortion	1% (LINE:1kHz,1/3 rated output,with audio filter: audio precision AUX-0025 and LPF 20kHz filter)
S/N Ratio	MIC: Above 60dB (by audio filter: audio precision AUX-0025 and A-weighted) LINE: Above 80dB (by audio filter: audio precision AUX-0025 and A-weighted)
Control Indicator	MIC gain control, LINE gain control Power LED (green) x 1, Signal LED (green) x 1, Peak LED (red) x 1, Protect output LED (red) x 1
Cooling	Forced air cooling
Operating Temperature	-10°C to +40°C
Operating Humidity	Below 90% RH (no condensation)
Finish	Surface-treated steel plate, black, paint
Dimensions ( W x H x D)	210 x 54.3 x 290 mm
Weight	2.41kg
Accessories	Removable terminal block(3 pins) x 4 ; removable terminal block(4 pins) x 1 ; M3x4 screws for mounting brackets x 8
Option	Rack mount bracket MB-15B-BK, MB-15B-J, MB-15B, YA-706, IP-100XI

## »» Compact Amplifier

## SA-130



Model	SA-130
Power Supply	DC 24V ( Adapter 2.09A)
Output Power	30W (RMS), 100V (333Ω)
Current Consumption	Rated 1.8A or below (Standby mode: 0.1A or below)
Audio Input	Mic x1 (-60dB, Ø6.3 PHONE JACK, Phantom power ON/OFF switch and volume control) AUX 1-2 (-10dB, Ø3.5 MINI JACK, with volume control) AUX 3 (-10dB, 3 RCA JACK, with volume control)
Audio Output Priority	LINE OUT x1 (-10dB, Ø3.5 MINI JACK, Speaker output 100V)
EXT IN Sensitivity	EXT IN > IP > MIC/AUX MIN. → Start broadcast when input signal is greater than 10V MAX. → Start broadcast when input signal is greater than 30V

Signal to Noise Ratio	Above 76dB
Total Harmonic Distortion	1% or below
Frequency Response	50Hz - 15k Hz ( ±3dB)
IP-100XI Module	RJ45 connector (Power supply is supplied internally by SA-130) (Optional)
LED Indicator	Main Power Supply
On/ Off Switch	Main Power Supply
Operating Temperature	0°C - 40°C
Operating Humidity	10 - 90%
Finish	Black paint, aluminum panel
Dimensions	210(W)*44(H)*152(D)mm
Weight	1.4kg
Accessories	User Manual x1, European Terminal 2P x1, Adapter x1, Power Cord x1, Fittings x2, Screw x4

>>> IP Remote Microphone

IP-100RM



Model	IP-100RM
Power Source	DC24V
Current Consumption	Below 200mA (single IP-100RM), below 500mA (connected with 9 RM-110s)
Audio Input	1V rms (Max: 2V rms), 10kΩ electronically balanced gooseneck microphone
Audio Output	1V rms, unbalance 600Ω or unbalanced, 11.25mW, 32Ω
Frequency Response	
LINE IN	(Sampling rate: 22k), 20Hz -10kHz
LINE OUT	(MP3 / sampling rate: 44k), 40Hz - 20kHz
(Network broadcast)	
SPEAKER OUT	(MP3/ sampling rate: 44k), 20Hz - 20kHz
(Network broadcast)	
Control Input	Optocoupler short circuit input, open voltage DC 5V, max. short circuit current ≤5mA
Built-in Monitor Speaker	Maximum output 1.125W

Volume control	Microphone volume control, monitor speaker volume control
No. of Function Keys	15, extendable up to 105 (with 9 RM-110s connected)
Key Extension	10 keys extension per RM-110, EXTENSION connector
No. of Connectable Units	9 (RM-110)
Maximum Zoning Support	1000
Network I/F	10BASE-T/100BASE-TX Auto Negotiation
Network Protocol	UDP, ARP, ICMP, HTTP, IGMP
Operating Temperature	0°C to +40°C
Operating Humidity	Less than 90% RH (no condensation)
Finish	ABS resin, bluish gray
Dimensions	190(W) x 76.5(H) x 215(D) mm (Without the gooseneck microphone)
Weight	0.8kg

>>> IP Remote Microphone Extension

RM-110



Model	RM-110
Current Consumption	Less than 20mA (IP-100RM DC power input)
Connection	Connection by way of dedicated cable
No. of Function Keys	10
Finish	ABS resin, blueish gray (PANTONE 538 or its equivalent)

Operating Temperature	0 °C to +40°C
Operating Humidity	Less than 90% RH (no condensation)
Dimensions	110(W) x 76.5(H) x 215(D) mm
Weight	0.34kg
Accessory	Connection cable x1, Joint bracket A x2, Joint bracket B x1, Screw for Joint bracket x12

>>> IP Remote Microphone

IP-101RM



Model	IP-101RM
Power Supply	DC 24V / 1A
Power Consumption	≤20W
Graphic Display	7.0 inch touch screen, resolution 800 x 480 pixels
Audio Input	1 Vrms, unbalance, 10kΩ
Audio Output	Unbalance, output power 10mW, 32Ω
Monitor Speaker	8Ω/3W
Frequency Response	20Hz - 16kHz

Signal to Noise Ratio	Above 90dB
Network I/F	10BASE-T/100BASE-TX, auto-negotiation
Network Protocol	ARP, UDP, TCP/IP, ICMP, IGMP, SIP
Operating Temperature	0°C - 40°C
Operating Humidity	Less than 90% RH (no condensation)
Dimensions	254(W)*32.5(H)*134(D)mm
Accessories	Adapter( DC24V/1A ) x1, Terminal (3.5 - 5P) x1, Microphone Pole (IM-320) x1

>>> IP PoE Wall Mount Box Speaker

BS-PE678IP1



Model	BS-PE678IP1
Speaker Unit	6"(16cm) double cone type
Power Source	DC 24V / 1A or PoE (IEEE 802.3at)
Standby Power Consumption	Less than 5W
Rated Output Consumption (DC Supply)	2*7W (Maximum Consumption Current 24V/0.65A under DC Condition)
Rated Output Consumption (PoE Supply)	2*7W (Maximum Consumption Current 16V/1.35A under PoE Condition)
Sensitivity (1m/ 1W)	94dB
Frequency Response	100 - 18,000 Hz

Network I/F	10 BASE-T/100BASE-TX, Auto negotiation
Network Protocol	UDP, ARP, ICMP, HTTP, IGMP
Operation Temperature	-20°C to +50°C
Operation Humidity	Less than 90% RH (no condensation)
Finish	Baffle: HIPS resin, off-white Cabinet: Particle board, off-white Grille: Surface-treated steel plate, off-white
Dimensions	250(W) x 190(H) x 110(D) mm
Weight	1.56kg
Accessory	Speaker mounting screw M4*35 x2, 4P terminal block x1

>>> IP PoE Surface Mount Ceiling Speaker

PC-PE1868IP1



Model	PC-PE1868IP1
Speaker Unit	5" (12cm) cone type
Power Source	DC 24V / 1A or PoE (IEEE 802.3at)
Standby Power Consumption	Less than 5W
Rated Output Consumption (DC Supply)	2*7W (Maximum Consumption Current 24V/0.65A under DC Condition)
Rated Output Consumption (PoE Supply)	2*7W (Maximum Consumption Current 16V/1.35A under PoE Condition)
Sensitivity (1m/ 1W)	90dB
Frequency Response	100 - 18,000 Hz

Network I/F	10 BASE-T/100BASE-TX, Auto negotiation
Network Protocol	UDP, ARP, ICMP, HTTP, IGMP
Operation Temperature	-20°C to +50°C
Operation Humidity	Less than 90% RH (no condensation)
Finish	Baffle: ABS resin, off-white Grille: Steel net, off-white (RAL 9010 or equivalent color), paint
Dimensions	Φ180 x 119.7(D) mm
Weight	0.73kg
Accessory	Mounting brackets x1, 4P terminal block x1

## »» IP PoE Reflex Horn Speaker

## SC-PE630IP1



Model	SC-PE630IP1
Power Source	DC 24V / 1A or PoE (IEEE 802.3at)
Standby Power Consumption	Less than 5W
Rated Output Consumption (DC Supply)	2*7W (Maximum Consumption Current 24V/0.65A under DC Condition)
Rated Output Consumption (PoE Supply)	2*7W (Maximum Consumption Current 16V/1.35A under PoE Condition)
Sensitivity (1m/ 1W)	113dB
Frequency Response	300 - 18,000 Hz
Dust/ Water Protection	IP-65

Network I/F	10 BASE-T/100BASE-TX, Auto negotiation
Network Protocol	UDP, ARP, ICMP, HTTP, IGMP
Operation Temperature	-20°C to +50°C
Finish	Horn: Aluminum, off-white Back cover: ABS/ PC Composite Bracket, screws and nuts: Stainless steel, dark grey
Dimensions	285(W) x 227(H) x 277(D) mm
Weight	1.95kg
Accessory	4P terminal block x1

## »» IP Universal Speaker

## BS-P1030BIP1 / BS-P1030WIP1



Model	BS-P1030BIP1	BS-P1030WIP1
Speaker Unit	4.8"(12cm) dynamic cone-type, dome tweeter	
Power Source	DC 24V / 2.7A	
Static Power Consumption	1.85W	
Impedance	8Ω, 30W	
Sensitivity	90dB (1W, 1m)	
Frequency Response	80Hz - 20kHz	
Input Terminal	European standard 2 pins	
Network Input	1Vrms (Max: 2Vrms), Unbalanced, 10kΩ	
Network I/F	10BASE-T/100BASE-TX, Auto Negotiation	
Network Protocol	UDP, ARP, HTTP, ICMP, IGMP	
Operating Temperature	-20°C to +40°C	
Operating Humidity	Below 90% RH (no condensation)	
Finish	Enclosure: ABS resin	
Color	Black	White
Dimensions	196 (W) x 290 (H) x 150 (D) mm	
Accessory	Bracket x1, Bracket mounting screw x2, 2P connection terminal x2, Network port cover (1 set)	

## »» IP Wall-mounted Box Speaker

## BS-P678IP1



Model	BS-P678IP1
Speaker Unit	6"(16cm) double cone type
Power Source	DC 24V / 1A
Static Power Consumption	1.85 W
Impedance	8Ω, 10W
Sensitivity	94 dB
Frequency Response	150Hz - 20kHz
Input Terminal	European standard 2 pins
Line Input	1V rms (Max: 2V rms), unbalanced 10kΩ
Network I/F	10 BASE-T/100BASE-TX, Auto negotiation

Network Protocol	UDP, ARP, HTTP, ICMP, IGMP
Operating Temperature	20°C~+40°C
Operating Humidity	Below 90% RH (no condensation)
Finish	Cabinet: Wood, off-white Grid: Surface-treated steel plate net, off-white
Dimensions	250 (W) x 190 (H) x 110 (D) mm
Accessory	Retaining screw M4*35 x2, 2P connection terminal x2, Network port cover x1

## »» Wall-mounted Box Speaker

## BS-P678E



Model	BS-P678E
Speaker Unit	6"(16cm) double cone type
Impedance	8Ω, 10W
Sensitivity	94 dB
Frequency Response	150Hz - 20kHz
Operating Temperature	20°C~+40°C

Operating Humidity	Below 90% RH (no condensation)
Finish	Cabinet: Wood, off-white Grid: Surface-treated steel plate net, off-white
Dimensions	250 (W) x 190 (H) x 110 (D) mm
Accessory	Screw M4*35 x2

>>> IP Column Speaker

TZ-P406BIP1 / TZ-P406WIP1



Model	TZ-P406BIP1		TZ-P406WIP1	
Speaker Unit	4”(10cm) doubt cone type x4, waterproof IP-65			
Power Source	DC24 / 2.7A			
StaticPower Consumption	1.85 W			
Impedance	4Ω, 40W			
Sensitivity	92 dB (1W, 1m)			
Frequency Response	150Hz -16kHz			
Input Terminal	European standard 2 Pins			
Line Input	1Vrms (Max:2Vrms), Unbalanced, 10kΩ			
Network I/F	10BASE-T/100BASE-TX, Auto Negotiation			
Network Protocol	UDP, ARP, HTTP, ICMP, IGMP			
Operating Temperature	-20°C to +40°C			
Operating Humidity	Below 90% RH (no condensation)			
Finish				
Enclosure	HIPS, black paint		HIPS, white paint	
Punched Net	Surface-treated steel plate, black anti-rust paint		Surface-treated steel plate, white anti-rust paint	
Speaker Bracket	Aluminum alloy, press casting, black paint		Aluminum alloy, press casting, white paint	
Dust/Water Protection	IP-65			
Color	Black		White	
Dimensions	135 (W) x 498 (H) x 128 (D) mm			
Accessory	Speaker bracket x1, Joint bracket x1, Wall mounting bracket x1, Fixing bolt M5*60 x1, Hexagon bolt M6*12 (with plain washer and spring washer) x2, Hexagon M8*15 x1, 2P terminal block x2, Network port cover x1			

IP-3000 Series

>>> System Manager

IP-3000SM



Model	IP-3000SM			
Power Source	100-240 V AC wide range		Sampling Frequency	48KHz
Max. Input Numbers	1024		Frequency Response	20~20k Hz
Max. Output Numbers	1024		Network Protocol	TCP/IP
Bus Numbers	1024		Connector	RJ-45 x2    RS-232 x1
Priority Control	300 Step		Operating Temperature	-10°C to 50°C
Max. Numbers of Control Input/ Control Output	4096 x 4096		Colour	Black
Event Log	Max. 1,000,000 logs		Dimensions	427(D) x 366(W) x 89.2(H) mm
Emergency Log	Max. 1,000,000 logs			

>>> Amplifier Network Module

IP-300XI



Model	IP-300XI			
Power Source	DC 24V, supplied by the amplifier body		Switch	Reset switch
Current Consumption	70mA or low		Indicator	STATUS indicator
Network Section	Network I/F : 100BASE-T x 1 Network Protocol : TCP, UDP, ARP, RTP, CMP, TTP, IGMP, FTP Connector: RJ45 terminal Sampling Frequency : 48kHz ,16 bit		Volume Control	Front: Audio input volume adjustment knob
			Finish	Panel: stoving varnish-coated steel plate, black (munsell N1.0 similar color)
			Weight	90g
			Accessory	Screws M3x8   x2



## »» Audio Interface Unit

## IP-3010AF



\* 0dB = 1V

Model	IP-3010AF
Power Source	24V DC
Current Consumption	DC: 1A or less, AC Adapter, 2P removable terminal block
Control Input	16 channels, no-voltage contact input, open voltage: 24V DC, short-circuit current, 5mA or less, removable terminal block (10P x2)
Control Output	16 channels, relay output, withstand voltage: 24V DC, maximum current: 500mA, removable terminal block (16P x2)
Network Section	Network I/F: 100BASE-T x1 Network Protocol: TCP, UDP, ARP, RTP, CMP, TTP, IGMP, FTP Sampling Frequency: 48kHz, 16 bit Connector: RJ45
Audio Input	4 channels, electronically-balanced (optional, transformer-isolated), phantom power supply (17V, can be set with the switch), MIC -60dB*/LINE 0dB* (changeable), 2.2kΩ, removable terminal block (3P x4)
Audio Output	4 channel electronically-balanced (optional, transformer-isolated), 0dB*, 10kΩ, removable terminal block (3P x4).
Frequency Response	MIC 100Hz~16kHz ±3dB, LINE 20Hz~20kHz ±3dB
Switch	Front: Reset switch; Back: DIP Switch (MIC/LINE gain switch, phantom power supply switch)
Indicator	Network LNK/ACT: green x1, STATUS: green x1, SIGNAL: green x4, PEAK: red x4, OUTPUT: green x4, Power indicator: green x1
Volume Control	4 channels input volume knob, Rear
Finish	Steel plate, black (munsell N1.0 or equivalent color), 30% gloss, paint
Dimensions	420 (D) x 360 (W) x 44.3 (H) mm
Weight	4.3kg
Accessory	AC Adapter x1, Plastic foot x4, Screw for fitting plastic foot x4, Removable terminal plug (2P) x1, Removable terminal plug (3P) x8, Rack Mounting bracket MB-15B x2, Removable terminal plug (10P) x2, Removable terminal plug (16P) x2, Screw for rack mounting x8
Option	Wall Mounting bracket: MB-2015ST Q

## »» IP Network Remote Microphone

## IP-300RM



\* 0dB = 1V

Model	IP-300RM
Power Source	AC 100-240V 50/60Hz
Power Consumption	250mA or less
Control Input	1bus, Switch Signal
Audio Input	-20dB*, 10kΩ, unbalanced, φ3.5mm Stereo Mini Jack
Audio Output	0dB*, 600Ω, unbalanced, 3.5mm Stereo Mini Jack (Optional transformer balanced output)
Frequency Response	20Hz~20kHz (MIC 100Hz~16kHz)
Network connection	100BASE-T network connection, ethernet RJ45 plug
Microphone	Unidirectional electret condenser microphone

Keys	13 zone selection keys, emergency key x1, talk key x1
Indicator	Power indicator : green x1, failure indicator: orange x1, emergency Indicator : red x1, selection indicator : green/orange x13
Volume Control	Audio input volume control, microphone volume control, monitor speaker volume control
Finish	Panel: ABS resin, black; Case: steel plate, black (munsell N1.0 or equivalent color)
Dimensions	216.5(D) x 190(W) x 113(H) mm (without goose neck microphone)
Weight	1.5kg
Accessory	AC Adapter x1, power cable x1

## »» Compact Audio Interface Unit

## IP-3001AF



\* 0dB = 1V

Model	IP-3001AF
Power Source	DC 24V
Current Consumption	2.2W or less
Control Input	No-voltage control contact input, open voltage: DC24V, short circuit current: 5mA, removable terminal plug (10P)
Control Output	Relay control contact output, contact withstand voltage: DC24V, max. current: 500mA, removable terminal plug (10P)
Network Section	Network I/F : 100BASE-T x1 Network Protocol : TCP, UDP, ARP, RTP, CMP, TTP, IGMP, FTP Sampling Frequency : 48kHz, 16 bit Connectors: RJ45 terminal
Frequency Response	MIC 100Hz~16kHz ±3dB*, LINE 20Hz~20kHz ±3dB*

Audio Input	Electronic balance input, phantom voltage DC 17V, MIC -60dB* / LINE 0dB*, removable terminal plug (10P)
Audio Output	Electronic balance output, 0dB*, removable terminal plug (10P)
Switch	Reset switch in the front DIP switch on one side: MIC/LINE input switch, microphone phantom power supply switch
Indicator	STATUS indicator in the front
Volume Control	Audio input volume adjustment knob in the front
Finish	Panel: stoving varnish-coated steel plate, black (munsell N1.0 or similar color)
Dimension	71(W) x 40(H) x 82(D) mm
Weight	300g
Accessory	Demountable wiring terminal (10P) x1, plastic pad x4

# VX-1000 Series

## Matrix Controller

### VX-1000MC-EA



Model	VX-1000MC-EA
Power Source	Main Power Input: AC220V, 50Hz, European standard terminal ; Standby Power Input: AC220V, 50Hz, European standard terminal
Power Consumption	16.65W
Audio Input	4 channels, European standard terminal, balanced, input impedance 10KΩ, rated input 0dB
Auxiliary Audio Input	4 channels, RCA jack, unbalance, input impedance 10KΩ, rated input 0dB: mixing with the audio input interface
Amplifier interface	4 channels, RJ45 connector
Auxiliary Audio Output	4 channels, RCA jack, unbalanced, max. 0dB
Recording output	1channel, RCA jack, unbalanced, max. 0dB
Noise Detection Input	4 channels, European standard terminal, balanced, rated input 0dB
Control Input	8 channels, RJ45 connector
Control Output	8 channels, RJ45 connector
Volume controller Output	4 channels, European standard terminal
Speaker Loop Output	4 channels, European standard terminal

Internal Audio Storage	1GB
Network I/F	RJ45 connector, 10BASE-T/100BASE-TX, auto negotiation
Network Protocol	SIP, NTP, HTTP, RTP, FTP
Frequency Response	Analog Audio: 20~20,000Hz ±3dB Network Audio: 40~18,000Hz ±3dB Internal files: 40~18,000Hz ±3dB
Distortion	1% or less
S/N Ratio	70dB or more
Loop Detection Function	Open circuit, short circuit, ground
Fault Detection Function	Main power fault, auxiliary power fault, amplifier fault, power supply frame fault
Operating Temperature	-10℃ - +55℃
Operating Humidity	≤90% RH (no condensation)
Finish	Panel: Aluminum panel surface oxidation treatment, black
Dimensions	493(W)×88(H)×396(D)mm
Wight	6.96kg
Option	PM-100VX-EA Paging Microphone

## IP Remote Microphone

### VX-100RM-EA



Model	VX-100RM-EA
Power Source	DC 24V/1A or PoE (IEEE 802.3at)
Power Consumption	Lower than 200mA ( Single unit of VX-100RM-EA) Lower than 500mA (when connecting 9 units of RM-110VX-EA)
Audio Input	Balanced, 1V rms (Max: 2 V rms), input impedance 10kΩ
Audio Output	Unbalanced, 1V rms, input impedance 10kΩ or unbalanced, 11.25mW, input impedance 32kΩ
Monitor Speaker	1W
Frequency Response	20Hz-20kHz
Audio Control	microphone volume control, monitor speaker volume control

Control Input	Optocoupler isolation circuit input, open circuit voltage DC5V, maximum short-circuit current ≤5mA
No. of Function Keys	10, Max.:100 (when connecting 9 units of RM-110VX-EA)
Network I/F	RJ45, 10BASE-T/100BASE-TX auto-negotiation
Network Protocol	TCP/IP, UDP, HTTP, ARP, RTP, ICMP, IGMP,SIP
Operating Temperature	0℃~+40℃
Operating Humidity	≤90%, no condensation
Finish	ABS resin, black
Dimensions	190(W)×76.5(H)×215(D)mm(excluding microphone)
Option	RM-110VX-EA Remote Microphone Extension

## Remote Microphone Extention

### RM-110VX-EA



Model	RM-110VX-EA
Power Consumption	Lower than 20mA ( VX-100RM-EA DC power input)
No. of Function Keys	10
Operating Temperature	0℃~+40℃

Operating Humidity	≤90%, no condensation
Finish	ABS resin, black
Dimensions	110(W)×76.5(H)×215(D)mm

## »» Peering Frame

## VX-1000PF-EA



Model	VX-1000PF-EA
Power Source	AC220V/50Hz
Power Output	Amplifier output 4 channels, auxiliary amplifier output 1 channel
Amplifier interface	Amplifier interface 4 channels, auxiliary amplifier interface 1 channel

## »» Amplifier Module

## VX-1125DA-EA

125W

## VX-1250DA-EA

250W

## VX-1500DA-EA

500W



\* 0dB = 1V

Model	VX-1125DA-EA	VX-1250DA-EA	VX-1500DA-EA
Power Source	AC 220 V / 50 Hz		
Power Consumption	30.3W (standby mode) 120W (rated output mode)	27.7W (standby mode) 255W (rated output mode)	28.2W (standby mode) 505W (rated output mode)
Amplification System	Class D		
Output Power	125W	250W	500W
Frequency Response	20 Hz - 20 kHz $\pm 3$ dB		

## »» Digital Power Amplifier

## DA-X1000S-EA

1000W

## DA-X0130F-EA

130W x 4



\* 0dB = 1V

Model	DA-X1000S-EA	DA-X0130F-EA
Power Supply	AC220V-240V, 50Hz/60Hz	
Amplifier	Class D amplifier	
Power Consumption	30W(standby mode), 1200W(Rated output 100V line, 10 $\Omega$ )	85W(standby mode), 740W(Rated output 100V line, 67 $\Omega$ x 4)
Input	1 channel: PA LINK (Dedicated Interface with VX-1000MC) 1 channel: AUX INPUT=0dB(1V) (Input level control in maximum position), 20k $\Omega$ , electronically-balanced	4 channels: PA LINK (Dedicated Interface with VX-1000MC) 4 channels: AUX INPUT=0dB(1V) (Input level control in maximum position), 20k $\Omega$ , electronically-balanced
Rated Output	1 channel: 1,000W (100V line, 10 $\Omega$ )	4 channels: 130W (100V line, 67 $\Omega$ )
Frequency Response	110~16,000Hz $\pm 3$ dB	100~20,000Hz $\pm 3$ dB
Total Harmonics Distortion	0.4% (1W), 1% (Rated output)	0.4% (1W), 1% (1kHz, Rated output)
Protection Circuit	Overcurrent protection, undervoltage protection, overvoltage protection, overheat protection, short circuit protection	
S/N Ratio	>90dB (A-weighted)	>85dB (A-weighted)
Crosstalk	-	70dB (A-weighted)
Control Input	ACTIVE: Short=AUX INPUT signal source goes Amplifier output/ Open= PA LINK signal source goes Amplifier output	
LED Indicator	POWER (Green) x 1, SIGNAL (Green) x 1, PEAK (Red) x 1, AUX ACTIVE (Orange) x 1, FAULT (Red) x 1	POWER (Green) x 1, SIGNAL (Green) x 4, PEAK (Red) x 4, AUX ACTIVE (Orange) x 4, FAULT (Red) x 4
Cooling Method	Forced air cooling by FAN	
Operating Temperature	0 $^{\circ}$ C~+40 $^{\circ}$ C	
Operating Humidity	$\leq 90\%$ , not condensing	
Finish	Front panel AL Black, Cover SECC Black	
Control	Front: Power switch Rear : Input volume	Front: Power switch Rear: 4 channels input volume
Dimensions	483(W) $\times$ 88(H) $\times$ 392(D)mm	
Weight	6.18kg	6.90kg
Accessory	(CN)AC power cord x1, (EN)AC power cord x1, pluggable terminal block 2P x1, pluggable terminal block 5P x1	

## »» Zone Expansion Panel

## VX-1010ZE-EA



Model	VX-1010ZE-EA
Power Source	Power Source A: 24V/1A power adapter, plug Power Source B: 24V/1A power adapter, European standard terminal
Standby Power Consumption	$\leq 5$ W
Control Input	11 channels, European standard terminal (8P $\times$ 2)
CPU OFF Cascade	2 channels, RJ45 interface
Communication Interface	2 channels, RJ45 interface
Loop Detection Input	1 channel, European standard terminal (2P $\times$ 2)
Loop Detection Output	2 channels, European standard terminal (4P)

Power Input & Output	3 channels, European standard terminal (6P)
Speaker Loop Output	10 channels, European standard terminal (20P)
Switch	8-digit DIP switch, the first four digits are ZE's ID number, the last four are reserved
Indicator	CONTROL INPUT STATUS(Green) x10, SP OUT STATUS (Green, Red, Orange) x10, EMERGENCY(Red) x1, POWER (Green) x2, CPU OFF(Orange) x1, COM(Green) x1
Operating Temperature	0 $^{\circ}$ C - +40 $^{\circ}$ C
Operating Humidity	$\leq 90\%$ , no condensation
Dimensions	493(W) $\times$ 44(H) $\times$ 267.2(D)mm(Without gooseneck microphone)

# VX-3000 Series

## »» Voice Evacuation Frame

### VX-3004F



### VX-3008F



### VX-3016F



\*1 By default  
\*2 0dB = 1V

Model	VX-3004F	VX-3008F	VX-3016F
<b>Power Source</b>	31 V DC (operating range: 20 - 33 V DC), removable terminal block (4 pins)		
<b>Power Consumption</b>	85 W at 31 V DC	85 W at 31 V DC	90 W at 31 V DC
<b>Indicators</b>	POWER (green) x1, RUN (green) x1, EMERGENCY (red) x1, CPU OFF (red) x1, LAN A (green) x1, LAN B (green) x1, RS LINK A (green) x1, RS LINK B (green) x1 FAULT STATUS (yellow) GENERAL x1, CPU x1, UNIT** x1, NETWORK** x1, EMG MIC** x1, FUSE** x1, POWER** x1, ZONE x8 AMPLIFIER PEAK (red) x4, SIGNAL (green) x4, OPERATE (green) x4, POWER (green) x4	POWER (green) x1, RUN (green) x1, EMERGENCY (red) x1, CPU OFF (red) x1, LAN A (green) x1, LAN B (green) x1, RS LINK A (green) x1, RS LINK B (green) x1 FAULT STATUS (yellow) GENERAL x1, CPU x1, UNIT** x1, NETWORK** x1, EMG MIC** x1, FUSE** x1, POWER** x1, ZONE x8 AMPLIFIER PEAK (red) x3, SIGNAL (green) x3, OPERATE (green) x3, POWER (green) x3	POWER (green) x1, RUN (green) x1, EMERGENCY (red) x1, CPU OFF (red) x1, LAN A (green) x1, LAN B (green) x1, RS LINK A (green) x1, RS LINK B (green) x1 FAULT STATUS (yellow) GENERAL x1, CPU x1, UNIT** x1, NETWORK** x1, EMG MIC** x1, FUSE** x1, POWER** x1, ZONE x16 AMPLIFIER PEAK (red) x2, SIGNAL (green) x2, OPERATE (green) x2, POWER (green) x2
<b>Operation</b>	Fault Control Switch x 2 (ACK/RESET), Test Switch x 1 (LAMP TEST) Setting Switch: ID NUMBER, RESET, IMPEDANCE, Setting (internal front panel)		
<b>Lan A, B</b>	Number of Connectors: 2 (LAN A, LAN B) Network I/F: 1 OOBASE-TX Network Protocol: TCP, UDP, ARP, ICMP, RTP, IGMP, FTP, HTTP Spanning tree Protocol: RSTP Audio Transmission System: TOA Packet Audio Audio Encoding Method: PCM Audio Sampling: 48 kHz, 16 bits Connection Device: Other VX-3004F, VX-3008F, VX-3016F, Switching HUB Connector: RJ45 connector, Connection Cable: Category 5 twisted pair cable (CAT5) Number of Stages of Cascade connection: UP to 7, Maximum Cable Distance: 100 m (328.08 ft)		
<b>RS Link A, B</b>	Number of Connectors: 2 (RS LINK A, RS LINK B) Audio input level: 0 dB (*2) Power feed: Max. 1 A per connector Connector: RJ45 connector, Connection Cable: Shielded Category 5 twisted pair cable (CAT5-STP) Maximum Cable Distance: 1200 m (3937.01 ft)		
<b>DS Link</b>	Connection Device: DS LINK of Power supply units Connector: RJ45 connector, Connection Cable: Shielded Category 5 twisted pair cable (CAT5-STP) Maximum Cable Distance: 5 m (16.4 ft)		
<b>Analog Link</b>	Number of Connectors: 1 input, 1 output Connection Device: Other VX-3004F, VX-3008F, VX-3016F Connector: RJ45 connector, Connection Cable: Shielded Category 5 twisted pair cable (CAT5-STP) Maximum Cable Distance: 800 m (2624.67 ft)		
<b>Control Input 1, 2</b>	16 inputs, no-voltage make contact input, open voltage: 24 V DC, short-circuit current: 2 mA Fault Detection System: Short circuit, Open circuit, Method: Voltage detect Connector: RJ45 connector, Connection Cable: Shielded Category 5 twisted pair cable (CAT5-STP)		
<b>Emergency Control IN</b>	Input 2: Isolated voltage input, -24 to +24 V Connector: RJ45 connector, Connection Cable: Category 5 twisted pair cable (CAT5)		
<b>Control Output 1, 2</b>	General outputs : 8 with CONTROL OUTPUT 1 Exclusive outputs : 3 with CONTROL OUTPUT 2, GENERAL FAULT, CPU FAULT, CPU OFF No-voltage make contact, electrical contact output, control current: 10 mA, withstand voltage: 28V DC Connector: RJ45 connector, Connection Cable: Shielded Category 5 twisted pair cable (CAT5-STP)		
<b>ATT/Control Output</b>	8 outputs, no-voltage make contact, relay contact (NC, NO, C), control current: 2 mA to 5 A Connector: Removable terminal block (12 pins) x 2		16 outputs, no-voltage make contact, relay contact (NC, NO, C), control current: 2 mA to 5 A Connector: Removable terminal block (12 pins) x 4
<b>Audio Input 1, 2, 3, 4</b>	4 inputs Sensitivity: LINE: -20 dB*2, MIC: -60 dB*2 LINE/MIC (changeable with setting software) Gain Control: volume adjustable with volume control (internal front panel) -∞ to 0 dB Input Resistance: 47 kΩ, electronically-balanced Frequency Response: 40 Hz - 20 kHz ±1 dB (at DA CONTROL LINK, 0 dB output) Distortion: 1 % or less (at DA CONTROL LINK, 0 dB output, 1 kHz) Signal to Noise Ratio: 60 dB or more (at DA CONTROL LINK, A-weighted) Phantom Power Supply: 24 V DC, can be set with setting software Connector: Removable terminal block (6 pins) x 2		
<b>Speaker Line</b>	4 channels (with A/B LINE speaker output), 1 Earth terminal Maximum Voltage/Current: 100 Vrms, 5 Arms Connector: Removable terminal block (17 pins) x 1 Fault Detection System: Short circuit, Open circuit, Ground fault, Method: Impedance or End of line	8 channels, 1 Earth terminal Maximum Voltage/Current: 100 Vrms, 5 Arms Connector: Removable terminal block (17 pins) x 1 Fault Detection System: Short circuit, Open circuit, Ground fault, Method: Impedance or End of line	16 channels, 2 Earth terminals Maximum Voltage/Current: 100 Vrms, 5 Arms Connector: Removable terminal block (17 pins) x 2 Fault Detection System: Short circuit, Open circuit, Ground fault, Method: Impedance or End of line
<b>Standby Amplifier Input/Output</b>	Input: 1, Output: 1 Maximum Voltage/Current: 100 Vrms, 5 Arms, Connector: Removable terminal block (2 pins) x 2		
<b>Extension Amplifier Input/Output</b>	-	Input: 2, Output: 2 Maximum Voltage/Current: 100 Vrms, 5 Arms Connector: Removable terminal block (2 pins) x 4	Input: 1, Output: 1 Maximum Voltage/Current: 100 Vrms, 5 Arms Connector: Removable terminal block (2 pins) x 2
<b>Power Amplifier</b>	Number of Amplifiers: 4 Connector: DA CONTROL LINK x 4, DA OUTPUT LINK x 4	Number of Amplifiers: 3 Connector: DA CONTROL LINK x 3, DA OUTPUT LINK x 3	Number of Amplifiers: 2 Connector: DA CONTROL LINK x 2, DA OUTPUT LINK x 2
<b>Operating Temperature</b>	-5°C to +45°C		
<b>Operating Humidity</b>	90 %RH or less (no condensation)		
<b>Finish</b>	Panel: Surface-treated steel plate, black, 30% gloss, paint		
<b>Dimensions</b>	483 (W) x 132.6 (H) x 345 (D) mm		
<b>Weight</b>	7.6kg	7.9kg	8.1kg
<b>Accessory</b>	Rack mounting bracket (preinstalled on the unit) x2, CD (PC setting software) x 1, Removable terminal plug (2 pins) x 2, Removable terminal plug (4 pins) x 1, Removable terminal plug (6 pins) x 2, Removable terminal plug (12 pins) x 2, Removable terminal plug (17 pins) x 1, Ferrite clamp x2	Rack mounting bracket (preinstalled on the unit) x2, CD (PC setting software) x 1, Removable terminal plug (2 pins) x 6, Removable terminal plug (4 pins) x 1, Removable terminal plug (6 pins) x 2, Removable terminal plug (12 pins) x 2, Removable terminal plug (17 pins) x 1, Ferrite clamp x2	Rack mounting bracket (preinstalled on the unit) x2, CD (PC setting software) x 1, Removable terminal plug (2 pins) x 4, Removable terminal plug (4 pins) x 1, Removable terminal plug (6 pins) x 2, Removable terminal plug (12 pins) x 4, Removable terminal plug (17 pins) x 2, Ferrite clamp x2




## »» Digital Power Amplifier Module

**VX-015DA**  
**VX-030DA**  
**VX-050DA**

150W

300W

500W



\* 0dB = 1V

Model	VX-015DA	VX-030DA	VX-050DA
Power Source	31V DC (operating 20-33V DC) DC power in: M4 screw terminal, distance between barriers: 11mm (0.43")		
Amplification System	Class D		
Power Consumption	40W at 31V DC (1/8 rated output)	65W at 31V DC (1/8 rated output)	100W at 31V DC (1/8 rated output)
Rated Output Power	150W (at 100V line and min. resistive and max. capacitive load) 105W (at 70V line and min. resistive and max. capacitive load) 75W (at 50V line and min. resistive and max. capacitive load) (at AC Mains of VX-3000DS: 187V - 253V)	300W (at 100V line and min. resistive and max. capacitive load) 210W (at 70V line and min. resistive and max. capacitive load) 150W (at 50V line and min. resistive and max. capacitive load) (at AC Mains of VX-3000DS: 187V - 253V)	500W (at 100V line and min. resistive and max. capacitive load) 350W (at 70V line and min. resistive and max. capacitive load) 250W (at 50V line and min. resistive and max. capacitive load) (at AC Mains of VX-3000DS: 187V - 253V)
Output Voltage	100V (70V, 50V: selectable by internal change)		
Min. Resistive Load	67Ω (at 100V line), 47Ω (at 70V line), 33Ω (at 50V line)	33Ω (at 100V line), 23Ω (at 70V line), 17Ω (at 50V line)	20Ω (at 100V line), 14Ω (at 70V line), 10Ω (at 50V line)
Max. Capacitive Load	0.5μF		
No. of Channels	1		
Input	DA CONTROL LINK: Nylon connector (15pins)		
Output	DA OUTPUT LINK: Nylon Connector (2pins)		
Frequency Response	40Hz - 20kHz, -5dB to +1dB (at 100V line, 30dB* output)		
Distortion	1% or less (at 100V line, rated output, 1kHz)		
Signal to Noise Ratio	100 dB or more (at 100V line, A-weighted)		
Operating Temperature	-5°C to +45°C		
Operating Humidity	90% RH or less (no condensation)		
Finish	Surface-treated steel plate		
Dimensions	82.8(W) x 91(H) x 358.2(D) mm		
Weight	1.3 kg		1.4kg
Accessory	DA CONTROL LINK Cable x 1, DA OUTPUT LINK Cable x 1, DC Fuse (10A) x 1	DA CONTROL LINK Cable x 1, DA OUTPUT LINK Cable x 1, DC Fuse (20A) x 1	DA CONTROL LINK Cable x 1, DA OUTPUT LINK Cable x 1, DC Fuse (30A) x 1

## »» Power Supply Manager

**VX-3000DS**  
**VX-3150DS**



\* 0dB = 1V

Model	VX-3000DS	VX-3150DS
Applicable Model	System VX-3000 / VX-2000/SX-2000; all amplifiers	
Power Source	220 - 230 V AC, 50 / 60 Hz	
Power Consumption	2800 W max in total (at rated output with charging), 350 W max each (EN60065)	Approx. 1450 W max in total (at rated output with charging), 200 W max each (EN 60065)
DC Power Output (AC mode)	Rated output: 2300W (31V, 72.5A, total DC power output), Peak output: 2780W (29V, 96A, total DC power output)	Rated output: 1150W (31V, 25A, total DC power output), Peak output: 1390W (29V, 48A, total DC power output)
DC Power Output	8 x 31V (19 - 33 V) 25A max. each, M4 screw terminal, distance between barriers: 11mm 3 x 31 V (19 - 33 V) 5A max. each, removable terminal block (3 x 2 pins) 1 x 24 V (16 - 25V) 0.3A max., removable terminal block (1 x 2 pins)	
Charging Method	Temperature compensated trickle charging	
Charging Output Voltage	27.3V ±0.3V (at 25°C), Temperature correction coefficient: -40mV/°C	
Battery Connection	One each positive and negative terminal, applicable cable diameter: AWG 6 - AWG 0 (AWG 1/0) (16mm <sup>2</sup> - 50mm <sup>2</sup> ), Line resistance within 4 mΩ / total	
Control Connector DS LINK IN/OUT	RJ45 female connector for connecting the system and cascade connection, Shielded Twisted-pair straight cable (TIA/EIA-568A standard), Type of control signal: Battery check, AC power status, DC power status, charging circuit failure, battery failure and communication	
Panel Indicator	AC power IN 1, IN 2 (Green), Charging (Green), Battery power (Green), Battery connect (Green), Battery condition (Green)	AC power IN 1, Charging (Green), Battery Power (Green), Battery connect (Green), Battery condition (Green)
Operating Temperature	-5°C to +45°C	
Operating Humidity	90 %RH or less (no condensation)	
Finish	Panel: Surface-treated steel plate, black, 30% gloss, paint	
Dimensions (W x H x D)	482 x 132.6 x 400.5 mm (19", 3U)	
Weight	11.8 kg	approx. 8kg
Accessory	Fuse (T8A H) x2, Fuse (T6.3A L) x2, Blade fuse (35 A) x2, Rack mounting screw (with washer) x4, Power cord (2 m) x2, Fastener hook x4, Fastener loop x4, Thermal insulating sheet x1, CAT5-STP cable (3 m) x1, Ferrite clamp x1	-

## »» Management Software

## VX-3000MG



Model	VX-3000MG
<b>CPU</b>	Core 2 Duo or Athlon X2 at 2.4 GHz and above
<b>Memory</b>	2 GB RAM
<b>Hard disk</b>	2GB free hard disk space
<b>Network</b>	Intranet with 10 Mbps

Operating System	Windows 7 and above
<b>Database</b>	SQL Server 2012 Express and above
<b>IIS</b>	IIS 7.5
<b>Browser</b>	Chrome only

## VX-3000 Series Microphones and Optional Accessories

## »» Remote Microphone



## RM-300X



Model	RM-300X
<b>Power Source</b>	24 V DC (operating range: 15 - 40 V DC, supplied from the voice evacuation frame) or DC input power supply connector (when the optional AD-246 power supply unit used). Usable DC power supply plug: 5.5 mm (0.22") outer diameter, 2.1 mm (0.08") inner diameter, 9.5 mm (0.37") long, and non-polarity type.
<b>Current Consumption</b>	240 mA or less
<b>Audio Output</b>	0 dB*, 600Ω, balanced
<b>External Microphone Input</b>	-40 dB*, 2.2 kΩ, unbalanced, ø3.5 mm phone jack (2P) for electret condenser microphone -20 dB*, 4.7 kΩ, unbalanced, ø3.5 mm phone jack (2P) (AUX Input) (phantom power supply: 3V DC)
<b>Distortion</b>	1 % or less
<b>Frequency Response</b>	100 Hz- 20kHz
<b>S/N Ratio</b>	60 dB or more
<b>Microphone</b>	Unidirectional electret condenser microphone with AGC (ON/OFF selectable)
<b>Chime</b>	Built inside (PCM sound source), monitoring possible using built-in speaker
<b>Level Control</b>	Microphone sensitivity control, monitor speaker volume control, chime (adjustable using software)
<b>Monitor Speaker</b>	Built inside

\*0dB = 1V

<b>Connection Cables</b>	Main line: Shielded CPEV cable ( 1 pair of audio wire + 1 pair of data wire + 1 pair of monitor/control wire + 1 pair of power supply wire) or Shielded Category 5 twisted pair cable (CAT5-STP) Branch line: Shielded Category 5 twisted pair cable (CAT5-STP), RJ45 connector
<b>Max. Cable Length</b>	1200 m
<b>No. of Connectable Expansion</b>	max. 7 units
<b>Operation</b>	Function switch, Covered switch, Broadcast switch
<b>Indicators</b>	Power indicator, Failure indicator, Function switch indicator, Covered switch indicator, Broadcast switch indicator
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	35 % to 80 %RH (no condensation)
<b>Finish</b>	ABS resin, black, semi-gloss
<b>Dimensions</b>	190 (W) X 76.5 (H) X 215 (D) mm (excluding microphone)
<b>Weight</b>	880 g
<b>Option</b>	Remote microphone extension: RM-210F Wall mounting bracket: WB-RM200 Electret condenser microphone: WH-4000A, YP-M101, YP-M301 etc.

## »» Remote Microphone Extension

## RM-210F



Model	RM-210F
<b>Power Source</b>	Supplied from the RM-300X (option)
<b>AC Power Consumption</b>	2.4 W (Including power supply loss of the Emergency Power Panel) 0.4 W (Standby, including power supply loss of the Emergency Power Panel)
<b>Current Consumption</b>	80mA or less (Increase in power input at the RM-300X (option))
<b>Operation</b>	Zone selection key x 10
<b>Indicators</b>	Function switch indicator x 10, Zone Selection indicator x 10

<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	35% to 80% RH (no condensation)
<b>Finish</b>	ABS resin, black, semi-gloss
<b>Dimensions</b>	110(W) x 76.5(H) x 215(D) mm
<b>Weight</b>	350g
<b>Accessory</b>	Connection cable (8 pins, 8 cm) x1, Joint bracket A x2, Joint bracket B x1, Screw for joint bracket x12
<b>Applicable Unit</b>	Remote microphone: RM-300X
<b>Option</b>	Wall mounting bracket: WB-RM200

## »» Fireman's Microphone

## RM-200SF



Model	RM-200SF
<b>Power Source</b>	24V DC (operating range: 15 - 40V DC, supplied from the audio input unit)
<b>Current Consumption</b>	240mA or less
<b>Audio Output</b>	0dB*, transformer-balanced
<b>Distortion</b>	1% or less
<b>Frequency Response</b>	200Hz - 15kHz
<b>S/N Ratio</b>	55dB or more
<b>Microphone</b>	Unidirectional dynamic microphone with talk key, AGC (ON/OFF switchable), microphone element failure detectable by using built-in small oscillator
<b>Volume Control</b>	Microphone volume control, Monitor speaker volume control
<b>Connection Cable</b>	Shielded CPEV cable (each one pair of audio wire, data wire, monitor/control wire, and power supply wire) or Shielded Category 5 twisted pair cable (CAT5-STP), M3 screw terminal
<b>Max. Cable Length</b>	800m
<b>Monitor Speaker</b>	Built inside

\*0dB = 1V

<b>No. of Connectable Expansion</b>	Max. 5 units
<b>Operation</b>	Emergency key, Function keys, CPU switch, Reset switch
<b>Indication</b>	Status indicators, Power indicator, Failure indicator, CPU indicator, Selection indicators, Microphone indicator, Broadcast status indicator
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	35% to 80% RH (no condensation)
<b>Finish</b>	ABS resin, blueish gray (PANTONE 538 or its equivalent)
<b>Dimensions</b>	200 (W) x 215 (H) x 95 (D) mm
<b>Weight</b>	1.48kg (with wall mounting bracket unit)
<b>Accessory</b>	EMC clamp x1, wall mounting bracket unit x 1, Wall mounting screw x 2, Box mounting screw x 2
<b>Option</b>	Remote microphone extension: RM-210
<b>Applicable Box</b>	YS-11A

## »» Control Panel

## VX-3000CT



Model	VX-3000CT
<b>Power Source</b>	20 - 33 V DC, removable terminal block (4P)
<b>Current Consumption</b>	0.09 A at 33 V DC input 0.11 A at 24 V DC input
<b>LAN A, B</b>	Number of Connectors: 2 (LAN A, LAN B) Network I/F: 100BASE-TX Network Protocol: TCP, ARP, ICMP, HTTP Connection Device: VX-3004F, VX-3008F, VX-3016F, NX-300, VX-3000CT, VX-3000PM, Switching HUB Connector: RJ45 connector Connection Cable: Category 5 twisted pair cable (CAT5) or greater Maximum Cable Distance: 100 m (328.08 ft)

<b>Indicators</b>	POWER (green) x1, RUN (green) x1, LINK/ACT (green) x2, SIGNAL (green) x8, FAULT (yellow) x1, STATUS (green/yellow) x9, SELECT (green) x9
<b>Volume Control</b>	8 channels
<b>Operation</b>	Function key x9, Reset key x1, IP address setting switch x1
<b>Operating Temperature</b>	0°C to +40°C (32°F to 104°F)
<b>Operating Humidity</b>	90 %RH or less (no condensation)
<b>Finish</b>	Panel: Surface-treated steel plate, black, 30% gloss, paint Volume control section cover: ABS resin, gray smoke
<b>Dimensions</b>	482 (W) × 44 (H) × 315.2 (D) mm (18.98" × 1.73" × 12.41")
<b>Weight</b>	3 kg (6.61 lb)
<b>Accessory</b>	Rack mounting screw x4, Removable terminal plug (4P) x1

## »» Preamp Matrix Panel

## VX-3000PM



Model	VX-3000PM
<b>Power Source</b>	20 - 33 V DC, removable terminal block (2 pins)
<b>Current Consumption</b>	0.33 A at 33 V DC input 0.35 A at 24 V DC input
<b>LAN A, B</b>	Number of Connectors: 2 (LAN A, LAN B) Network I/F: 100BASE-TX Network Protocol: TCP, UDP, ARP, ICMP, RTP, IGMP, HTTP Spanning tree Protocol: RSTP Audio Transmission System: TOA Packet Audio *1 Audio Encoding Method: PCM Audio Sampling Frequency: 48 kHz Audio Quantifying Bit Number: 16 bits Connection Device: VX-3004F, VX-3008F, VX-3016F, NX-300, VX-3000CT, VX-3000PM, Switching HUB Connector: RJ45 connector Connection Cable: Category 5 twisted pair cable (CAT5) or greater Maximum Cable Distance: 100 m (328.08 ft)
<b>Audio Input</b>	8 inputs Input Level: INPUT 1 - 4: -60 dB *2/-40 dB *2/-20 dB (*2)/0 dB *2 selectable, input impedance 600 Ω, transformer-balanced INPUT 5, 6: -20 dB *2, input impedance 10 kΩ, unbalanced INPUT 7, 8: 0 dB *2, input impedance 10 kΩ, unbalanced Frequency Response: -60 dB *2: 200 Hz - 10 kHz, -2 dB ±3 dB -40 dB *2/-20 dB *2/0 dB *2: 100 Hz - 15 kHz, -2 dB ±3 dB Distortion: 1 % or less Signal to Noise Ratio: 60 dB or more Removable terminal block (6 pins × 2, 4 pins × 2) Only Input 1 is used in common with the front-mounted φ6.3 mm phone jack.

<b>Control Input</b>	20 channels, no-voltage make contact input, open voltage: 30 V DC, short-circuit current: 2 - 10 mA Connector: Removable terminal block (10 pins × 2, 12 pins × 2)
<b>Control Output</b>	Channels 1 - 5, relay (a contact), withstand voltage: 30 V DC, control current: 1 A Channels 6 - 10, open collector output (polarized), withstand voltage: 30 V DC, control current 100 mA Connector: Removable terminal block (10 pins) × 2
<b>Indicators</b>	Signal indicator (green) x8, RUN (green) x1, LINK/ACT (green) x2
<b>Volume Control</b>	8 channels
<b>Operation</b>	Input level setting switch x1, IP address setting switch x1
<b>Operating Temperature</b>	0 °C to +40 °C (32 °F to 104 °F)
<b>Operating Humidity</b>	90 %RH or less (no condensation)
<b>Finish</b>	Panel: Pre-coated steel plate, black, 30 % gloss Volume control section cover: Acrylic resin, gray smoke
<b>Dimensions</b>	482 (W) × 44 (H) × 292.4 (D) mm (18.98" × 1.73" × 11.51")
<b>Weight</b>	3.2 kg (7.05 lb)
<b>Accessory</b>	Rack mounting screw x4, Removable terminal plug (6 pins) x2, Removable terminal plug (4 pins) x2, Removable terminal plug (10 pins) x4, Removable terminal plug (12 pins) x2, Removable terminal plug (2 pins) x1

\*1 TOA's unique technology which makes it possible to transmit high-quality audio signals in real time over an IP network.

\*2 0 dB = 1 V

## Line Output Module

### VX-300LO



Model	VX-300LO
Power Source	Supplied from the VX-3000 Frame (DA CONTROL LINK)
Current Consumption <sup>*1</sup>	Max. 2 mA (Current through DC POWER IN)
Input	DA CONTROL LINK: Connector (15 pins)
Audio Output <sup>*1</sup>	1 channel Output signal level: 0 dB (*2) Adjustable range of the volume control: -∞ to 0 dB Output method: 10 kΩ, transformer-balanced Applicable load impedance: 2 kΩ or more Frequency response: 40 Hz - 20 kHz ±1 dB Distortion: 1% or less (0 dB <sup>*2</sup> output, 1 kHz) Signal to Noise Ratio: 60 dB or more Removable terminal block (3 pins)

Operating Temperature	0 °C to +40 °C (32 °F to 104 °F)
Operating Humidity	90 %RH or less (no condensation)
Finish	Surface-treated steel plate
Dimensions	76 (W) × 39 (H) × 33.2 (D) mm (2.99" × 1.54" × 1.31")
Weight	56 g (0.12 lb)
Accessory	DA CONTROL LINK Cable x1, Removable terminal plug (3 pins) x1, Mount base for cable binding x2, Fixing screw x1

<sup>\*1</sup> When installed in the VX-3000 Frame.

<sup>\*2</sup> 0 dB = 1 V

## Remote Microphone Extension


### RM-210



Model	RM-210
Current Consumption	20mA max. (in terms of RM-200M's DC power input) ; 75mA max. (in terms of DC power inputs of RM-200X and RM-200XF) ; 80mA max. (in terms of DC power input of RM-200SA and RM-200SF)
Connection	Connection by way of dedicated cable
No. of Function Keys	10

Finish	ABS resin, blueish gray (PANTONE 538 or its equivalent)
Dimensions	110 (W) × 76.5 (H) × 215 (D) mm
Weight	350g
Accessory	Extension cable x1, linkage bracket A x2, linkage bracket B x1, screw for linkage bracket x12
Applicable Unit	RM-200SA, RM-200SF, RM-200M, RM-200X, RM-200XF, N-8610RM

## VX-3000 Series System Configuration

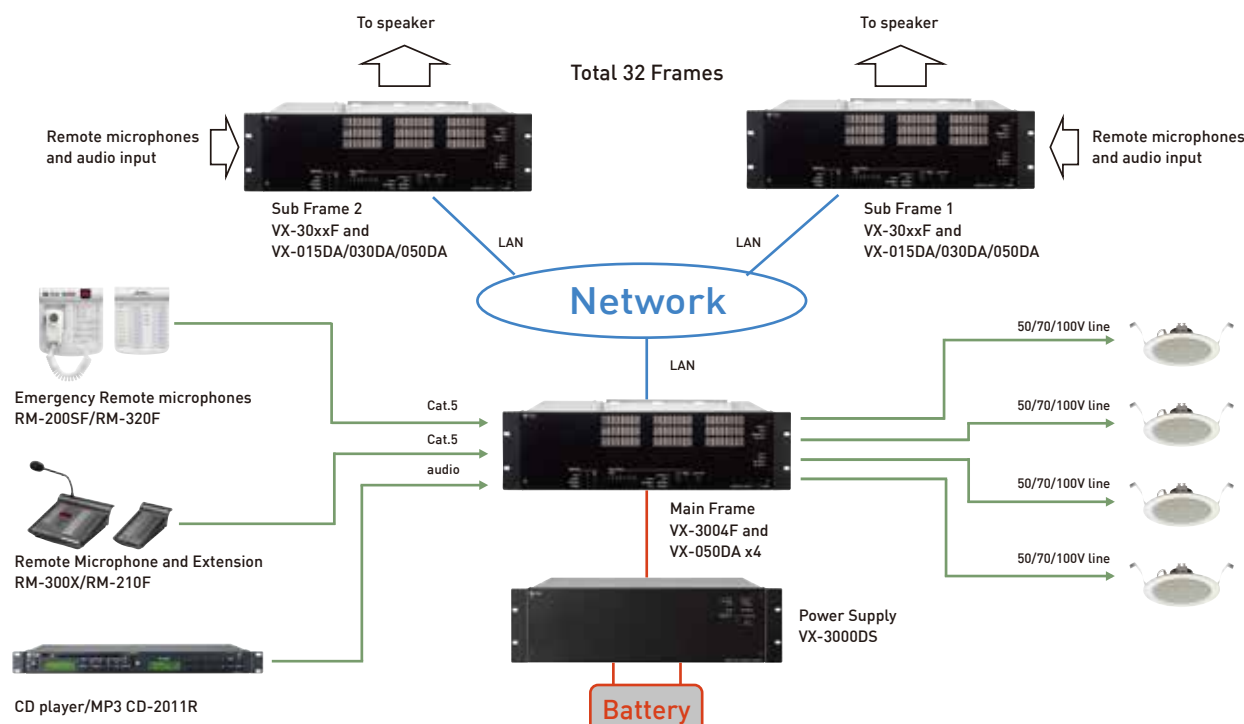



## SX-2000 Series

»» System Manager

### SX-2000SM



<b>Model</b>	SX-2000SM
<b>Power Source</b>	Usable power supply unit: VX-200PS 24V DC (operational range: 20V – 40V DC) Two power inputs construction enables dual- redundant power supply.
<b>Current Consumption</b>	1.1A or less (max. value in the power operating range) 0.8A or less (when operated on 24V DC)
<b>Indication/Operation</b>	SX link access indicator: 2 LAN access indicator: 1 Mode indicator: 3 (EMERGENCY/STANDBY/CPU OFF) Failure indicator: 3 (GENERAL/CPU/SX LINK) Power indicator: 1 (POWER) Run indicator: 1 (RUN) Failure control switch: 3 (AUX/RESET/LAMP TEST)
<b>SX Link</b>	
Network I/F	2 100BASE-TX circuits, RJ45 connector
Matrix System Specification	Bus: 16 Audio input: Max. 64 ch Audio output: Max. 256 zones Contact input: Max. 1416 Contact output: Max. 1416 Priority control: 512 steps Event log: Up to 1000 logs per file (up to 100 files available) Failure log: Up to 100 logs per file (up to 100 files available)
Matrix System Configuration	Connectable SX-2100AI No.: Max. 8 units Connectable SX-2000AO/2100AO No.: Max. 32 units Connectable SX-2000CI No.: Max. 32 units Connectable SX-2000CO No.: Max. 32 units Connectable RM-200SA No.: Max. 64 units (up to 8 RM-200SF/RM-200SA per SX-2100AI)
Connection Cable/Device	Shielded Category 5 twisted pair cable (CAT5-STP) (Connect SX-2100AI and SX-2000AO/SX-2100AO via the switching hub specified by TOA)
No. of Cascaded Switching Hub	Up to 7
Max. Cable Distance	100m (between this unit and a no. of cascaded switching hubs, or between no. of cascaded switching hubs)
<b>LAN</b>	
Network I/F	1 10 BASE-T/100 BASE-TX circuit (selectable by automatic recognition), RJ45 connector for maintenance use
Network Protocol	TCP/IP
Connection Cable	Shielded Category 5 twisted pair cable for LAN (CAT5-STP)
Max. Cable Distance	100m (between this unit and a switching hub or between a switching hub and a PC)

<b>Analog Link</b>	
Input/Output Connector	Output: 2, RJ45 connector
Connection Cable	Shielded Category 5 twisted pair cable (CAT5-STP) (1 pair of audio wire + 1 pair of control wire (CPU OFF) + 1 pair of control wire (system reset/standby) + 1 pair of connection check wire)
Max. Cable Distance	Total length of analog audio link: 800m
<b>DS Link</b>	
Usable Unit	VX-2000DS
Connector/Cable	2 interface, RJ45 Connector, Shielded Category 5 twisted pair cable (CAT5-STP)
Max. Cable Distance	5m
<b>Failure Data Input</b>	3 inputs (ACK/RESET/LAMP TEST), no-voltage make contact input, open voltage: 24V DC, short-circuit current: 2mA, photo coupler input, removable terminal block (12 pins)
<b>Failure Data Output</b>	4 outputs (CPU FAULT/GENERAL FAULT/CPU OFF/BUZZER), Form C contact, no-voltage make contact output, relay contact output (withstand voltage: 40V DC, control current: 2 – 300mA), RJ45 connector
<b>Control Input</b>	8 inputs, no-voltage make contact input, open voltage: 24V DC, short-circuit current: 2mA, photo coupler input, removable terminal block (12 pins)
<b>Surveillance Section for The Control Input Line</b>	Connection resistance to make the function inactive: 20kΩ ±5% Connection resistance to make the function active: 10kΩ ±5% Connector cable: Twisted pair cable (shielded type is recommended), Max. cable distance: 10m
<b>Control Output</b>	8 outputs, Form C contact, no-voltage make contact output, relay contact output (withstand voltage: 40V DC, control current: 2 – 300mA), removable terminal block (12 pins)
<b>24V DC Output</b>	
Output Voltage	24V DC ±10% or less
Max. Feeding Current	100mA
<b>Memory Card</b>	Insertion slot: 1 (use of supplied CF card (128MB)), set data and log data stored
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	35% to 80% RH (no condensation)
<b>Finish</b>	Panel: Aluminum, black, alumite Case: Surface-treated steel plate
<b>Dimensions</b>	482 (W) × 44 (H) × 333 (D)mm
<b>Weight</b>	3.8kg
<b>Accessory</b>	CD (PC setting software) × 1, EV-CF128M (CF card) × 1, Removable terminal plug (4 pins) × 1, Removable terminal plug (12 pins) × 4, Rack mounting screw × 4, Driver × 1

<b>Model</b>	<b>SX-2100AI</b>
<b>Power Source</b>	Usable power supply unit: VX-200PS 24V DC (operational range: 20V ~ 40V DC) Two power inputs construction enables dual- redundant power supply.
<b>Current Consumption</b>	2.0A or less (maximum value in the power operating range)1.5A or less (when operated on 24V DC) Note: But except current consumption of the external equipment of which power is supplied from the unit.
<b>Indication</b>	18 alphanumeric characters, Level indication (8 inputs, monitor), Status indicators, Power indicator, Standby indicator, CPU OFF indicator
<b>Operation</b>	Function button, Input level control, Monitor speaker volume control, ON/OFF switch, Operation button
<b>Audio Input</b>	8 inputs, module construction (max. 4 modules, modules optional) monitoring possible using built-in speaker.
<b>Audio Input Characteristic</b>	Sampling frequency: 48kHz
<b>No. of Connectable Remote Microphones</b>	Max. 8
<b>Power Distribution to Remote Microphones</b>	Up to a total of 8A
<b>SX Link</b>	
Network I/F	2 100BASE-TX circuits, RJ45 connector, decentralized installation possible
Connection Cable/Device	Shielded Category 5 twisted pair cable for LAN (CAT5-STP) To be connected via the switching hub specified by TOA Note: This network must be made completely independent from other LAN.
Max. Cable Distance	100m (between this unit and a switching hub)

<b>Analog Link</b>	
Input/Output Connector	Input: 1 input, RJ45 connector Output: 1 output, RJ45 connector
Connection Cable	Shielded Category 5 twisted pair cable for LAN (CAT5-STP) (1 pair of audio wire + 1 pair of control wire (CPU OFF) + 1 pair of control wire (system reset/standby) + 1 pair of connection check wire)
Max. Cable Distance	Total length of analog audio link: 800m
<b>Control Input</b>	16 inputs, no-voltage make contact input, open voltage: 40V DC or less, short-circuit current: 2mA, photo coupler input, removable terminal block (16 pins)
<b>Control Output</b>	16 outputs, A contact: normally open (changeable to B contact: normally closed), no-voltage make contact output, relay contact output (withstand voltage: 40V DC, control current: 2 — 300mA), removable terminal block (16 pins)
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	35% to 80% RH (no condensation)
<b>Finish</b>	Panel: Aluminum, black, alumite Case: Surface-treated steel plate
<b>Dimensions</b>	482 (W) × 88.4 (H) × 349 (D) mm
<b>Weight</b>	7.2kg
<b>Accessory</b>	Removable terminal plug (4 pins) × 1, Removable terminal plug (16 pins) × 4, Rack mounting screw × 4
<b>Option</b>	Remote microphone interface module: SX-200RM MIC/LINE input module: D-921E, D-921F, D-922E, D-922F Stereo input module: D-936R Note: Modules other than described above cannot be used.

<b>Model</b>	UX-2100AO
<b>Power Source</b>	Usable power supply unit: VX-200PS 24V DC (operational range: 20V – 40V DC) Two power inputs construction enables dual- redundant power supply.
<b>Current Consumption</b>	1.7A or less (when operated on the voltage where the current flows most) 1.2A or less (when operated on 24V DC) Note: But except current consumption of the external equipment of which power is supplied from the unit.
<b>Indication</b>	18 alphanumeric characters, Level indication (8 outputs, monitor), Status indicators, Power indicator, Standby indicator, CPU OFF indicator
<b>Operation</b>	Function button, Output level control, Monitor speaker volume control, ON/OFF switch, Operation button
<b>PA Link</b>	
Audio Output	8 outputs and standby AMP, 0dB*, suitable load: 600Ω or above, electronically-balanced, RJ45 Connector monitoring possible using built-in speaker
Audio Output Characteristic	Frequency response: 20Hz – 20kHz Sampling frequency: 48kHz D/A converter: 24 bit
Connection Cable	Shielded Category 5 twisted pair cable (CAT5-STP)
Max. Cable Distance	5m
Usable Amplifier	VP-2064, VP-2122, VP-2241 or VP-2421, VP-3154, VP-3304, VP-3504 (VP-200VX is required for each amplifier)
<b>Local Audio Input</b>	
Audio Input	2 inputs, 0dB*, 10kΩ, electronically-balanced, RJ45 Connector
Audio Input Characteristic	Frequency response: 20Hz – 20kHz
Connection Cable	Sampling frequency: 48kHz A/D converter: 24 bit
Control Input	2 inputs, no-voltage make contact input, open voltage: 12V DC, short-circuit current: 2mA, photo coupler input
Connection Cable	Shielded Category 5 twisted pair cable (CAT5-STP)
<b>SX Link</b>	
Network I/F	2 100 BASE-TX circuits, RJ45 connector, decentralized installation possible
Connection Cable/Device	Shielded Category 5 twisted pair cable for LAN (CAT5-STP) To be connected via the switching hub specified by TOA Note: This network must be made completely independent from other LAN.
Max. Cable Distance	100m (between this unit and a switching hub)

<b>Analog Link</b>	
Input/Output Connector	Input: 1 input, RJ45 connector Output: 1 output, RJ45 connector
Connection Cable	Shielded Category 5 twisted pair cable for LAN (CAT5-STP) (1 pair of audio wire + 1 pair to "CPU OFF" + 1 pair of control wire (system reset/standby) + 1 pair of connection check wire)
Max. Cable Distance	Total length of analog audio link: 800m
<b>DS Link</b>	
Usable Unit Connector/Cable	VX-2000DS 2 interface, RJ45 Connector, Shielded Category 5 twisted pair cable (CAT5-STP)
Max. Cable Distance	5m
<b>CI/CO Link</b>	
Usable Unit Connector/Cable	SX-2000CI or SX-2000CO 1 interface, RJ45 Connector, Shielded Category 5 twisted pair cable (CAT5-STP)
Max. Cable Distance	800m
<b>Speaker Line Failure Detection Section</b>	
Connector/Cable	Removable terminal block, SP/AMP: 8 pins, STANDBY AMP: 2 pins, AWG 24 – AWG 16
Max. Input	100Vrms, 5Arms
Fault Detection System Method	Short circuit, open circuit, ground fault
End of Line	Impedance or End of line In case of normal: Terminated by 470kΩ between the speaker line and the shield In case of open: Opened between the speaker line and the shield
Impedance	Min. load: 2kΩ (5W) at 100V line
<b>Control Input</b>	8 inputs, no-voltage make contact input, open voltage: 40V DC or less, short-circuit current: 2mA, photo coupler input, removable terminal block (6 pins)
<b>Control Output</b>	8 outputs, C contact, no-voltage make contact output, relay contact output (withstand voltage: 40V DC, control current: 2 – 300mA), removable terminal block (6 pins)
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	35% to 80% RH (no condensation)
<b>Finish</b>	Panel: Aluminum, black, alumite Case: Surface-treated steel plate
<b>Dimensions</b>	482 (W) × 88.4 (H) × 349 (D) mm
<b>Weight</b>	7.1kg
<b>Accessory</b>	Removable terminal plug (8 pins) × 4, Removable terminal plug (6 pins) × 8, Removable terminal plug (4 pins) × 1, Removable terminal plug (2 pins) × 1, Rack mounting screw × 4

\* 0dB = 1V

## »»» Audio Output Unit

## SX-2000AO



\* 0dB = 1V

Model	SX-2000AO
<b>Power Source</b>	Usable power supply unit: VX-200PS 24V DC (operational range: 20V – 40V DC) Two power inputs construction enables dual- redundant power supply.
<b>Current Consumption</b>	1.2A or less (max. value in the power operating range) 0.79A or less (when operated on 24V DC) Note: But except current consumption of the external equipment of which power is supplied from the unit.
<b>Indication</b>	18 alphanumeric characters, Level indication (8 outputs, monitor), Status indicators, Power indicator, Standby indicator, CPU OFF indicator
<b>Operation</b>	Function button, Output level control, Monitor speaker volume control, ON/OFF switch, Operation button
<b>Audio Output</b>	8 outputs, 0dB*, suitable load: 600Ω or above, electronically-balanced output changeable into transformer-balanced output (optional), removable terminal block (12 pins), monitoring possible using built-in speaker
<b>Audio Output Characteristic</b>	Frequency response: 20Hz – 20kHz Sampling frequency: 48kHz D/A converter: 24 bit
<b>Emergency Line Input</b>	Emergency signals switched and sent to Input 1 (H, C, E) by relay removable terminal block (3 pins), Emergency audio message is output from all audio equipment connected input is connected when the power or an emergency-cutoff 24V input is cut off.
<b>Emergency-Cutoff 24V Input</b>	1 input, input current: 5mA or less, removable terminal block (2 pins), cancellation possible using DIP switch
<b>SX Link</b>	
Network I/F	2 100 BASE-TX circuits, RJ45 connector, decentralized installation possible
Connection Cable/Device	Shielded Category 5 twisted pair cable (CAT5-STP) To be connected via the switching hub specified by TOA Note: This network must be made completely independent from other LAN.
Max. Cable Distance	100m (between this unit and a switching hub)

<b>Analog Link</b>	
Input/Output Connector	Input: 1 input, RJ45 connector Output: 1 output, RJ45 connector
Connection Cable	Shielded Category 5 twisted pair cable (CAT5-STP) (1 pair of audio wire + 1 pair of control wire (CPU OFF) + 1 pair of control wire (system reset/standby) + 1 pair of connection check wire)
Max. Cable Distance	Total length of analog link: 800m
<b>CI/CO Link</b>	
Usable Unit	SX-2000CI or SX-2000CO
Connector/Cable	1 interface, RJ45 Connector, Shielded Category 5 twisted pair cable (CAT5-STP)
Max. Cable Distance	800m
<b>Control Input</b>	8 inputs, no-voltage make contact input, open voltage: 40V DC or less, short-circuit current: 2mA, photo coupler input, removable terminal block (6 pins)
<b>Control Output</b>	8 outputs, Form C contact, no-voltage make contact output, relay contact output (withstand voltage: 40V DC, control current: 2 – 300mA), removable terminal block (6 pins)
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	35% to 80% RH (no condensation)
<b>Finish</b>	Panel: Aluminum, black, alumite Case: Surface-treated steel plate
<b>Dimensions</b>	482 (W) × 88.4 (H) × 349 (D) mm
<b>Weight</b>	6.2kg
<b>Accessory</b>	Removable terminal plug (12 pins) × 2, Removable terminal plug (6 pins) × 8, Removable terminal plug (4 pins) × 1, Removable terminal plug (3 pins) × 1, Removable terminal plug (2 pins) × 1, Rack mounting screw × 4
<b>Option</b>	Line transformer: IT-450

## »»» Control Input Unit

## SX-2000CI



\* 0dB = 1V

Model	SX-2000CI
<b>Power Source</b>	Usable power supply unit: VX-200PS 24V DC (operational range: 20V – 40V DC) Two power inputs construction enables dual- redundant power supply.
<b>Current Consumption</b>	0.7A or less (max. value in the power operating range) 0.55A or less (when operated on 24V DC)
<b>Indication</b>	Control input indicator (32), Power indicator, CPU OFF indicator, FAULT indicator
<b>Control Input</b>	32 inputs, no-voltage make contact input, open voltage: 24V DC, short-circuit current: 2mA, photo coupler input, removable terminal block (16 pins)
<b>Surveillance Section for The Control Input Lines</b>	Connection resistance to make the function inactive: 20kΩ ±5% Connection resistance to make the function active: 10KΩ ±5% Connector cable: Twisted pair cable (shielded type is recommended) Max. cable distance: 10m

<b>CI/CO Link</b>	
Input/Output Connector	Input: 1 input, Output : 1 output, RJ45 Connector
Connection Cable	Shielded Category 5 twisted pair cable (CAT5-STP) (1 pair of data wire + 1 pair of control wire)
Max. Cable Distance	800m
<b>24V DC Output</b>	
Output Voltage	24V DC ±10% or less
Max. Feeding Current	100mA
Connector	Removable terminal block (2 pins)
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	35% to 80% RH (no condensation)
<b>Finish</b>	Panel: Aluminum, black, alumite Case: Surface-treated steel plate
<b>Dimensions</b>	482 (W) × 44 (H) × 331.5 (D) mm
<b>Weight</b>	3.6kg
<b>Accessory</b>	Removable terminal plug (16 pins) × 4, Removable terminal plug (4 pins) × 1, Removable terminal plug (2 pins) × 1, Rack mounting screw × 4

## »»» Control Output Unit

## SX-2000CO



\* 0dB = 1V

Model	SX-2000CO
<b>Power Source</b>	Usable power supply unit: VX-200PS 24V DC (operational range: 20V – 40V DC) Two power inputs construction enables dual- redundant power supply.
<b>Current Consumption</b>	0.34A or less (max. value in the power operating range) 0.29A or less (when operated on 24V DC)
<b>Indication</b>	Control output indicator (32), Power indicator, CPU OFF indicator, FAULT indicator
<b>Control Output</b>	32 outputs, no-voltage make contact output, relay contact output, (withstand voltage: 40V DC, control current: 2mA to 300mA), removable terminal block (6 pins)

<b>CI/CO Link</b>	
Input/Output Connector	Input: 1 input, Output: 1 output, RJ45 Connector
Connection Cable	Shielded Category 5 twisted pair cable (CAT5-STP) (1 pair of data wire + 1 pair of control wire)
Max. Cable Distance	800m
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	35% to 80% RH (no condensation)
<b>Finish</b>	Panel: Aluminum, black, alumite Case: Surface-treated steel plate
<b>Dimensions</b>	482 (W) × 44 (H) × 331.5 (D) mm
<b>Weight</b>	3.6kg
<b>Accessory</b>	Removable terminal plug (6 pins) × 16, Removable terminal plug (4 pins) × 1, Rack mounting screw × 4

## SX-2000 Series Modules

### »» IP Interface Module

## SX-200IP



Model	SX-200IP
<b>Network Selection</b>	
Network I/F	10BASE-T/100BASE-TX (Automatic-Negotiation)
Network Protocol	TCP/IP, UDP, HTTP, RTP, ARP, ICMP, IGMP
Connector	RJ45 connector for LAN
Voice sampling frequency	16kHz, 8kHz (controllable on the software) 48kHz sample rate is used for SX-2000 system only
Quantifying bit number	16 bit
Voice encoding method	Sub-band ADPCM, Cryptosystem
Voice packet loss recovery	Silence insertion
Audio delay time	80ms, 320ms (controllable on the software)

Indication	Operation indicator (RUN)
Operating Temperature	0°C to +40°C
Operating Humidity	90% RH or less (no condensation)
Finish	Panel: Pre-coated steel plate, black, 30% gloss
Dimensions	35 (W) x 119.5 (H) x 178.4 (D) mm
Weight	150g

### »» Remote Microphone Interface Module

## SX-200RM



\* 0dB = 1V



Model	SX-200RM
<b>Audio Input</b>	2 inputs, 0dB*, RJ45 Connector
<b>Audio Input Characteristic</b>	Sampling Frequency: 48kHz A/D Converter: 24 bit
<b>Power Feed</b>	Max. 1A per connector
<b>Level Control</b>	Audio input (0dB to +12dB)
<b>Finish</b>	Panel: Pre-coated steel plate, black 30% gloss
<b>Dimensions</b>	35 (W) x 119.5 (H) x 178.4 (D) mm
<b>Weight</b>	190g

### »» Stereo Select Input Module

## D-936R



Model	D-936R
<b>Input</b>	monaural x 2 -10dB*, 10Ω, RCA pin jack
<b>A/D converter</b>	24 bit
<b>Frequency Response</b>	20Hz – 20kHz, ±1dB (+4dB* input)
<b>Sampling Frequency</b>	48kHz
<b>Dynamic range</b>	100dB (IHF-A weighted) or more
<b>THD</b>	0.05% or less
<b>Finish</b>	Panel: Pre-coated steel plate, black, 30% gloss
<b>Dimensions</b>	35 (W) x 119.5 (H) x 178.4 (D) mm
<b>Weight</b>	145g

\* 0dB = 0.775V

### »» Mic/Line Input Module (24 bits Monaural Type)

## D-921F / D-921E



Model	D-921F	D-921E
<b>Input</b>	2 channels, Mic/Line changeable Mic: -50/-36dB*, 4.7kΩ, electronically-balanced, equivalent to XLR-3-31 type Line: -10/+4dB*, 10kΩ, electronically-balanced, equivalent to XLR-3-31 type Phantom power supply (can be used when set for the microphone) 15V: D-901 (option), DP-K1 (option), D-2008SP (option) 12V: SX-2100AI (option) Ground lift switch	2 channels, Mic/Line changeable Mic: -50/-36dB*, 4.7kΩ, electronically-balanced, removable terminal block (3 pins) Line: -10/+4dB*, 10kΩ, electronically-balanced, removable terminal block (3 pins) Phantom power supply (can be used when set for the microphone) 15V: D-901 (option), DP-K1 (option), D-2008SP (option) 12V: SX-2100AI (option) Ground lift switch
<b>A/D Converter</b>	24 bit	
<b>Frequency Response</b>	20Hz – 20kHz, ±1dB (+4dB* input)	
<b>Sampling Frequency</b>	48 kHz	
<b>Dynamic Range</b>	100dB (IHF-A weighted) or more (+4dB* input)	
<b>Total Harmonic Distortion</b>	0.05% or less (+4dB* input)	
<b>Finish</b>	Panel:Pre-coated steel plate, black, 30% gloss	
<b>Dimensions</b>	35 (W) × 119.5 (H) × 178.4 (D) mm	
<b>Weight</b>	150g	140g
<b>Accessory</b>	-	Removable terminal block type connector (preinstalled on the unit) × 2

\* 0dB = 0.775V

### »» Mic/Line Input Module (20 bits Monaural Type)

## D-922F / D-922E



Model	D-922F	D-922E
<b>Input</b>	2 channels, -50/-36/-10/+4dB* (Selectable with the DIP switch), 4.7kΩ, electronically-balanced, equivalent to XLR-3-31 type Phantom power supply (can be set with the DIP switch) 15V: D-901 (option), DP-K1 (option), D-2008SP (option) 12V: SX-2100AI (option) Ground lift switch (can be set with the DIP switch)	2 channels, -50/-36/-10/+4dB* (Selectable with the DIP switch), 4.7kΩ, electronically-balanced, removable terminal block (3 pins) Phantom power supply (can be set with the DIP switch) 15V: D-901 (option), DP-K1 (option), D-2008SP (option) 12V: SX-2100AI (option) Ground lift switch (can be set with the DIP switch)
<b>A/D Converter</b>	20 bit	
<b>Frequency Response</b>	20Hz – 20kHz, ±1dB (+4dB* input)	
<b>Sampling Frequency</b>	48kHz	
<b>Dynamic Range</b>	85dB (IHF-A weighted) or more (+4dB* input)	
<b>Total Harmonic Distortion</b>	0.2% or less (+4dB* input)	
<b>Finish</b>	Panel: Pre-coated steel plate, black, 30% gloss	
<b>Dimensions</b>	35 (W) × 119.5 (H) × 178.4 (D) mm	
<b>Weight</b>	135g	125g
<b>Accessory</b>	-	Removable terminal plug (3 pins, preinstalled on the unit) × 2

\* 0dB = 0.775V



## SX-2000 Series Microphones and Optional Accessories

### »» IP Remote Microphone Station

#### N-8610RM



Model	N-8610RM
<b>Power Source</b>	Power supply device that complies with IEEE802.3af standard or 12V DC (use of the optional AC adapter)
<b>Power Consumption</b>	Use of the AC adapter (12V DC): 4W (microphone only) 8.5W (when connecting 4 RM-210, Extension units) ; Use of the PoE (48 V DC): 5.2W (microphone only), 7.5W (when connecting 4 RM-210, Extension units)
<b>Speech Method</b>	Hands-free conversation (use of goose-neck microphone)
<b>Audio Frequency Response</b>	300Hz – 7kHz
<b>Microphone</b>	Unidirectional electret condenser microphone
<b>Built-in Speaker</b>	6.6 cm cone-type, rated output 0.3W, 8Ω
<b>Network Section</b>	
Network I/F	10BASE-T/100BASE-TX (Automatic-Negotiation)
Network Protocol	TCP/IP, UDP, HTTP, RTP, ARP, ICMP, IGMP
Audio Packet Transmission System	Unicast, Multicast
No. of Paging Destinations	Unicast (max. 16), Multicast (max. 191)
Connector	LAN: RJ-45 connector (PoE compatible)
Voice Sampling Frequency	16kHz, 8kHz (Controllable on the software)
Quantifying Bit Number	16-bit

<b>Voice Encoding Method</b>	Sub-band ADPCM, Cryptosystem
<b>Voice Packet Loss Recovery</b>	Silence insertion
<b>Audio Delay Time</b>	80 ms, 320 ms (controllable on the software)
<b>No. of Connectable Expansion</b>	Max. 4 units (max. 2 units at PoE power supply)
<b>Operation</b>	Function keys (including a covered key), talk key
<b>Indication</b>	Power indicator, Status indicator, Selection indicator, Broadcast status indicator, Microphone indicator
<b>Installation Method</b>	Desk / Surface mounted master station (When mounting to the wall, use the option WB-RM200.)
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	90% RH or less (no condensation)
<b>Finish</b>	ABS resin, blueish gray
<b>Dimensions</b>	190 (W) x 76.5 (H) x 215 (D) mm (excluding microphone)
<b>Weight</b>	700 g
<b>Accessory</b>	CD (for PC setting, maintenance use) x 1 Ferrite clamp (for power supply cable, LAN cable and extension unit cable) x 1 each
<b>Option</b>	Remote microphone extension: RM-210 Wall mounting bracket: WB-RM200 AC adapter: AD-1215P

### »» Fireman's Microphone

#### RM-200SF



Model	RM-200SF
<b>Power Source</b>	24V DC (operating range: 15 – 40V DC, supplied from the SX-2000AI or SX-2100AI audio input unit)
<b>Current Consumption</b>	240mA or less
<b>Audio Output</b>	0dB*, transformer-balanced
<b>Distortion</b>	1% or less
<b>Frequency Response</b>	200Hz – 15kHz
<b>S/N Ratio</b>	55dB or more
<b>Microphone</b>	Unidirectional dynamic microphone with talk key, AGC (ON/OFF switchable), microphone element failure detectable by using a built-in small oscillator
<b>Volume Control</b>	Microphone volume control, Monitor speaker volume control
<b>Connection Cable</b>	Shielded CPEV cable (each one pair of audio wire, data wire, monitor/control wire, and power supply wire) or Shielded Category 5 twisted pair cable (CAT5-STP), M3 screw terminal
<b>Max. Cable Distance</b>	800m
<b>No. of Connectable Expansion</b>	Max. 5 units

	*0dB = 1V
<b>Monitor Speaker</b>	Built inside
<b>Operation</b>	Emergency key, Function keys, CPU switch, Reset switch
<b>Indication</b>	Status indicators, power indicator, failure indicator, CPU indicator, selection indicators, microphone indicator, broadcast status indicator
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	35% to 80% RH (no condensation)
<b>Finish</b>	ABS resin, blueish gray (PANTONE 538 or its equivalent)
<b>Dimensions</b>	200 (W) x 215 (H) x 95 (D) mm
<b>Weight</b>	1.48kg (with wall mounting bracket unit)
<b>Accessory</b>	EMC clamp x1, Wall mounting bracket unit x1, Wall mounting screw x2, Box mounting screw x2
<b>Option</b>	Remote microphone extension: RM-210
<b>Applicable Box</b>	YS-11A

### »» Remote Microphone

#### RM-200SA



Model	RM-200SA
<b>Power Source</b>	24V DC (operating range: 15 – 40V DC, supplied from the SX-2000AI or SX-2100AI audio input unit) or DC input power supply connector (when the optional AD-246 power supply unit used) Usable DC power supply plug: 5.5mm outer diameter, 2.1mm inner diameter 9.5mm long, and non-polarity type.
<b>Current Consumption</b>	240mA or less
<b>Audio Output</b>	0dB*, 600Ω, balanced
<b>External Microphone Input</b>	–40dB*, 2.2kΩ, unbalanced, mini jack for electret condenser microphone (phantom power supply: 3V DC)
<b>Distortion</b>	1% or less
<b>Frequency Response</b>	100Hz – 20kHz
<b>S/N Ratio</b>	60dB or more
<b>Microphone</b>	Unidirectional electret condenser microphone with AGC (ON/OFF selectable)
<b>Chime</b>	Built inside (PCM sound source), monitoring possible using built-in speaker
<b>Level Control</b>	Microphone sensitivity control, monitor speaker volume control, chime (adjustable using the software)
<b>Monitor Speaker</b>	Built inside
<b>Max. Cable Distance</b>	800m

	*0dB = 1V
<b>Connection Cable</b>	Main line: Shielded CPEV cable (1 pair of audio wire + 1 pair of data wire + 1 pair of monitor/control wire + 1 pair of supply wire) or Shielded Category 5 twisted pair cable (CAT5-STP) Branch line: Shielded Category 5 twisted pair cable (CAT5-STP), RJ45 connector
<b>No. of Connectable Expansion</b>	Max. 4 units
<b>Operation</b>	Function switch, Covered switch, Broadcast switch
<b>Indicator</b>	Power indicator, Failure indicator, Function switch indicator, Covered switch indicator, Broadcast switch indicator
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	35% to 80% RH (no condensation)
<b>Finish</b>	ABS resin, blueish gray
<b>Dimensions</b>	190 (W) x 76.5 (H) x 215 (D) mm (excluding microphone)
<b>Weight</b>	880g
<b>Option</b>	Remote microphone extension: RM-210 Wall mounting bracket: WB-RM200 Electret condenser microphone: WH-4000A, YP-M101, YP-M301 etc.

## » Remote Microphone Extension

### RM-210



Model	RM-210
Current Consumption	20mA max. (in terms of RM-200M's DC power input) 75mA max. (in terms of DC power inputs of RM-200X and RM-200XF) 80mA max. (in terms of DC power inputs of RM-200SA and RM-200SF)
Connection	Connection by way of dedicated cable
No. of Function Keys	10
Finish	ABS resin, blueish gray (PANTONE 538 or its equivalent)
Dimensions	110 (W) × 76.5 (H) × 215 (D) mm
Weight	350g
Accessory	Extension cable × 1, Linkage bracket A × 2, Linkage bracket B × 1, Screw for linkage bracket × 12
Applicable Unit (option)	RM-200M, RM-200SA, RM-200SF, RM-200X, RM-200XF, N-8610RM

## » Terminal Unit



### RM-200RJ



Model	RM-200RJ
Applied Voltage	40V or less
Withstand Voltage	1A
Voltage Indicator	Monitor terminals: Terminal No. 7 (+) and terminal No.8 (-), extinguish voltage: 14V or less, lighting voltage: 21V or more, indicator ON/OFF switchable
Connector	RJ45 connector: 1
Terminal	M3 screw terminal (10 pins), distance between barriers: 6.62mm
Operating Temperature	0°C to +40°C
Operating Humidity	35% to 80% RH (no condensation)
Finish	Surface-treated steel plate, black, paint
Dimensions	84 (W) × 116 (H) × 25.7 (D) mm
Weight	250g

## SX-2000 Series System Configuration

### Distributed Control System Example (University)

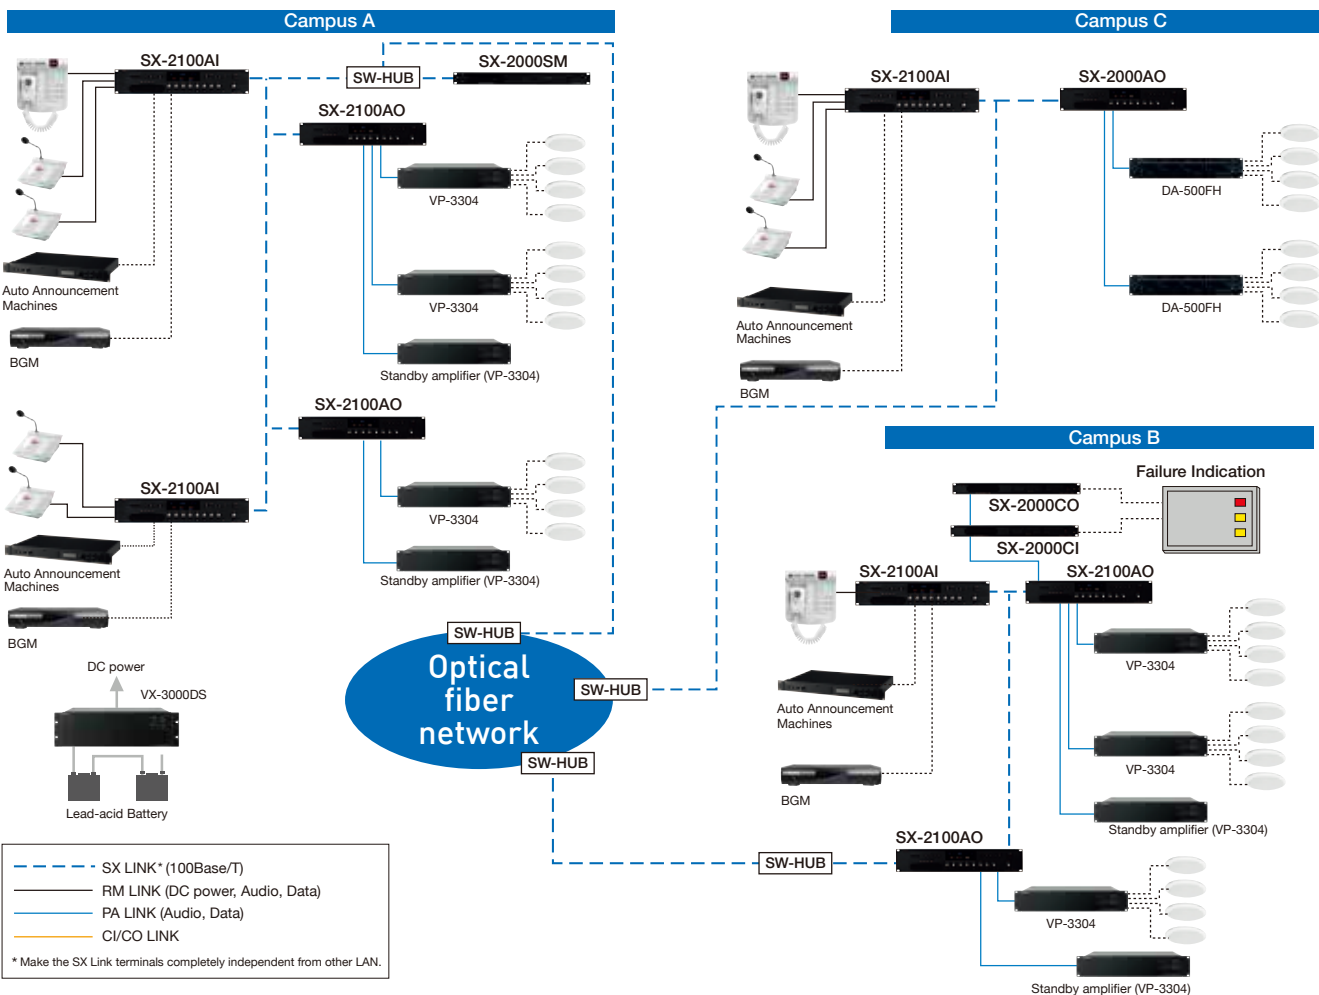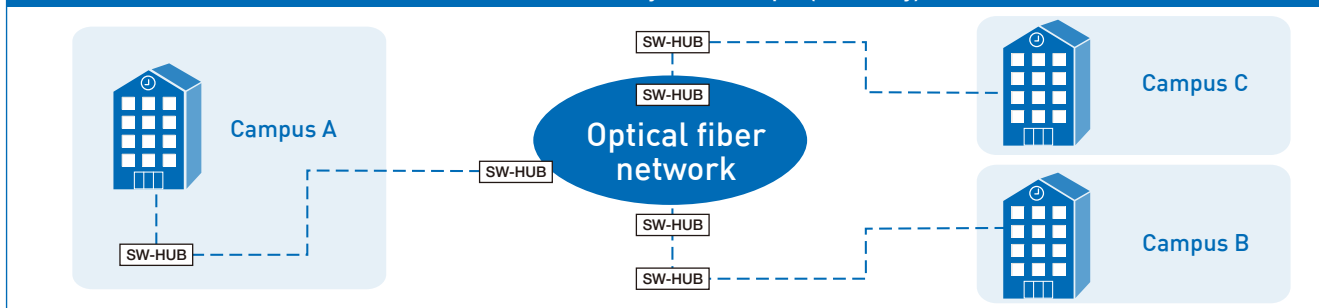

## SX-2000+N-8000 System Example



### Integration of SX-2000 with N-8000 IP Intercom strengthens system capabilities.

A large system with up to 2048 zones is realized on the IP Network.

From a remote location, IP Station\* can make a paging call to any selected zone(s).

\*N-8610RM and N-8600MS.

#### Example: Distributed Factory Application

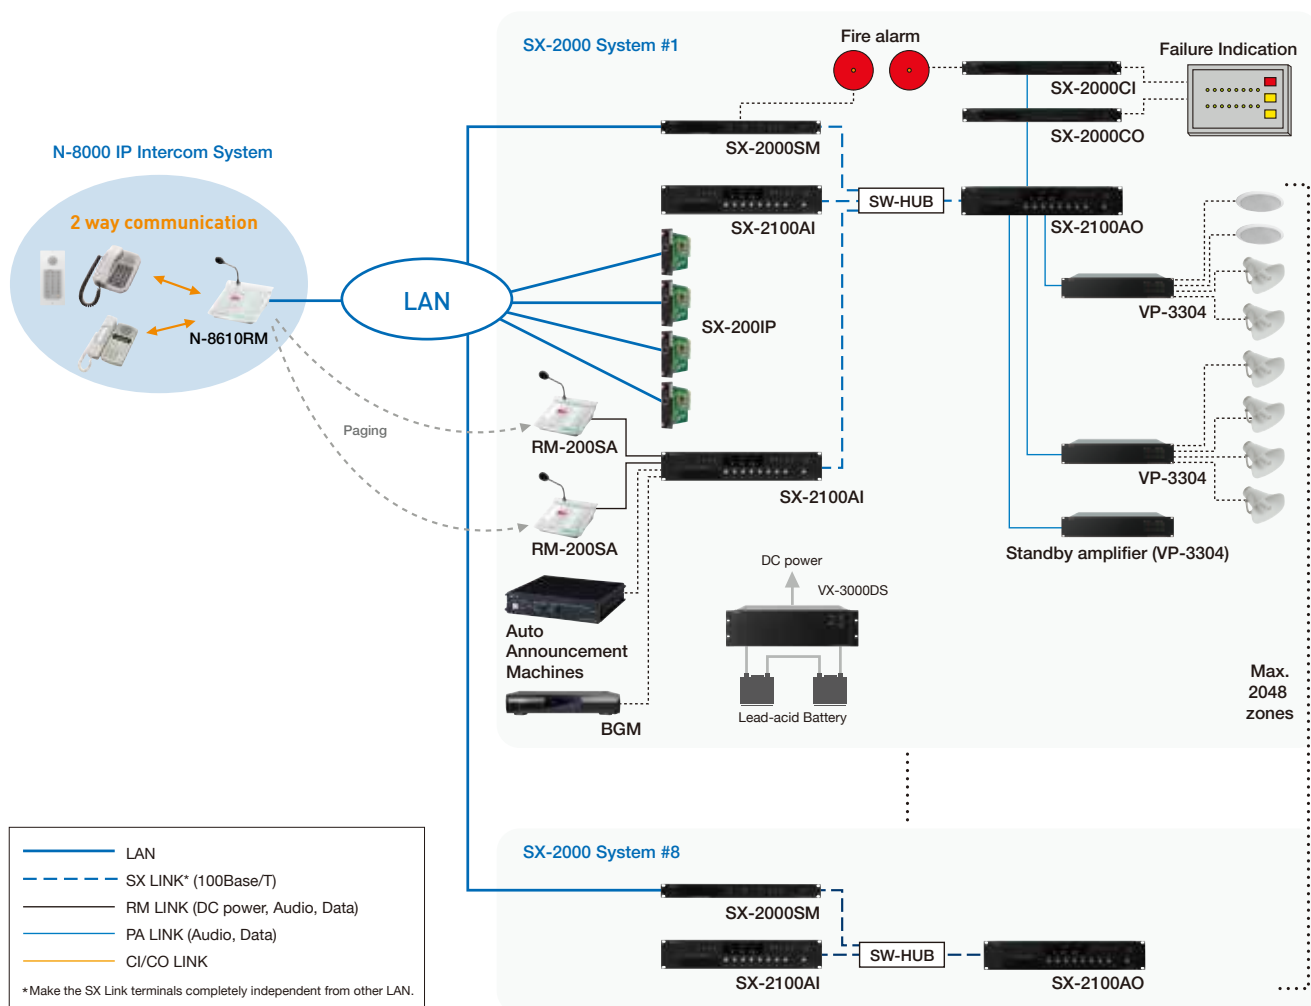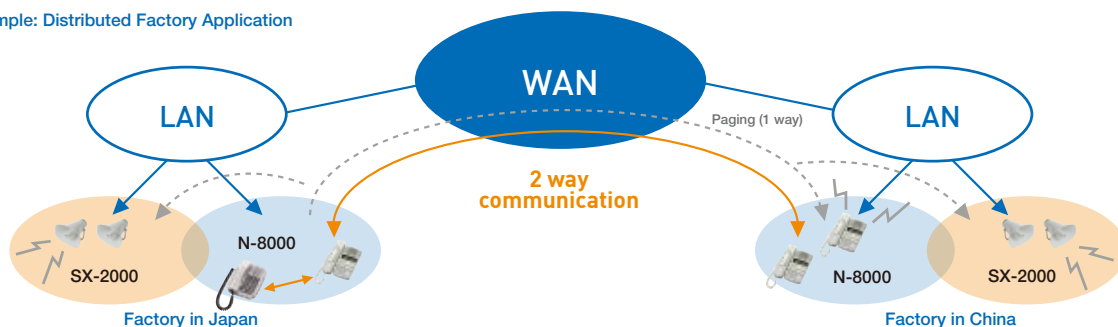

## VM-3000 Series

### »» Voice Alarm System Amplifier

**VM-3240VA**  
**VM-3360VA**

240W

360W



\* 0dB = 1V

Model	VM-3240VA	VM-3360VA
<b>Power Source</b>	230V AC, 50/ 60Hz	
<b>Power Consumption</b>	600W (at rated output) 260W (according to EN60065)	850W (at rated output) 380W (according to EN60065)
<b>Rated Output</b>	240W	360W
<b>Frequency Response</b>	50Hz – 20kHz, $\pm 3$ dB (at 1/3 rated output)	
<b>Distortion</b>	0.7% or less (at rated output, 1kHz)	
<b>Signal-to-Noise Ratio</b>	85dB or more	
<b>Audio Input/Output Characteristic</b>	Sampling frequency: 48kHz A/D D/A CONVERTER: 24 bit	
<b>Input</b>	Inputs 1 – 3: -50dB* (MIC)/ -10dB* (LINE) (changeable), 600 $\Omega$ , electronically balanced, combined XLR connector (female)/ phone jack Input 4: -50dB* (MIC)/ -10dB* (LINE) (changeable) 600 $\Omega$ , electronically balanced removable terminal block (14 x 2 pins) BGM 1 – 2: -10dB*, 10k $\Omega$ , unbalanced, RCA pin jack External AMP input: 100V line, removable terminal block (14 pins)	
<b>Output</b>	Speaker output 1 – 2: max. (240W) per output Speaker output 3 – 6: max. (120W) per output Speaker output 1 – 6: Total within 240W, removable terminal block (14 pins) Allowable minimum load: 500 $\Omega$ (20W) at 100V line for speaker line failure detection Direct output: Direct output from internal or external amplifier, removable terminal block (16 pins) Recording output BGM/Paging: 0dB*, 10k $\Omega$ , unbalanced, RCA pin jack	Speaker output 1 – 2: max. (360W) per output Speaker output 3 – 6: max. (120W) per output Speaker output 1 – 6: Total within 360W, removable terminal block (14 pins) Allowable minimum load: 500 $\Omega$ (20W) at 100V line for speaker line failure detection Direct output: Direct output from internal or external amplifier, removable terminal block (16 pins) Recording output BGM/Paging: 0dB*, 10k $\Omega$ , unbalanced, RCA pin jack
<b>RM Link</b>	Input 1 – 2: Connecting the RM-300MF/ RM-200M Remote Microphone, RJ45 female connector Max. distance: 800m between this unit and remote microphones Link cable: Category 5 Shielded Twisted-Pair straight cable (CAT5-STP)	
<b>Network I/F</b>	10 BASE-T/ 100 BASE-TX (selectable by automatic negotiation), RJ45 female connector Max. distance: 100m between this unit and a switching hub Link cable: Category 5 Shielded Twisted-Pair straight cable (CAT5-STP)	
<b>VM Link</b>	Output: Connecting the VM-3240E or VM-3360E, RJ45 female connector Max. distance: 800m Link cable: Category 5 Shielded Twisted-Pair straight cable (CAT5-STP)	
<b>EXT PA Link</b>	Connecting the VP-2241 (only for VM-3240VA) or VP-2421, RJ45 female connector Max. distance: 5m Link cable: Category 5 Shielded Twisted-Pair straight cable (CAT5-STP)	
<b>General Control</b>	Input 1 – 8: No-Voltage make contact input, open voltage: 24V DC, short-circuit current: 2mA or less, removable terminal block (14 x 2 pins) Output 1 – 8: Isolated open collector output, withstand voltage 30V DC, operating current: 10mA or less, removable terminal block (14 x 2 pins)	
<b>Emergency Control</b>	Input 1 – 5: No-Voltage make contact input, open voltage : 24V DC, short-circuit current: 2mA or less, RJ45 female connector Input 6: Isolated voltage input: Inactive: -24V $\pm 20\%$ , Active: +24V $\pm 20\%$ , RJ45 female connector Status out: Relay contact output, withstand voltage: 40V DC, operating current: 2 – 300mA, RJ45 female connector	
<b>ATT Control</b>	Relay contact 1 – 6, 125V AC or 30V DC, total 5A or less, removable terminal block (16 pins)	
<b>Power In/Out</b>	Power in: Connecting the VX-2000DS only (operating range: 20 - 40V DC) PS out: 28V DC/ 18A M4 Screw terminal distance between barriers 11mm	Power in: Connecting the VX-2000DS only (operating range: 20 - 40V DC) PS out: 28V DC/ 24A M4 Screw terminal distance between barriers 11mm
<b>DC24V Output</b>	24V DC, Max. feeding current 0.3A	
<b>DS Link</b>	Connecting the VX-2000DS, RJ45 female connector Max. distance: 5m Link cable: Category 5 Shielded Twisted-Pair straight cable (CAT5-STP)	
<b>Operating Temperature</b>	-5°C to +45°C	
<b>Operating Humidity</b>	5% to 95% RH (no condensation)	
<b>Finish</b>	Panel Aluminum, hairline, black, Case: Surface-treated steel plate, black	
<b>Dimensions</b>	482 (W) x 132.6 (H) x 431.2 (D) mm	
<b>Weight</b>	16.5kg	19kg
<b>Accessory</b>	Power cord (2m) x 1, Link cable (3m) x 2, Plastic foot x 4, Plastic foot mounting screw x 4, Removable terminal plug (14 pins) x 3, Removable terminal plug (16 pins) x1, Emergency microphone (hand-held) x 1, setting software (CD) x 1	
<b>Option</b>	Input transformer: IT-450	

### »» Pilot Tone Detection Module

**VM-300SV**

Speaker line failure can be detected with high accuracy when a VM-300SV unit specifically designed for 100V speaker line is connected between the speaker line end and the emergency input terminal of the VM-3240VA, VM-3360VA, VM-3240E, and VM-3360E.



### »» Input Transformer

**IT-450**

**Impedance:** 600 $\Omega$   $\pm 10\%$   
**Frequency Response:** 200Hz – 10kHz



## » VM Extension Amplifier

# VM-3240E

# VM-3360E

240W

360W



\* 0dB = 1V

Model	VM-3240E	VM-3360E
Power Source	230V AC, 50/ 60Hz	
Power Consumption	600W (at rated output), 260W (according to EN60065)	
Rated Output	240W	360W
Frequency Response	50Hz – 20kHz, ±3dB (at 1/3 rated output)	
Distortion	0.7% or less (at rated output, 1kHz)	
S/N Ratio	85dB or more	
Input	Local input: -50dB* (MIC)/ -10dB* (LINE) (changeable), 600Ω, electronically balanced, removable terminal block (14 pins) External AMP input: 100V line, removable terminal block (14 x 2 pins)	
Output	Speaker output 1 – 2: max. (240W) per output Speaker output 3 – 6: max. (120W) per output Speaker output 1 – 6: Total within 240W, removable terminal block (14 pins) Allowable min. load: 500Ω (20W) at 100V line for speaker line failure detection Direct output: Direct output from internal or external amplifier, removable terminal block (16 pins)	Speaker output 1 – 2: max. (360W) per output Speaker output 3 – 6: max. (120W) per output Speaker output 1 – 6: Total within 360W, removable terminal block (14 pins) Allowable minimum load: 500Ω (20W) at 100V line for speaker line failure detection Direct output: Direct output from internal or external amplifier, removable terminal block (16 pins)
VM Link	Input: Connecting the VM-3240VA or VM-3260VA, RJ45 female connector Output: Connecting the VM-3240E or VM-3360E, RJ45 female connector Max. distance: 800m Link cable: Category 5 Shielded Twisted-Pair straight cable (CAT5-STP)	
EXT PA Link	Connecting the VP-2241 (for VM-3240E) / VP-2421 (for VM-3360E), RJ45 female connector Maximum distance: 5m Link cable: Category 5 Shielded Twisted-Pair straight cable (CAT5-STP)	
General Control	Input 1 – 8: No-Voltage make contact input, open voltage: 24V DC, short-circuit current: 2mA or less, removable terminal block (14 x 2 pins) Output 1 – 8: Isolated open collector output, withstand voltage: 30V DC, operating current: 10mA or less, removable terminal block (14 x 2 pins)	
Emergency Control	Input 1 – 5: No-Voltage make contact input, open voltage : 24V DC, short-circuit current: 2mA or less, RJ45 female connector Input 6: Isolated voltage input: Inactive: -24V ±20%, Active: +24V ±20%, RJ45 female connector Status out: Relay contact output, withstand voltage: 40V DC, operating current: 2 – 300mA, RJ45 female connector	
ATT Control	Relay contact 1 – 6, 125V AC or 30V DC, total under 5A, removable terminal block (16 pins)	
Power In/Out	Power in: Connecting the VX-2000DS only (operating range: 20 - 40V DC) PS out: 28V DC/18A M4 Screw terminal distance between barriers 11mm	Power in: Connecting the VX-2000DS only (operating range: 20 - 40V DC) PS out: 28V DC/ 24A M4 Screw terminal distance between barriers 11mm
24V DC Output	24V DC, Max. feeding current 0.3A	
DS Link	Connecting the VX-2000DS, RJ45 female connector Max. distance: 5m Link cable: Category 5 Shielded Twisted-Pair straight cable (CAT5-STP)	
Operating Temperature	-5°C to +45°C	
Operating Humidity	5% to 95% RH (no condensation)	
Finish	Panel Aluminum, hairline, black, Case: Surface-treated steel plate, black	
Dimensions	482 (W) × 132.6 (H) × 407 (D) mm	
Weight	16.5kg	19kg
Accessory	Power cord (2m) × 1, Link cable (3m) × 2, Plastic foot × 4, Plastic foot mounting screw × 4, Removable terminal plug (14 pins) × 3, Removable terminal plug (16 pins) × 1	

## VM-3000 Series Microphones and Optional Accessories

### » Fireman's Microphone

# RM-300MF



Model	RM-300MF
Power Source	24V DC (operating range; 15 – 40V DC, supplied from the VM-3000 system)
Current Consumption	120mA (RM-300MF), 660mA (with 3 RM-320F connected)
Frequency Response	200Hz – 15kHz
Distortion	1% or less
S/N Ratio	55dB or more
Microphone	Unidirectional dynamic microphone with talk key, compressor (on/off switchable)
Volume Control	Microphone volume control, Buzzer volume control
Connection Cable	Main line: shielded CPEV cable (each one pair of Audio line, Data line, Power supply line) or Category 5 Shielded Twisted-Pair straight cable for LAN (CAT5-STP), M3 screw terminal
Max. Cable Distance	Total 800m
No. of Connectable RM-320F	Max. 3 units

Operation	Emergency key, Evacuate key, Alert key, Emergency reset key CPU switch, Reset switch
Indicator	Power indicator, Emergency indicator, Communication failure indicator, CPU OFF indicator, Evacuation announcement indicator, Alert announcement indicator, Emergency reset indicator, Microphone in-use indicator, emergency broadcast equipment in-use indicator
Operating Temperature	-5°C to 45°C
Operating Humidity	5% to 95% RH (no condensation)
Finish	ABS resin, blueish gray (PANTONE 538 or its equivalent)
Dimensions	200 (W) × 215 (H) × 82.5 (D) mm
Weight	1.1kg (with wall mounting bracket unit)
Accessory	Wall mounting bracket × 1, Wall mounting screw × 2, Electrical box mounting screw × 2



## » Remote Microphone

## RM-200M



Model	RM-200M
Power Requirement	24V DC (Operating range: 14 – 28V DC) Power input jack: Non-polarity type Usable power input plug (use AC adapter AD-246 or equivalent): outer diameter ø5.5 mm, inner diameter ø2.1 mm, length 9.5 mm
Current Consumption	100mA or less
Distortion	1% or less
Frequency Response	100Hz – 20kHz
S/N Ratio	60dB or more
Audio Output	0dB*1, 600Ω, balanced
Microphone	Unidirectional electret condenser microphone
No. of Function Keys	13, Emergency key (covered), Talk key

\*1 0dB = 1V

\*2 Connecting VM-2000 only

Emergency Broadcast*2	Activation of Emergency Broadcast (pre-recorded announcement or live microphone announcement) by emergency broadcast switch
Volume Control	Microphone volume control
Connection Cable and Connector	Category 5 STP cable, RJ45 connector
Finish	ABS resin, bluish gray (PANTONE 538 or its equivalent)
Dimensions	190 (W) × 76.5 (H) × 215 (D) mm (Gooseneck microphone excluded)
Weight	750g
Accessory	Link cable (3m) × 1
Option	Wall-Mounting Bracket: WB-RM200

## » Fireman's Microphone Extension

## RM-320F



Model	RM-320F
Current Consumption	180mA max. (in terms of RM-300MF)
Connection	Connection to RM-300MF by dedicated cable
No. of Function Keys	20
Finish	ABS resin, blueish gray (PANTONE 538 or its equivalent)

Dimensions	175 (W) × 215 (H) × 70 (D) mm
Weight	700g
Accessory	Wall mounting bracket × 1, Wall mounting screw × 2

## » Remote Microphone Extension


## RM-210



Model	RM-210
Current Consumption	20mA max. (in terms of RM-200M's DC power input) 75mA max. (in terms of DC power inputs of RM-200X and RM-200XF) 80mA max. (in terms of DC power input of RM-200SA and RM-200SF)
Connection	Connection by way of dedicated cable
No. of Function Keys	10

Finish	ABS resin, blueish gray (PANTONE 538 or its equivalent)
Dimensions	110 (W) × 76.5 (H) × 215 (D) mm
Weight	350g
Accessory	Extension cable ×1, linkage bracket A ×2, linkage bracket B ×1, screw for linkage bracket ×12
Applicable Unit	RM-200SA, RM-200SF, RM-200M, RM-200X, RM-200XF, N-8610RM

## VM-3000 Series Application Example

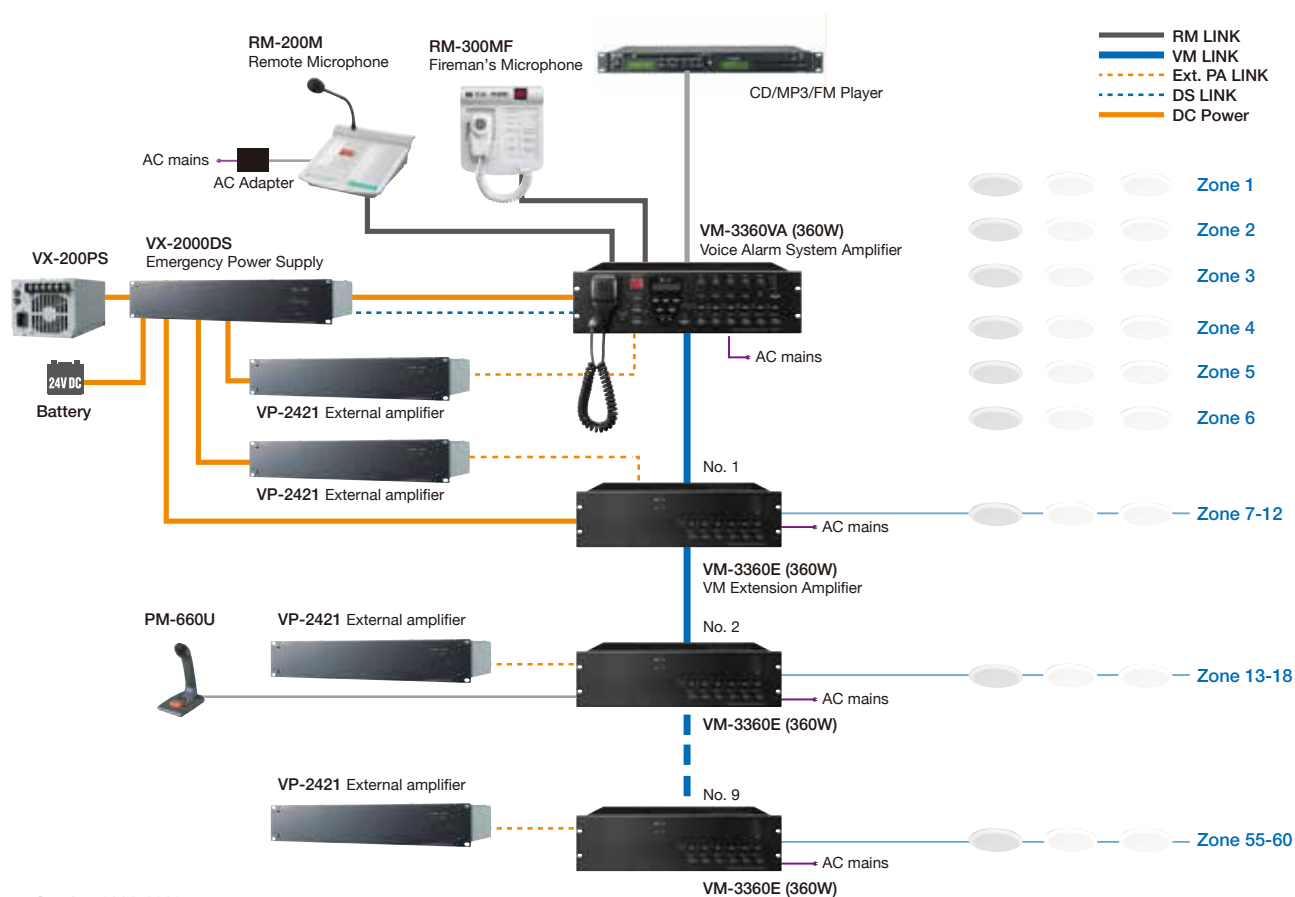

## VM-2000 Series

### >>> System Management Amplifier

**VM-2120**  
**VM-2240**

120W

240W



Model	VM-2120	VM-2240
<b>Power Source</b>	230V AC, 50/ 60Hz 24V DC / 7.5A, M3.5 screw terminal, Barrier distance: 8mm, Applicable cable diameter: AWG22 – AWG14	230V AC (CE-AU / ER / H version) or 120V AC (L version), 50/ 60Hz 24V DC / 15A, M3.5 screw terminal, Barrier distance: 8 mm, Applicable cable diameter: AWG22 – AWG14
<b>Power Consumption on AC Mains</b>	With no signal present: 37W Under normal operating conditions according to EN60065: 1998 sec. 4.2: 107W With rated output signal: 201W	With no signal present: 54W Under normal operating conditions according to EN60065: 1998 sec. 4.2: 255W With rated output signal: 549W
<b>Current Consumption on 24V DC Power Input</b>	With no signal present: 0.7A Under normal operating conditions according to EN60065: 1998 sec. 4.2: 2.1A With rated output signal: 5.2A	With no signal present: 1A Under normal operating conditions according to EN60065: 1998 sec. 4.2: 5A With rated output signal: 14A
<b>Rated Output</b>	120W	240W
<b>Output Voltage/ Impedance</b>	100V/ 83Ω, 70 V/ 42Ω, 50 V/ 21Ω (selectable by the internal wiring change)	100V/ 42Ω, 70V/ 21Ω, 50V/ 10Ω (selectable by the internal wiring change)
<b>Frequency Response</b>	50Hz – 16kHz	
<b>Distortion</b>	1% or less	
<b>Signal-to-Noise Ratio</b>	60dB or more	
<b>Tone Control</b>	Bass: 100Hz ±10dB, Treble: 10kHz ±10dB (Inputs 1 – 3 and BGM individually adjustable.)	
<b>Remote Microphone/ Expansion Amplifier Connection</b>	2 RJ45 female connectors for connecting the RM-200M Remote Microphone and the VM-2120 or VM-2240 unit used as an expansion amplifier Max. distance: 800m Link cable: Category 5 shielded No. of connectable RM-200M's: Up to 4 Twisted-Pair straight cable (TIA/ EIA-568A standard)	
<b>Input</b>	Inputs 1 – 3: -60dB*1 (MIC)/ -10dB*1 (LINE) (changeable), 600Ω, electronically balanced*2, combined XLR connector (female)/phone jack (Only Input 1 is additionally equipped with DIN connector*3.) Telephone paging input: Push-in terminal block*4, Voice sound: -10dB*1, 10kΩ, electronically-balanced input with shield terminal*2 Control: No-voltage make contact input, open voltage: 3.3V DC, short-circuit current: under 1mA BGM 1 – 2: -20dB*1, 10 kΩ, RCA pin jack, monaural (internally mixed) Power amplifier input: 0dB*1, 10kΩ, RCA pin jack External speaker line input: 100V line, for All-Zone Broadcast (This input is selected when the "Unit's broadcast cutoff" control is activated.)	
<b>Output</b>	Speaker output: Plug-in screw connector*5 5-zone selector with attenuator (all zones simultaneously selectable) Direct speaker line output: Direct output from the power amplifier output transformer (attenuator bypassed), Plug-in screw connector*5 Line output: 0dB*1, 10 kΩ RCA pin jack Recording output: 0dB*1, 10 kΩ, RCA pin jack Preamplifier output: 0dB*1, 10 kΩ, RCA pin jack	
<b>Control Input</b>	For controlling Inputs 1 – 3, Push-in terminal block No-voltage make contact input, open voltage: 3.3V DC, short-circuit current: 1mA or less	
<b>Control Input and Output</b>	D-sub connector (25-pin, female) Input: No-voltage make contact input, open voltage: 3.3V DC, short-circuit current: 1mA or less Output: Open collector output, withstand voltage: 30V DC, control current: 10mA or less (1) External control input • Activation of messages*6 • Activation of power • Activation and stop of Emergency Broadcast • Unit's broadcast cutoff (when activated by an external emergency equipment) (2) Status output • Irregularity of communications with the Remote Microphone and an expansion amplifier • AC power condition • DC power condition • Irregularity of the sound source of the Voice Announcement Board • Failure (FAULT) indication on • Power switch on	
<b>External Attenuator Control Output</b>	Plug-in screw connector*5, relay, no-voltage make contact output, transfer type, withstand voltage: 30V DC, 125V A contact current: 7A (DC) or less, 7A (AC) or less	
<b>Surveillance Input and Output*7</b>	D-sub connector (25-pin, female) Input: No-voltage make contact input, open voltage: 3.3V DC, short-circuit current: under 1mA Output: Open collector output, withstand voltage: 30V DC, control current: 10mA or less	
<b>Power Supply</b>	24V DC/0.1A, for supplying power to an optional Amplifier Control Unit RU-2001/ RU-2002, push-in terminal block*4	
<b>Chime Tone</b>	Built-in chime: 2-tone chime/ 2-tone chime (fast repeat)/4-tone chime (Up)/ Single-tone chime/ 4-tone chime (Up & Down)/ off Voice Announcement Board sound source: Pre-recorded chime*6	
<b>Function</b>	Two units stacking (VM-2120 or VM-2240) Emergency broadcast (sequential control) Broadcast priority control Surveillance (failure detection) function*7 Power supply to only one Remote Microphone (RM-200M), Line resistance: 40Ω or less (one way)	
<b>Operating Temperature</b>	0°C to +40°C	
<b>Finish</b>	Panel: ABS resin, dark gray (PANTONE 447C or its equivalent) Case: Steel plate, dark gray (PANTONE 446C or its equivalent)	
<b>Dimensions</b>	419 (W) × 143.3 (H) × 355.7 (D) mm	
<b>Weight</b>	12.5kg	14.5kg
<b>Accessory</b>	Power cable (2m) × 1, Miniature type time-lag fuse T2.5A × 1, Name label × 1, Volume cover × 4	
<b>Option</b>	Rack mounting bracket: MB-36, Input transformer: IT-450, Voice announcement board: EV-200M, Surveillance board: SV-200MA	

\*1 0dB = 1V

\*2 Can be transformer-balanced with the addition of an optional IT-450 input transformer.

\*3 For connection of the Paging Microphone PM-660D with a remote control switch.

\*4 Usable cable diameter: AWG26 – AWG20, 0.5 mm<sup>2</sup>.

\*5 Usable cable diameter: AWG24 – AWG12, 2.5 mm<sup>2</sup>.

\*6 An optional EV-200M Voice Announcement Board is required.

The chime sound source must be pre-recorded into CF (CompactFlash) card to be inserted into the EV-200M Board.

\*7 An optional SV-200MA Surveillance Board is required.

### >>> Input Transformer

**IT-450**

**Impedance:** 600Ω ±10%  
**Frequency Response:** 200Hz – 10kHz





# VM-2000 Series System Configuration



BGM Player / recorder



Telephone System(paging)



Remote Microphone RM-200M



Fault Indication Panel



External Control Switch Panel




•Audio input with External Control



•Other PA System



Emergency Detection System

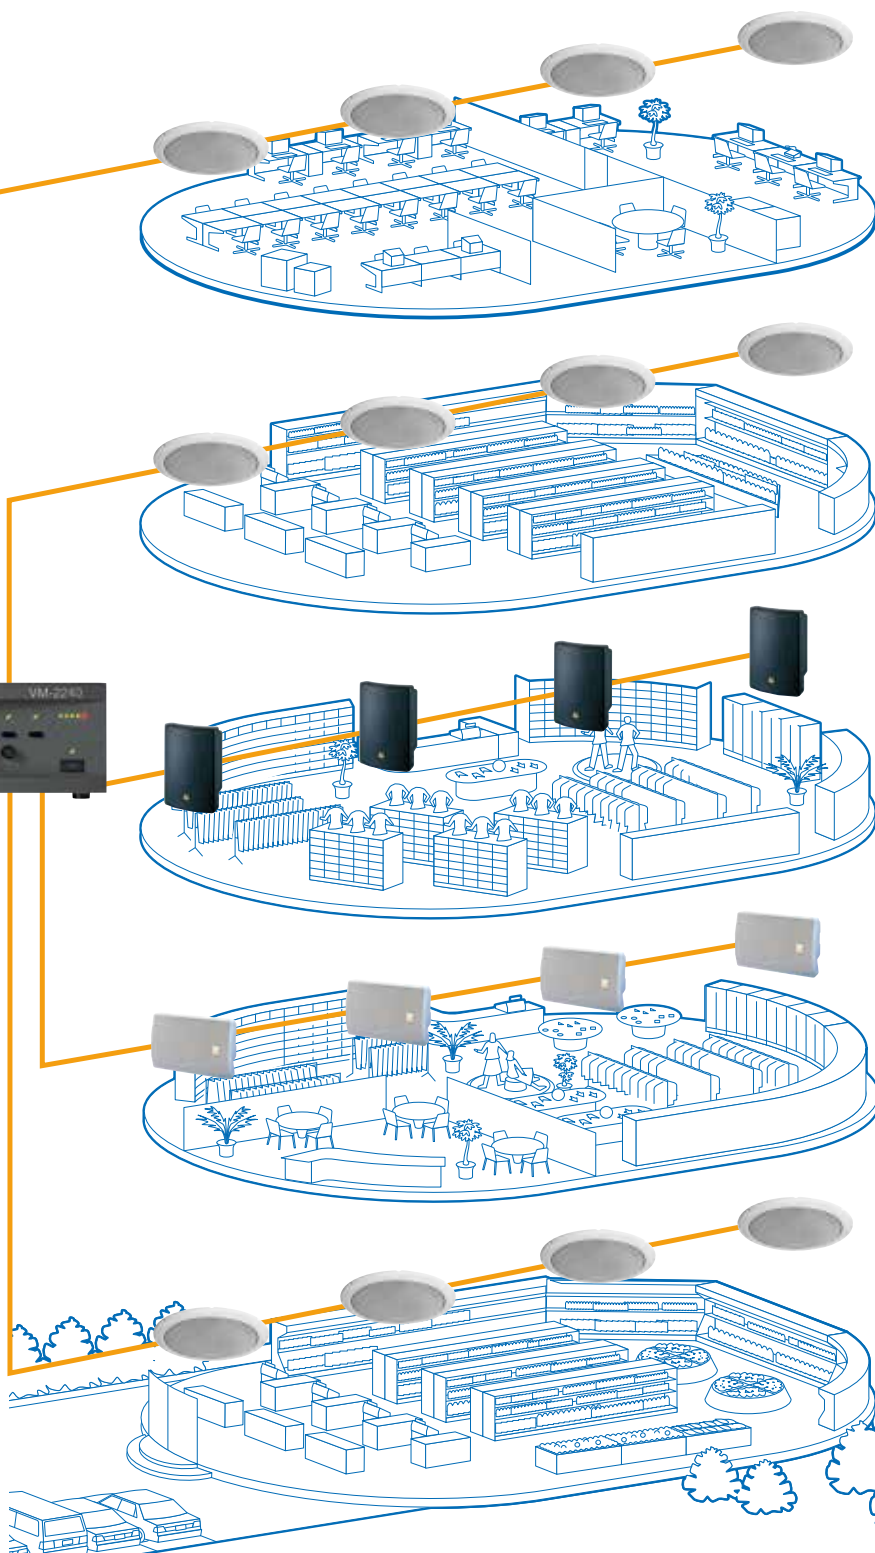

# Rack Mount Equipment

## Program Timer

### »» Program Timer

#### TT-208-AS



Model	TT-208-AS
Power Source	220 - 230 V AC, 50/60 Hz
Power Consumption	10W
Audio Output	Westminster Chime Level : 0 dB, 600 Ω
Frequency Response	20Hz – 20kHz
Synchronise Time	Send out pulse per 1 minute
Control Output	8 Channels contact switch (NO) 1 output contact switch (NO)
Display	Power indicator : Green, LCD Character : Back Light Green, USB Indicator PC Link : Orange

Operating Temperature	0°C to +40°C
Operating Humidity	Under 90% RH (no condensation)
Color	Front panel: Aluminum, Black, Alumite Case: SECC plate, black, Paint
Dimensions	420 (W) x 59 (H) x 342 (D) mm ( 16.54" x 2.32" x 13.46" )
Weight	3.2 kg
Option	Rack mounting bracket: MB-15B
Accessory	Power Cable ( YA-301 ) ...1 Removable terminal plug ( 2 pins ) ...12 CD Rom ( Software & Manual ) ...1

## Audio Player

### »» Audio Player

#### MD-200CTU-EB



Model	MD-200CTU-EB
Power Source	220-240 V AC, 50/60Hz
Power Consumption	8W
Frequency Response	20 - 20kHz, ± 3dB
Tuner Receiving Frequency	87.5 - 108MHz (50kHz step)
Audio Input	FM 75Ω unbalanced antenna terminals, USB port for memory stick (support up to 32GB, Type file: mp3 + wav), SD/ MMC card slot (support up to 32GB, Type file: mp3 + wav), CD port for disk (Type file: mp3)
Audio Output	RCA audio output L and R channels for FM , RCA audio output L and R channels for CD/USB/SD , RCA audio output L and R channels for PRIORITY

Channels of Memory Tuner	30 channels in total for FM broadcasts
Indicators	2 LCD Display light blue 2 LED Indicator light green
Operating Temperature	0°C to +40°C
Finish	Front Panel: Steel Plate, black color Case: Steel Plate, black color
Dimensions	484 (W) x 44 (H) x 250 (D) mm
Weight	3.5kg
Accessory	AC Power Cord, FM Radio Antenna, Remote Control

## Sound Repeater

### »» Desktop Sound Repeater

#### EV-20R



\*\*1 0dB = 1V

Model	EV-20R
Power Source	Supplied from an external 24 V DC/ 400 mA power supply or from an optional AD-246 AC adapter
Power Consumption	10W (rated output)
Wave Format	44.1kHz sampling frequency, 16-bit PCM (monaural)
Frequency Response	20Hz – 20kHz, ±3dB (1kHz) 50Hz – 14kHz, ±3dB (IT-450 mounted, 1kHz)
Distortion	1% or less (1kHz, rated output)
Recording System	USB data transfer or analog recording
Control Input	Play 1 – 4, stop: No-voltage make contact input, pulse make length: 200ms, open voltage: 30V DC, short-circuit current: 10mA, removable terminal block (22P)
Control Output	Busy: Contact capacity 30V DC/0.5A, removable terminal block(22P)
Input	Input/ Recording input: Mic/ Line changeable, -60dB**1 2.2kΩ (MIC), -20dB**1 10kΩ (LINE), unbalanced, phone jack Line input: 0dB**1, 10kΩ, unbalanced, removable terminal block(22P)
Output	Line output: 0dB**1, 600Ω, unbalanced, removable terminal block (22P) Headphone output: 0dB**1, 100Ω, unbalanced, phone jack Speaker output: 3W, 8Ω, removable terminal block (22P)
LED Indicator	POWER, USB, START/ STOP 1 – 4

Max. No. of Messages	4 Pre-recorded audio data: Message 1 Westminster chime Message 2 Ascending 4-tone chime Message 3 Descending 4-tone chime Message 4 None <b>Note:</b> The above audio sources can be overwritten by using the supplied software. These audio sources are also contained in the supplied CD-ROM as sample audio data.
Max. Recording Time	6 minutes
Messages Delay Time	0, 2s, or 4s (selectable)
Playback Interval Time	∞, 0, 5s, 10s, 30s, 1min, 5min, 10min, 30min or 1h (selectable)
Finish	ABS resin, black
Dimensions	210 (W) x 44.2 (H) x 181 (D) mm (excluding projection)
Weight	730g
Accessory	CD-ROM (USB data transfer software and sample chimes recorded) x1, Unbalanced-phone plug x1, USB cable(1m) x1, removable Terminal block (22 pins) x1, Rubber foot x4
Option	Rack mounting bracket: MB-WT3 (for rack mounting one EV-20R unit), MB-WT4 (for rack mounting two EV-20R units) AC adapter: AD-246



# Digital Announcers

## »» Digital Announcer

### EV-700



Model	EV-700
Power Source	Supplied from an external 24 V DC/ 400 mA power supply, removable terminal block (2 pins) or from an optional AD-246 AC adapter
Power Consumption	10W
Wave Format	44.1kHz / 32kHz sampling frequency, 16-bit PCM, WAV file (monaural)
Sound Source Rewriting Method	LAN data transfer/Analog recording/ Direct write to memory card using the setting software
Audio Input	MIC:-55dB <sup>1</sup> (microphone input volume control in maximum position), 600 Ω, unbalanced, ø6.3 phone jack (2P) LINE (rear): -20dB <sup>1</sup> (line input volume control in maximum position), 10kΩ, unbalanced, removable terminal block (12pins) LINE (front): -29dB <sup>1</sup> (line input volume control in maximum position), 10kΩ, unbalanced, RCA pin jack
Audio Output	LINE 1, 2: 0dB <sup>1</sup> , 600Ω, unbalanced, removable terminal block (12pins) Headphone: 0dB <sup>1</sup> , 100Ω, monaural, ø3.5 mini jack (3P)
Frequency Response	20Hz – 20kHz, ±3dB (1kHz) 50Hz – 14kHz, ±3dB (IT-450 mounted, 1kHz)
Distortion	3% or less (1kHz, rated output)
Storage Media	Compatible with Compact Flash™ specification Memory card
Number of Mountable Memory cards	2 (1 Memory card containing preset sound sources is supplied.) Backup operation available when 2 cards are mounted.
Number of Recordable Phrases	32768
Maximum Recording Time	About 3 hours (at 44.1kHz sampling rate) or about 4 hours (at 32 kHz sampling rate)
Audio Output Method	Single channel monaural
Number of Playback Programs	Direct mode: 16 programs      Binary mode: 256 programs 1 emergency message takes precedence over the above programs and is played back. R.E.M. (Recording Endless Message) playback <sup>2</sup> can be performed.

Control Input	Activations 1-16, playback pause, recording, erasure/clear, emergency playback, emergency recording, emergency pause No-voltage make contact input, pulse make length: 50 ms or more, open voltage: 30 V DC, short-circuit current: 10mA, removable terminal block (12 pins, 16 pins)
Control Output	Shorting outputs 1-8 (busy), Error: contact capacity: 30 V DC, 0.5 A, removable terminal block (8 pins)
Network	
Network I/F	100BASE-TX
Network protocol	TCP/IP, UDP, HTTP, FTP
Connector	RJ45 connector
Operating Display	7-segment LED, 5 digits
Operating Temperature	0°C to +40°C
Operating Humidity	90% RH or less (no condensation)
Finish	Panel: Aluminum, black, 30% gloss, paint Case: Pre-coated steel plate, black, 30% gloss
Dimensions	420 (W) x 44 (H) x 222 (D) mm
Weight	2.4 kg (5.29 lb)
Accessory	Memory card (1 GB, Containing prerecorded audio files) ...1, Rubber foot ...4, Removable terminal plug (2 pins) ...1, Removable terminal plug (8 pins) ...2, Removable terminal plug (16 pins) ...2, Front cover fixing screw ...2, CD (setting software) ...1
Option	AC adapter: AD-246 Rack mounting bracket: MB-15B

(<sup>1</sup>) 0dB = 1V

(<sup>2</sup>) An emergency broadcast function that repeatedly plays the sound source recorded on the spot with the highest priority in case of an emergency situation.

※ Line output can be converted to balanced type using an optional IT-450 transformer.

※ CompactFlash is a trademark of SanDisk Corporation.

# Speaker Selectors

## »» Speaker Selector

### SS-2010-AS



Model	SS-2010-AS
Voltage Source	24 V DC
Current Consumption	1.0A DC
Inputs	10 Inputs BGM, 10 Inputs Paging
Output	10 Outputs, each output channel max. 480W at 100V line
Controls (Front)	10 BGM Selectors, 10 Paging Selectors, 1 All Call Selector
Controls (Rear)	1-10 Paging Controls In, All Paging Control in

Indicator Led	10 BGM Selector LEDs, 10 Paging Selector LEDs, 1 All Call LED
Operating Temperature	0°C to +40°C
Finish	Front Panel : Aluminum Hair Line, Etching Black Case : Steel Plate, Black
Dimensions	482 (W) X 44 (H) X 320 (D) mm
Weight	3.2kg
Accessories	6P Connectors x 12, 2P Connector x 1

## »» Speaker Selector

### SS-1010



Model	SS-1010
Voltage Source	24 V DC
Current Consumption	0.4 A DC
Inputs	10 Inputs Zone, 1 Emergency Override
Output	10 Outputs Zone, each output max. 480W
Controls (Front)	10 Zone Selectors, 1 All Zone Selector for All Zone
Controls (Rear)	1-10 Zone Controls In, All Zone Control In for All Zone

Indicator Led	10 Zone Selector LEDs, 1 All Zone LED
Operating Temperature	0°C to +40°C
Finish	Front Panel : Aluminum Hair Line, Etching Black Case: Steel Plate, Painting Black
Dimensions	420 (W) x 44 (H) x 320 (D) mm
Weight	3.2kg
Accessories	6P Connectors x 12, 2P Connector x 1

## »» Speaker Selector

### SS-021B



Model	SS-021B
Type	10 lines speaker selector
Control Switch	10-individual speaker selector switch, 1 all-call switch with remot control facility
Max. Control Power	Up to 1,000 W
Terminals	M4 screw terminal, distance between barriers: 8.8 mm

Finish	Surface-treated steel plate, black, 30% gloss, paint
Dimensions	483 (W) x 88.5 (H) x 266.2 (D) mm
Weight	3.55 kg
Accessory	Indication card x1, Rack mounting screw (with washer) x4

»» Line Supervisory

# LS-3010-AS



Model	LS-3010-AS
Power Source	24 V DC, 45 mA
Measurement Frequency	50 Hz, 1 kHz
Measurement Range	20 Ω - 10 kΩ (1 W - 500 W)
Input	10 channels: 100 V from amplifier output
Output	10 channels: to speaker lines, max. load 500 W each channel
Control Output	10 channels: dry contact (DC 30 V, 1 A)
Fault Output	2 channels: common for all channel (1 - 10)
LED Indicator	10 LED channel (Normal: Green, Open: Orange, Short: Red), 4 LED timer (Green), 1 LED buzzer (Green), 1 LED reset (Green), 1 LED power (Green)

Switch	Timer: setting interval time(OFF, 1 min, 1 hour, 12 hour, 24 hour) Lamp Test, Calibrate, Measure Buzzer, Reset, 10 Channel
Operating Temperature	0°C to +40°C
Finish	Front Panel : Aluminum Hairline, Alumite Black Case: Steel Plate, Painting Black
Dimensions	482 (W) x 44 (H) x 320 (D) mm
Weight	3.3kg
Accessories	6P Connectors x 12, 2P Connector x 1

## Mixer Preamplifier and Optional Accessory

»» Mixer Preamplifier

# PP-025B




Model	PP-025B
Power Source	24 V DC
Power Consumption	200 mA or less
Inputs	Input 1-A: -2/-62 dB*, 600 Ω, balanced, φ6.3 mm phone jack (2P) Input 1-B: -2 dB*, 600 Ω, balanced, φ6.3 mm phone jack (2P) Input 2-A: -2/-62 dB*, 600 Ω, balanced, φ6.3 mm phone jack (2P) Input 2-B: -2 dB*, 600 Ω, balanced, φ6.3 mm phone jack (2P) Input 3-A: -2 dB*, 20 kΩ, unbalanced, φ6.3 mm phone jack (2P) Input 3-B: -2 dB*, 20 kΩ, unbalanced, φ6.3 mm phone jack (2P) Input 3-C: -2/-22 dB*, 50 kΩ, unbalanced, φ6.3 mm phone jack (2P)/RCA pin jack Input 3-D: -22 dB*, 50 kΩ, unbalanced, RCA pin jack
Outputs	Line out 1: 0 dB*, 600 Ω, balanced, all inputs (Inputs 1/2 are output when using the line out 2.), φ6.3 mm phone jack (2P) Line out 2: 0 dB*, 600 Ω, unbalanced (Input 3 is output.), φ6.3 mm phone jack (2P) Rec out : -10 dB*, 5 kΩ, unbalanced, all inputs (Inputs 1/2 are output when using the line out 2.), RCA pin jack
Frequency Response	50 Hz - 15 kHz ±3 dB (at 1 kHz)
Tone Control	100 Hz, 10 kHz ±10 dB
Signal to Noise Ratio	60 dB or more
Distortion	1 % or less

Priority	Priority order: Input 1> Input 2> Input 3 Priority signal: Input level
Finish	Panel: Pre-coated steel plate, black, 30%, gloss
Dimensions	482 (W) x 88.4 (H) x 218 (D) mm
Weight	3 kg
Accessory	Phone plug/phone plug connection cord (balanced) x1, Power supply cable x1, Rack mounting screw (with washer) x4, Rack mounting bracket (preinstalled on the unit) x2, Input indication label x1, 5P DIN plug x1
Option	Chime unit: CK-025

»» Optional Chime Unit for PP-025B

# CK-025




**Power Supply:** 24 V DC  
(supplied from PP-025B)  
**Chime:** Ascending 4-tone chime, 2-tone chime,  
1-tone chime, Dscending 4 tone chime  
**Accessories:** Chime connection cord.....1, Screw M3x6...1

## Power Amplifier and Optional Accessory

»» Fault Detection Circuit Module

# YA-1000A



Model	YA-1000A
Power Source	24 V DC (supplied from the power amplifier)
Power Consumption	20 mA
Input	LINE IN: Connects to the power amplifier's output (high impedance 100V line) M4 screw terminal, distance between barriers: 9 mm
Detected Fault Indication	Power amplifier's power indicator is etinguished
Fault Detection Output	Relay contact closes. Withstand voltage: 30 V DC, current capacity: 1A
Usable Amplifier	VP-1061, VP-1121, VP-1241, VP-1361, PA-3640VB
Weight	140 g
Accessory	Terminal block cover x1, Amplifier mounting screw x2, Cover mounting screw x2

»» Power Amplifier

# PA-3640VB



Model	PA-3640VB
Power Source	220 V AC, 50 Hz or 24 V DC
Power Consumption	1100 VA (at rated output)
Output Power	360 W
Input	2 Program inputs (parallel), 0 dB*, 100 kΩ, balanced 2 Priority inputs (parallel), 0 dB*, 100 kΩ, balanced
Output and Load Impedance	100 V / 27.8 Ω, 50 V / 6.9 Ω
S/N Ratio	80 dB or more
Distortion	2% or less (at rated output f = 1 kHz)
Frequency Response	40 - 16,000 Hz ±3 dB (at 1/3 rated output)
Finish	Panel: Surface-treated steel plate, black, 30% gloss, paint
Dimensions	483 (W) x 177 (H) x 332 (D) mm
Weight	27.8 kg
Accessory	Rack mounting screw (with washer) x4, Fuse (5A) x1, Fuse (30A) x2

## Multi-Channel Monitors

### »» Monitor Panel

#### MP-011



Model	MP-011
Power Source	24V DC
Power Consumption	400mA
Input	10 zones high impedance level: 50V, 70V, 100V (selectable) Line level: 0dBV (1V)
Monitor Speaker	33 x 140 mm dynamic speaker, 3W/ 8Ω

Meter	7-point LED meter
Control Signal Input	Emergency control signal (bypasses volume control) Talk switch signal (feedback prevention)
Dimensions	482 (W) x 44 (H) x 219.1 (D) mm
Weight	Approx. 2.45kg

### »» Monitor Panel

#### MP-032B



Model	MP-032B
Functions	Aural/ Visual, monitoring (up to 10 power amplifiers)
Controls	Channel selector switch, Monitor volume control, Watt meter, Line voltage selector switch
Speaker	Full-range 12cm speaker
Input Lines	25V (625Ω), 50V (2.5kΩ), 70V (5kΩ), 100V (10kΩ) switchable

Terminals	M4 screw terminals, distance between barriers: 8.8mm
Finish	Surface-treated steel plate, black
Dimensions	482 (W) x 133 (H) x 87 (D) mm
Weight	2.2kg
Accessory	Rack mounting screw (with washer) x 4

### »» Multi-Channel Monitor

#### MP-1216



\*0dB = 2.775V

Model	MP-1216
Power Source	220 – 240V AC, 50/ 60Hz
Power Consumption	25W
Max. Display Level	Speaker (High impedance: 100V Low impedance: 1200W/ 8Ω) Line: +10dB* (2.45V)
Level Meter	12-point display, -30dB – +6dB (0.3W – 1200W/ 8Ω)
Speaker Output	Max. 3W

Headphone Output	8Ω
Finish	Front panel: Alumite, black
Dimensions	482.6 (W) x 88.4 (H) x 312.7 (D) mm
Weight	5.3kg
Accessory	AC fuse, 250V T250 mA x 1, Rack mounting screw x4, Jumper strip x 16

### »» Monitor Panel

#### MP-210-AS



Model	MP-210-AS
Power Requirements	24 V DC
Current Consumption	30 mA
Input	10 zones high impedance level: 100V Line Level line: 40 dBV (100V)
Speaker Component	30 x 70 mm cone speaker 6W / 8Ω
Monitor Level	6-point LED display

Control Panel	Channel selector switch, Volume control switch
Color	Front panel: Black, Chassis and Case: Natural SECC
Dimensions	482 (W) x 44 (H) x 116.4 (D) mm (18.98" x 1.73" x 4.58")
Weight	Approx. 1.1kg (2.43lb)
Accessory	Removable terminal plug (2 pins) ...10

## Power Supplies and Batteries

### »» DC Power Supply Panel

#### AD-031B



Model	AD-031B
Power Source	220V AC (301H version), 110/ 220V AC (LH version), 50/ 60Hz
Power Consumption	530VA (rated output)
Input	24V DC, M4 screw terminal
Output	AC operation: 24V DC ±0.5V, 10A, M4 screw terminal DC operation: 1V below input DC voltage, M4 screw terminal
Main Power Output	24V DC ±0.5V, 200mA (provided only when operated on AC), M4 screw terminal
Finish	Panel: Surface-treated steel plate, black, 30% gloss, melamine baked paint
Dimensions	482 (W) x 132.6 (H) x 316 (D) mm
Weight	18.6kg
Accessory	Fuse (15A) x 1, Fuse (3A) x 1, Vinyl-covered tie x 1, Cable set x 1, Power cord (2m) x 1, Rack mounting screw (with washer) x 4

### »» NI-CAD Battery

#### NDC-2435 NDC-2460



**Nominal Voltage:** 24V  
**Nominal Capacity:** 3,500mAh (NDC-2435)  
 6,000mAh (NDC-2460), 5HR  
**Operating Temperature:** 0°C to + 45°C  
**Charging Current:** 350mA, 88 mA trickle charging (NDC-2435)  
 600mA, 150mA trickle charging (NDC-2460)

# Rack Mount Associated Equipment

## Power Switch Panel

### PS-011B



Model	PS-011B
Type	Power Remote Switch
Switch Capacity	5A at 250V AC, 10A at 125V AC
Finish	Surface-treated steel plate, black, 30% gloss, paint
Dimensions	482 (W) × 44.5 (H) × 90 (D) mm
Weight	650g
Accessory	Rack mounting screw (with washer) × 4, Fuse × 1

## 1-Size Perforated Panel

### PF-013B



## 2-Size Perforated Panel

### PF-023B

Model	PF-013B	PF-023B
Pantched Area Ratio	32%	
Finish	Pre-coated steel plate, black, 30% gloss	
Dimensions	482 (W) × 44 (H) × 10 (D) mm	482 (W) × 88.5 (H) × 10 (D) mm
Weight	160g	280g
Accessory	Rack mounting screw x 4 (with Fiber) × 4	

## Junction Box

### JB-031B



Model	JB-031B
No. Of Terminals	3 terminal blocks × 4 (18 terminals per block) (72 terminals in total)
Current capacity	250 V/ 20 A per terminal
Color	Black
Dimensions	483 (W) × 132.6 (H) × 285 (D) mm
Weight	3.5 kg

## 1-unit Size Perforated Panel

### PF-1100



Model	PF-1100
Finish	Aluminum, black
Dimensions	483 (W) × 44 (H) × 14.5 (D) mm
Weight	120g
Accessory	S tight (M5 x20) (Black) ×4

# Network-Related Systems

## Network Audio Adapters

### »» Network Audio Adapter

### NX-300



\*1 0dB = 1V

Model	NX-300
Power Source	24V DC (21.6 - 26.4 V), or AC adapter AD-246 (optional) or the equivalent
Power / Current Consumption	10 W (AC operation), 310 mA (DC operation)
Audio Input	2 channels, balanced (transformer isolated)/unbalanced changeable, 2 kΩ, LINE/MIC changeable, volume adjustable Rated input: -20 dB*1 (LINE)/-60 dB*1 (MIC) PAD function(-16 dB*1), removable terminal block (6 pins)
Audio Output	2 channels, balanced (transformer isolated), 600 Ω or less Rated output: 0 dB*1 (unbalanced input)/-2 dB*1 (balanced input), removable terminal block (6 pins)
Frequency Response	50Hz - 18kHz (48 kHz sampling frequency, PCM, 0 to -6 dB deviation referred to 1 kHz)
Distortion	0.2 % or less (1 kHz, LINE signal level, 48 kHz sampling frequency, PCM, BPF)
Signal to Noise Ratio	73 dB or more (LINE signal level, at rated output)
Separation	70 dB or more (1 kHz, LINE signal level, BPF)
Audio Format	WAV file
Number of Storable Audio Files	Max. 8
Storable Time of Audio Files	Max. 2 min. per audio file (16 kHz sampling frequency, sub-band-ADPCM, monaural operation)
Control Input	8 channels, no-voltage make contact input, open voltage: 24 V DC, short-circuit current: 2 mA or less, removable terminal block (9 pins) (Only Channel 8 equipped with failure detection.)
Control Input Failure Detection Section	Connection resistance to make the function inactive: 20 kΩ ±5 % Connection resistance to make the function active: 10 kΩ ±5 % Connector cable: Twisted pair cable (shielded type is recommended), Maximum cable distance: 10 m
Control Output	8 channels, open collector output (polarized), withstand voltage: 30 V DC, control current: 50 mA max., removable terminal block (9 pins) 2 channels, relay output (non-polar), withstand voltage: 30 V DC, control current: 500 mA max., removable terminal block (4 pins)
Network Selection	Network I/F: 1 OB ASE-T/100BASE-TX, Full-duplex/Half-duplex Auto-negotiation Network protocol: TCP, UDP, ARP, HTTP, RTP, IGMP, FTP, NTP Audio packet transmission system: Unicast (Up to 16 simultaneous transmissions), Multicast (Up to 64 simultaneous transmissions) Connector: RJ45 connector Voice sampling frequency: 8 kHz, 16 kHz, 32 kHz, 48 kHz (controllable on the software) Quantifying bit number: 16 bits Voice encoding method: PCM, Sub-band ADPCM (controllable on the software) Voice packet loss recovery: Silence insertion Audio delay time: Min. 20 ms
Operation	2 channels, Audio input level control (Convertible to Audio output level control)
Indicator	2 channels, audio input, SIGNAL (green)/PEAK (red), 2 channels, audio output, SIGNAL (green) LNK/ACT (green), BUSY (green), STATUS (green), ERROR (yellow), RUN (green)
Setting Switch	Reset, grand lift changeable, audio input 2 channels PAD changeable, audio input 2 channels LINE/MIC changeable
SD Section	For log storage (Max. 10000) Media: SD/SDHC card (Max. 32 GB) File system: FAT16, FAT32 * Not compatible with SDXC memory cards * Use only SD memory cards rated at 100mA current consumption or less. * No SD card provided.
Installation Method	Rack, Desk, Surface mount
Operating Temperature	-10°C to +50°C (0°C to +40°C when AC adapter is in use)
Operating Humidity	90 %RH or less (no condensation)
Finish	Pre-coated steel plate, black, 30 % gloss
Dimensions	210 (W) x 44.3 (H) x 258 (D) mm
Weight	1.7 kg
Accessory	Removable terminal plug (3 pins) x 1, Removable terminal plug (6 pins) x 2, Removable terminal plug (9 pins) x 2, Removable terminal plug (4 pins) x 1, Plastic foot x 4, Screw for fitting plastic foot x 4
Option	Rack mounting bracket: MB-15B-BK (for rack mounting one NX-300 unit), MB-15B-J (for rack mounting two NX-300 units) Wall mounting bracket: YC-850 AC adapter: AD-246

Note: The NX-300 cannot be connected to other equipment using the MB-15B-J bracket for rack mounting.  
When you need the AC adapter, be sure to consult your TOA dealer.

### »» AC Adapter

### AD-246

**Power Source:** 220 - 240V AC, 50/ 60Hz (ER/UK), 110 - 120V AC, 50/ 60Hz (US)  
**Output:** 24V DC, 1A  
**Current Consumption:** 270mA (rated output) (ER/ UK), 420mA (rated output) (US)  
**Cord Length:** 1.8m  
**Plug:** RC6705 center "+"  
**Operating Temperature:** 0°C to +40°C  
**Finish:** Case: Heat-resistant resin, black  
**Weight:** 130g  
**Accessory:** Power cord (2m) x 1





## Network Audio Adapter

# NX-100 NX-100S



\*0dB = 1V

Model	NX-100	NX-100S
<b>Power Source</b>	24V DC (removable terminal block (3 pins)), or AC adapter AD-246 (optional) or the equivalent	AC adapter AD-246 (optional) or the equivalent
<b>Current Consumption</b>	200mA (DC operation)	7W (when AD-246 (optional) is used)
<b>Audio Input</b>	1 channel (transformer-isolated), -58dB* to 0dB*, balanced (MIC/ LINE changeable, volume adjustable with volume control), 2kΩ, removable terminal block (3 pins)	1 channel (transformer-isolated), -58dB* to 0dB*, balanced (MIC/ LINE changeable, volume adjustable with volume control), 2kΩ, removable terminal block (3 pins), phantom power supply, (24V, can be set with the switch)
<b>Audio Output</b>	1 channel (transformer-isolated), balanced, 600Ω, removable terminal block (3 pins)	
<b>Frequency Response</b>	50Hz - 14kHz (when sampling frequency is 32kHz)	
<b>Distortion</b>	Under 0.3% (1kHz, when sampling frequency is 32kHz)	
<b>Control Input</b>	8 channels, no-voltage make contact input, open voltage: 12V DC, short-circuit current: 10mA, removable terminal block (9 pins)	
<b>Control Output</b>	8 channels, open collector output (polarized), withstand voltage: 30V DC, control current: 50mA max., removable terminal block (9 pins)	
<b>Network I/F</b>	10BASE-T/ 100BASE-TX, Auto-Negotiation	
<b>Serial I/F</b>	RS-232C (DCE I/F), D-sub connector (9P, male), 9600bps - 115200bps	-
<b>Network Protocol</b>	TCP, UDP, ARP, ICMP, HTTP, RTP, IGMP	
<b>Audio packet Transmission System</b>	Unicast (up to 4 simultaneous transmissions), Multicast (up to 64 simultaneous transmissions)	
<b>Operating Temperature</b>	0°C to +50°C (0°C to +40°C when AC adapter is in use)	0°C to +40°C
<b>Operating Humidity</b>	90% RH or less (no dew condensation should be produced)	
<b>Finish</b>	Steel plate, black, 30% gloss	
<b>Dimensions</b>	210 (W) × 44.7 (H) × 188 (D) mm	
<b>Weight</b>	1.2kg	
<b>Accessory</b>	CD (PC Installation & Operation software programs, Instruction manuals) × 1, Power supply removable terminal plug (3 pins) × 1, Audio I/O removable terminal plug (3 pins) × 2, Control I/O removable terminal plug (9 pins) × 2, RS-232C connector cover × 1, Bracket mounting screw × 8	CD (PC Installation & Operation software programs, Instruction manuals) × 1, Audio I/O removable terminal plug (3 pins) × 2, Ferrite clamp × 1, Control I/O removable terminal plug (9 pins) × 2, Bracket mounting screw × 8
<b>Option</b>	Rack mounting bracket: MB-15B-BK (for rack mounting one NX-100S unit), MB-15B-J (for rack mounting two NX-100S units) AC adapter: AD-246	

Note: When you need the AC adapter, be sure to consult your TOA dealer.

## IP Horn Speaker

## IP Horn Speaker

# IP-A1SC15



\*0dB = 1V

Model	IP-A1SC15
<b>Power Source</b>	PoE+ (IEEE802.3at Class 4), PoE (IEEE802.3af Class 3)
<b>Power Consumption</b>	22 W (at PoE+ powered, rated output) 13 W (at PoE powered, rated output) 5 W (IEC62368-1)
<b>Frequency Response</b>	280 Hz - 12.5 kHz
<b>Rated Output</b>	15 W (at PoE+ powered), 8 W (at PoE powered)
<b>Maximum Sound Pressure Level (1 m)</b>	124 dB (at PoE+ powered, 15 W, 1 m, 500 Hz to 2.5 kHz, peak level)
<b>Network</b>	Network I/F: 100BASE-TX, MDI/MDI-X, RJ-45
<b>Network Protocol</b>	TCP/IP, UDP, HTTP, RTP, ARP, ICMP, RTSP, SIP (RFC3261)
<b>Operating Humidity</b>	90% RH or less (no condensation)
<b>Operating Temperature</b>	-30°C to +55°C
<b>Finish</b>	Aluminium, ABS resin, Polycarbonate, Stainless steel, paint, off-white (RAL 9010 or equivalent)
<b>Dimensions</b>	222 (W) × 211 (H) × 276 (D) mm
<b>Weight</b>	1.4 kg
<b>Accessory</b>	Rear Cover x1, Removable Terminal Plug (3 pins) x2

# IP Network Intercom Systems

## Exchanges

### » IP Network Intercom Exchange

## N-8000EX / N-8010EX



\*0dB = 1V

Model	N-8000EX	N-8010EX
<b>Power Source</b>	230V AC (CE) or 220 - 230V AC (CE-GB), 50/ 60Hz	
<b>Power Consumption</b>	50W (at rated), 75W (max.)	
<b>Interface Section for station</b>	No. of lines: 16, No. of speech link: 4 internal, 8 external (N-8000EX)/ 1 internal, 2 external (N-8010EX) Type of speech path: space sharing/ time space sharing, Transmission system: 2 wire 160 kbps echo canceller transmission system Signal level: 0dB* or less, Transmission range: Max. 1500m (ø0.65mm (AWG 22), Loop resistance 170Ω) Speech method: Simultaneous conversation by way of echo canceller (Hands-free), simultaneous conversation by way of echo canceller or Half-duplex conversation by way of voice switch (handset), PTT conversation Connector: Dedicated, wiring method: 1 set of twisted pair cable, feeding voltage/current: 48V DC, Max. 70mA	
<b>Paging Output</b>	Audio: 2 channels Max. 0dB*, 600Ω, balanced Control: 2 channels, relay contact output, contact capacity: 24V DC/ 0.5 A	Station paging only
<b>Network Section</b> Network I/F Network Protocol Audio Packet Transmission System No. of Paging Destination Connector Voice Sampling Frequency Quantifying Bit No. Voice Encoding Method Audio Packet Omission Audio Delay Time	10BASE-T/ 100BASE-TX (Automatic-Negotiation) TCP/ IP, UDP, ARP, ICMP, HTTP, RTP, IGMP Unicast, Multicast  Unicast (max.16), Multicast (max.191) RJ45 connector 16kHz, 8kHz (Controllable on the software) 16 bit Sub-band ADPCM, Cryptosystem Silence insertion 80ms, 320ms (Controllable on the software)	
<b>Indication</b>	Network LNK/ ACT indication, Status Lamp, Power- on indication lamp	
<b>Others</b>	Firmware update function, System data hold function, Forced air-cooling, Time of day hold facility, Reset switch (front panel)	Firmware update function, System registration data entry hold facility, Forced air-cooling, Time of day hold facility, Reset switch (front panel)
<b>Installation Method</b>	Rack, Desk, Surface mount	
<b>Operating Temperature</b>	0°C to +40°C	
<b>Operating Humidity</b>	90% RH or less (no condensation)	
<b>Finish</b>	Pre-coated steel plate, black, 30% gloss	
<b>Dimensions</b>	420 (W) × 44.3 (H) × 356 (D) mm	420 (W) × 44.3 (H) × 349 (D) mm
<b>Weight</b>	4.1kg	4.2kg
<b>Accessory</b>	AC power cord (2m) × 1, CD (for PC setting, maintenance use) × 1, Removable terminal plug (4 pins) × 2, Mini-clamp plug (2 pins) × 20, Plastic foot × 4, Screw for fitting plastic foot × 4, Rack mounting bracket × 2, Screw for rack mounting × 4, Wall mounting bracket × 2, Screw for mounting bracket × 8, Screw for wall mounting × 4	AC power cord (2m) × 1, CD (for PC setting, maintenance use) × 1, Mini-clamp plug (2 pins) × 20, Plastic foot × 4, Screw for fitting plastic foot × 4, Rack mounting bracket × 2, Screw for rack mounting × 4, Wall mounting bracket × 2, Screw for mounting bracket × 8, Screw for wall mounting × 4

## Interfaces

### » Multi-Interface Unit

## N-8000MI



\*1 0dB = 1V

\*2 0dB = 0.775V

Model	N-8000MI
<b>Power Source</b>	230V AC, 50/ 60Hz
<b>Power Consumption</b>	19W (180mA) (at rated), 24W (230mA) (max.)
<b>Audio Input</b>	Input: 2 inputs (2P/ input), Max. 0dB* <sup>1</sup> , 600Ω or less, balanced, with a semi-fixed volume for adjustment (0 to -25dB) Control: 2 inputs (2P/ input), no-voltage make contact input, open voltage: 12V DC, short-circuit current: 10mA Removable terminal block (8 pins)
<b>Audio Output</b>	Output: 2 outputs (2P/ output), Max. 0dB* <sup>1</sup> , 600Ω or less, balanced Control: 2 outputs (2P/ output), relay contact output, contact capacity: 24V DC/ 0.5A Removable terminal block (8 pins)
<b>Contact Input</b>	16 inputs, no-voltage make contact input, open voltage: 12V DC, short-circuit current: 10mA, removable terminal block (18 pins)
<b>Contact Output</b>	16 outputs, relay contact output, contact capacity: 24V DC/ 0.5A, removable terminal block (18 pins)
<b>PBX I/F</b>	PBX input and output: 2 channels, Max.: 0dB* <sup>2</sup> or less, Average: -15dB* <sup>2</sup> or less, 600Ω, balanced, mini-clamp connector (2 pins), with adjustment functions for both input and output (Input: 0 to +15dB, Output: -15 to 0dB), Analog E & M interface
<b>Tie-line I/F</b>	Tie-line input and output: 2 channels, Max.: 0dB* <sup>2</sup> or less, Average: -15dB* <sup>2</sup> or less, 600Ω, balanced, mini-clamp connector (2 pins) Signal method: EXES-2000/ EXES-6000 tie-line method Selective signal: DTMF signal
<b>Others</b>	Firmware update function, System registration data entry hold facility, Time of day hold facility, Reset switch (front panel)

Network Section	10BASE-T/ 100BASE-TX (Automatic-Negotiation) TCP/ IP, UDP, ARP, ICMP, HTTP, RTP, IGMP Unicast, Multicast  Unicast (max.16), Multicast (max.191) RJ45 connector 16kHz, 8kHz (Controllable on the software) 16-bit Sub-band ADPCM, Cryptosystem Silence insertion 80ms, 320ms (Controllable on the software)
<b>Indication</b>	Network LNK/ ACT indication, Status Lamp, Power-on indication lamp
<b>Installation Method</b>	Rack, Desk, Surface mount
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	90% RH or less (no condensation)
<b>Finish</b>	Pre-coated steel plate, black, 30% gloss
<b>Dimensions</b>	420 (W) × 44.3 (H) × 239.5 (D) mm
<b>Weight</b>	2.8kg
<b>Accessory</b>	Power cord (2m) × 1, CD (for PC setting, maintenance use) × 1, Mini-clamp plug (2 pins) × 10, Removable terminal plug (8 pins) × 2, Removable terminal, plug (9 pins) × 4, Plastic foot × 4, Screw for fitting plastic foot × 4, Rack mounting bracket × 2, Screw for rack mounting × 4, Wall mounting bracket × 2, Screw for mounting bracket × 8, Screw for wall mounting × 4

## » Direct Select Unit

# N-8000DI



Model	N-8000DI
Power Source	220 – 240V AC, 50/ 60Hz
Power Consumption	16W (Max.)
Contact Input	32 inputs, no-voltage make contact input, open voltage: 24V DC, short-circuit current: 5mA or less, removable terminal block (20 pins) (1 common terminal for 4 inputs)
Contact Output	32 outputs, relay contact output, contact capacity: 24V DC/ 2 – 500mA, removable terminal block (32 pins)
Network Section	Network I/F Network Protocol Connector
	10BASE-T/ 100BASE-TX (Automatic-Negotiation) TCP/IP, UDP, ARP, ICMP, HTTP, RTP, IGMP RJ45 connector
Indication	Network LNK/ ACT indication, Status Lamp, Power-on indication lamp Channel indication lamps (32 channels)

Others	Firmware update function, System data hold function, Time of day hold facility, Reset switch (front panel)
Installation Method	Rack, Desk, Surface mount
Operating Temperature	0°C to +40°C
Operating Humidity	90% RH or less (no condensation)
Finish	Pre-coated steel plate, black, 30% gloss
Dimensions	420 (W) × 44.3 (H) × 267 (D) mm
Weight	2.8kg
Accessory	Power cord (2m) × 1, CD (for PC setting, maintenance use) × 1, Removable terminal plug (10 pins) × 4, Removable terminal plug (16 pins) × 4, Plastic foot × 4, Screw for fitting plastic foot × 4, Rack mounting bracket × 2, Screw for mounting bracket × 8, Screw for rack mounting × 4
Option	Wall mounting bracket: YC-850

## » Audio Interface Unit

# N-8000AF



Model	N-8000AF
Power Source	220 – 240V AC, 50/ 60Hz
Power Consumption	7W (Max.)
Audio Input	1 input (transformer isolated), -58dB* to 0dB*, 2kΩ, balanced (MIC/ LINE input, controllable on the software) with input volume control knob, removable terminal block (3 pins)
Audio Output	1 output (transformer isolated), 0dB*, 600Ω, balanced, removable terminal block (3 pins)
Contact Input	8 inputs, no-voltage make contact input, open voltage: 24V DC, short-circuit current: 5mA or less, removable terminal block (10 pins), (1 common terminal for 4 inputs)
Contact Output	8 outputs, relay contact output, output capacity: 24V DC/ 2 – 500mA, removable terminal block (16 pins)
Time Sync Input	1 input, no-voltage make contact input, open voltage: 24V DC, short-circuit current: 5mA or less, removable terminal block (2 pins)
Network Section	Network I/F Network Protocol Audio Packet Transmission System No. of Paging Destinations Connector Voice Sampling Frequency
	10BASE-T/ 100BASE-TX (Automatic-Negotiation) TCP/ IP, UDP, ARP, ICMP, HTTP, RTP, IGMP Unicast, Multicast Unicast (max. 8), Multicast (max. 191) RJ45 connector 16kHz, 8kHz (Controllable on the software)

Quantifying Bit No.	16-bit
Voice Encoding Method	Sub-band ADPCM, Cryptosystem
Voice Packet Loss Recovery	Silence insertion
Audio Delay Time	80ms, 320ms (Controllable on the software)
Indication	Network LNK/ ACT indication, Status Lamp, Power-on indication lamp, Signal lamp, Peak lamp
Others	Firmware update function, System data hold function, Time of day hold facility, Reset switch (front panel)
Installation Method	Rack, Desk, Surface mount
Operating Temperature	0°C to +40°C
Operating Humidity	90% RH or less (no condensation)
Finish	Pre-coated steel plate, black, 30% gloss
Dimensions	210 (W) × 44.3 (H) × 267 (D) mm
Weight	1.7kg
Accessory	Power cord (2m) × 1, CD (for PC setting, maintenance use) × 1, Removable terminal plug (2 pins) × 1, Removable terminal plug (3 pins) × 2, Removable terminal plug (5 pins) × 2, Removable terminal plug (8 pins) × 2, Plastic foot × 4, Screw for fitting plastic foot × 4
Option	Rack mounting bracket: MB-15B-BK (for rack mounting one N-8000AF unit), MB-15B-J (for rack mounting two N-8000AF units), Wall mounting bracket: YC-850

\*0dB = 1V

## » Telephone Interface Unit

# N-8000AL



Model	N-8000AL
Power Source	220 – 240V AC, 50/ 60Hz
Power Consumption	8W (Max.)
Line	No. of Telephone Line: 1 line Selective Signal Type: DTMF signal Monitoring Function: Line Loop detection Control Function: Caller ID function Wiring Method: 1 pair of twisted pair cables Short-circuit Current: 120mA Open Voltage: 24V DC Calling Signal Output Voltage: Max. 80V (0-p) AC (16Hz)
Network Section	Network I/F Network Protocol Audio Packet Transmission System No. of Paging Destinations Connector Voice Sampling Frequency Quantifying Bit No. Voice Encoding Method Voice Packet loss recovery Audio Delay Time
	10BASE-T/ 100BASE-TX (Automatic-Negotiation) TCP/ IP, UDP, ARP, ICMP, HTTP, RTP, IGMP Unicast, Multicast Unicast (max. 8), Multicast (max. 191) RJ45 connector 16kHz, 8kHz, (controllable on the software) 16-bit Sub-band ADPCM, Cryptosystem Silence Insertion 80ms, 320ms (controllable on the software)

Indication	Network LNK/ ACT indication, Status Lamp, Power-on indication lamp, Telephone status lamp
Other	Firmware update function, System data hold function, Time of day hold facility, Reset switch (front panel)
Installation Method	Rack, Desk, Surface mount
Operating Temperature	0°C to +40°C
Operating Humidity	90% RH or less (no condensation)
Finish	Pre-coated steel plate, black, 30% gloss
Dimensions	210 (W) × 44.3 (H) × 267 (D) mm
Weight	1.7kg
Accessory	Power cord (2m) × 1, CD (for PC setting, maintenance use) × 1, Mini-clamp plug (2 pins) × 1, Plastic foot × 4, Screw for fitting plastic foot × 4
Option	Rack mounting bracket: MB-15B-BK (for rack mounting one N-8000AL unit), MB-15B-J (for rack mounting two N-8000AL units), Wall mounting bracket: YC-850

## »» C/O Interface Unit

# N-8000CO



\*0dB = 1V

<b>Model</b>	N-8000CO
<b>Power Source</b>	220 – 240V AC, 50/ 60Hz
<b>Power Consumption</b>	7W (Max.)
<b>C/O Interface</b>	Public Switched telephone networks No. of Lines: 1 line Selective Signal Type: DTMF signal Signal System: Compatible with loop start signaling Wiring Method: 1 pair of twisted pair cables
<b>Network Section</b>	10BASE-T/ 100BASE-TX (Automatic-Negotiation) TCP/IP, UDP, ARP, ICMP, HTTP, RTP, IGMP Unicast, Multicast
Network I/F	
Network Protocol	
Audio Packet Transmission System	
No. of Paging Destinations	Unicast (max. 8), Multicast (max. 191)
Connector	RJ45 connector
Voice Sampling Frequency	16kHz, 8kHz (controllable on the software)
Quantifying Bit No.	16-bit
Voice Encoding Method	Sub-band ADPCM, Cryptosystem
Voice Packet Loss Recovery	Silence Insertion
Audio Delay Time	80ms, 320ms (controllable on the software)

<b>Indication</b>	Network LNK/ ACT indication, Status Lamp, Power-on indication lamp, Line in-use lamp
<b>Other</b>	Firmware update function, System data hold function, Time of day hold facility, Reset switch (front panel)
<b>Installation Method</b>	Rack, Desk, Surface mount
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	90% RH or less (no condensation)
<b>Finish</b>	Pre-coated steel plate, black, 30% gloss
<b>Dimensions</b>	210 (W) × 44.3 (H) × 267 (D) mm
<b>Weight</b>	1.7kg
<b>Accessory</b>	Power cord (2m) × 1, CD (for PC setting, maintenance use) × 1, Mini-clamp plug (2 pins) × 2, Plastic foot × 4, Screw for fitting plastic foot × 4
<b>Option</b>	Rack mounting bracket: MB-15B-BK (for rack mounting one N-8000CO unit) MB-15B-J (for rack mounting two N-8000CO units) Wall mounting bracket: YC-850

## »» Sub-Station Interface Unit

# N-8000RS / N-8010RS / N-8400RS



Model	N-8000RS	N-8010RS	N-8400RS
<b>Power Source</b>	220 – 240V AC, 50/ 60Hz		
<b>Power Consumption</b>	40W (at rated), 50W (max.)	32W (at rated), 38W (max.)	30W (at rated), 45W (max.)
<b>Interface Section for Sub-station</b>	No. of Lines 2 No. of Speech Link Transmission System Transmission Range 500m/ ø0.5mm (AWG24), 800m / ø0.65mm (AWG22), 1300m/ ø0.9mm (AWG19) Speech Method Half-duplex conversation by way of voice switch Connector Removable terminal block (3 pins) Wiring Method Two-core shielded cable Audio Output Conversation: Max. 1W, Paging: Max. 0.5W/ line Feeding Voltage/ current 22V DC, 30mA max. Control Signal Call in button detection, privacy button detection, hook detection	No. of Lines 1 No. of Speech Link Transmission System Transmission Range 500m/ ø0.5mm (AWG24), 800m/ ø0.65mm (AWG22), 1300m/ ø0.9mm (AWG19) Speech Method Half-duplex conversation by way of voice switch, Connector Removable terminal block (3 pins) Wiring Method Two-core shielded cable Audio Output Conversation: Max. 1W, Paging: Max. 0.5W/ line Feeding Voltage/ current 22V DC, 30mA max. Control Signal Call in button detection, privacy button detection, hook detection	No. of Lines 16 Internal: 1 / External: 2 No. of Speech Link Transmission System Transmission Range 1km/ ø0.5mm (AWG24), 1.5km/ ø0.65mm (AWG22), 2km/ ø0.9mm (AWG19) Speech Method Half-duplex conversation by way of voice switch (hands-free), Full-duplex (Handset) Connector Removable terminal block (4 pins) Wiring Method 2 sets of twisted pair cables Audio Output Conversation: Max. 1W, Paging: Max. 0.5W/ line Feeding Voltage/ current 24V DC, 30mA max. Control Signal Call in button detection, hook detection
<b>Network Section</b>	10BASE-T/ 100BASE-TX (Automatic-Negotiation) TCP/ IP, UDP, ARP, ICMP, HTTP, RTP, IGMP Unicast, Multicast		
Network I/F			
Network Protocol			
Audio Packet Transmission System			
No. of Paging Destinations	0, *Reception only		
Connector	RJ45 connector		
Voice Sampling Frequency	16kHz, 8kHz (Controllable on the software)		
Quantifying Bit No.	16-bit		
Voice Encoding Method	Sub-band ADPCM, Cryptosystem		
Voice Packet Loss Recovery	Silence insertion		
Audio Delay Time	80ms, 320ms (Controllable on the software)		
<b>Indication</b>	Network LNK/ ACT indication, Status Lamp, Power- on indication lamp		
<b>Other</b>	Firmware update function, System data hold function, Reset switch (front panel), Forced air cooling		
<b>Installation Method</b>	Rack, Desk, Surface mount		
<b>Operating Temperature</b>	0°C to +40°C		
<b>Operating Humidity</b>	90% RH or less (no condensation)		
<b>Finish</b>	Pre-coated steel plate, black, 30% gloss		
<b>Dimensions</b>	420 (W) × 44.3 (H) × 325.5 (D) mm		
<b>Weight</b>	3.9kg	3.8kg	4kg
<b>Accessory</b>	Power cord (2m) × 1, CD (for PC setting, maintenance use) × 1, Removable terminal plug (3 pins) × 16, Plastic foot × 4, Screw for fitting plastic foot × 4, Rack mounting bracket × 2, Screw for mounting bracket × 8, Screw for rack mounting × 4		
<b>Option</b>	Wall mounting bracket: YC-850		

# Stations

## IP Base Stations

### »» IP Multifunctional Master Station

## N-8600MS



\*0dB = 1V

Model	N-8600MS
<b>Power Source</b>	Power supply device that complies with IEEE802.3af standard or 12V DC (use of the optional AC adapter)
<b>Power Consumption</b>	Use of the AC adapter (12V DC): 2.5W (station only), Use of the PoE (48V DC): 3W
<b>Speech Method</b>	Hands-free or handset conversation
<b>Audio Frequency Range</b>	300Hz ~ 7kHz
<b>Hands-free</b>	5.7cm cone-type, max. output 0.5W, 8Ω speaker Omni-directional electret condenser microphone
<b>Handset</b>	Receive path: Dynamic type, Send path: Electret condenser microphone
<b>Headset Terminal</b>	Speaker: 150Ω, ø3.5mm mini jack, Microphone: -49dB*, ø3.5mm mini jack
<b>External Speaker Terminal</b>	Max. output 0.5W, 8Ω, screwless connector (2 pins)
<b>Network Section</b>	
Network I/F	10BASE-T/ 100BASE-TX (Automatic-Negotiation)
Network Protocol	TCP/ IP, UDP, ARP, ICMP, HTTP, RTP, IGMP
Audio Packet Transmission System	Unicast, Multicast
No. of Paging Destinations	Unicast (max. 16), Multicast (max. 191)
Connector	LAN: RJ45 connector (compatible with PoE)

<b>Voice Sampling Frequency</b>	16kHz, 8kHz (controllable on the software)
<b>Quantifying Bit No.</b>	16-bit
<b>Voice Encoding Method</b>	Sub-band ADPCM, Cryptosystem
<b>Voice Packet Loss Recovery</b>	Silence insertion
<b>Audio Delay Time</b>	80ms, 320ms (controllable on the software)
<b>Display</b>	LCD: Alphanumeric characters (16 characters × 2 lines)
<b>Indication</b>	Status lamp
<b>Installation Method</b>	Desk or Surface mounted master station (When mounting to the wall, use the optional YC-280)
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	90% RH or less (no condensation)
<b>Finish</b>	Body, Handset: ABS resin, gray
<b>Dimensions</b>	148 (W) × 208 (H) × 69.7 (D) mm (excluding a curl cord section)
<b>Weight</b>	770g
<b>Accessory</b>	CD (for PC setting, maintenance use) × 1
<b>Option</b>	Wall mounting bracket: YC-280 AC adapter: AD-1210P, AD-1215P

### »» IP Remote Microphone Station

## N-8610RM



Model	N-8610RM
<b>Power Source</b>	Power supply device that complies with IEEE802.3af standard or 12V DC (use of the optional AC adapter)
<b>Power Consumption</b>	Use of the AC adapter (12V DC): 4W (microphone only), 8.5W (when connecting 4 RM-210 Extension units) Use of the PoE (48V DC): 5.2W (microphone only), 7.5W (when connecting 4 RM-210, Extension units)
<b>Speech Method</b>	Hands-free conversation (use of goose-neck microphone)
<b>Audio Frequency Response</b>	300Hz ~ 7kHz
<b>Microphone</b>	Unidirectional electret condenser microphone
<b>Built-in Speaker</b>	6.6cm cone-type, rated output 0.3W, 8Ω
<b>Network Section</b>	
Network I/F	10BASE-T/ 100BASE-TX (Automatic-Negotiation)
Network Protocol	TCP/ IP, UDP, HTTP, RTP, ARP, ICMP, IGMP
Audio Packet Transmission System	Unicast, Multicast
No. of Paging Destinations	Unicast (max. 16), Multicast (max. 191)
Connector	RJ-45 connector (PoE compatible)
Voice Sampling Frequency	16kHz, 8kHz (Controllable on the software)
Quantifying Bit No.	16-bit
Voice Encoding Method	Sub-band ADPCM, Cryptosystem

<b>Voice Packet Loss Recovery</b>	Silence insertion
<b>Audio Delay Time</b>	80ms, 320ms (controllable on the software)
<b>No. of Connectable Expansion</b>	Max. 4 units (max. 2 units at PoE power supply)
<b>Operation</b>	Function keys (including a covered key), talk key
<b>Indicator</b>	Power indicator, Status indicator, Selection indicator, Broadcast status indicator, Microphone indicator
<b>Installation Method</b>	Desk/ Surface mounted master station (When mounting to the wall, use the optional WB-RM200.)
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	90% RH or less (no condensation)
<b>Finish</b>	ABS resin, blueish gray
<b>Dimensions</b>	190 (W) × 76.5 (H) × 215 (D) mm (excluding microphone)
<b>Weight</b>	700g
<b>Accessory</b>	CD (for PC setting, maintenance use) × 1, Ferrite clamp (for power supply cable, LAN cable and extension unit cable) × 1 each
<b>Option</b>	Remote microphone extension: RM-210 Wall mounting bracket: WB-RM200, AC adapter: AD-1215P



» IP Door Station  
**N-8640DS**



» IP Indoor Station  
**N-8650DS**



» Indoor Station Board  
**N-8640SB**



Model	N-8640DS	N-8650DS	N-8640SB
<b>Power Source</b>	Power supply device that complies with IEEE802.3af standard or 12V DC (supplied from the AC adapter (option))		
<b>Power Consumption</b>	Use of the AC adapter (12V DC): 3.5W (station only), Use of the PoE (48V DC): 5W		
<b>Speech Method</b>	Hands-free conversation		
<b>Audio Frequency Range</b>	300Hz – 7kHz		
<b>Hands-free</b>	Speaker: 3.5cm cone-type, max. output 0.5W, 8Ω Microphone.: Omni-directional electret condenser microphone		
<b>Contact Input</b>	1 channel, no-voltage make contact input, open circuit voltage: 5V DC, short circuit current: 10mA or less, unterminated ends		
<b>Contact Output</b>	Open collector output, 4 channels, withstand voltage: 30V DC, control current: Max. 50mA (4 output 1COMMON), unterminated ends Relay contact output, 1 channel, withstand voltage: 30V DC, control current: Max. 500mA, unterminated ends		
<b>External Speaker Terminal</b>	Maximum output 0.5W, 8Ω, unterminated ends		
<b>Network Section</b>	Network I/F Network Protocol Audio Packet Transmission System No. of Paging Destinations Connector Voice Sampling Frequency Quantifying Bit No. Voice Encoding Method Voice Packet Loss Recovery Audio Delay Time		
	10BASE-T/ 100BASE-TX (Automatic-Negotiation) TCP/ IP, UDP, ARP, ICMP, HTTP, RTP, IGMP Unicast, Multicast 0, *Reception only LAN: RJ45 connector (compatible with PoE) 16kHz, 8kHz (controllable on the software) 16-bit Sub-band ADPCM, Cryptosystem Silence insertion 80ms, 320ms (controllable on the software)		
<b>Indication</b>	Status lamp	-	-
<b>Installation Method</b>	Flush-mount or Surface-mount	-	-
<b>Operating Temperature</b>	-10°C to +50°C		
<b>Operating Humidity</b>	90% RH or less (no condensation)		
<b>Housing Protection</b>	BS EN62262: 2002: IK02 equivalent	-	-
<b>Dust/ Water Protection</b>	IP65 (Note that panel edges must be sealed at installation)	-	-
<b>Finish</b>	Panel: Stainless steel (SUS304), hairline Call button: Metal	ABS resin, dark gray	-
<b>Dimensions</b>	115 (W) × 162 (H) × 58.5 (D) mm	117.2 (W) × 162 (H) × 60 (D) mm	79 (W) × 134 (H) × 53 (D) mm (complete assembly of component parts)
<b>Weight</b>	780g	400g	350g (Total weight)
<b>Accessory</b>	Box mounting screw (No.6-32UNC × 20) × 4, Box mounting screw (M4 × 20) × 4, Waterproof washer × 4, LAN coupler × 1	Box mounting screw (No.6-32UNC × 20) × 4, Box mounting screw (M4 × 20) × 4, LAN coupler × 1	-
<b>Option</b>	AC adapter: AD-1210P, AD-1215P		
<b>Applicable Box (option)</b>	For flush-mount: 3-gang electrical box or Black Box YC-150 For wall surface-mount: Wall mount Box YS-13A		

Notes:

\* An AC adapter, when used as power source, cannot be put in the YS-13A, YC-150, or a 3-gang electrical box together with the N-8640DS and N-8650DS because such boxes do not have enough room to accommodate both.

\* Be sure to ground the frame ground terminal on the unit's rear for N-8640DS

## 2-Wire Stations

» Multifunction  
Master Station

**N-8000MS**



» Standard  
Master Station

**N-8010MS**



» Standard Hands-Free  
Master Station

**N-8011MS**



\*0dB = 1V

Model	N-8000MS	N-8010MS	N-8011MS
Power Source	48V DC (supplied from the IP intercom exchange (option))		
Power Consumption	1.8W (at rated), 2.4W (max.)		
Wiring Method	1 set of twisted pair cable		
Transmission System	2 wire 160kbps echo canceller transmission system		
Signal Level	0dB* or less		
Speech Method	Hands-free or handset conversation		Hands-free conversation
Audio Frequency Range	300Hz – 7kHz		
Transmission Range	Max. 1500m (ø0.65mm, Loop resistance 170Ω)		
Hands-free	Speaker: 0.6W, 8Ω, 5.7cm cone-type Microphone: Omni-directional electret condenser microphone		
Handset	Receive path: Dynamic type Send path: Electret condenser microphone		-
Display	LCD: Alphanumeric characters (16 characters × 2 lines)	-	-
Indication	Status lamp		
Line Connecting Terminal	RJ-11 modular jack		
Headset Terminal	Speaker: 3mW, 32Ω Microphone: -49dB*, ø3.5mm mini jack	-	-
External Speaker Terminal	0.6W, 8Ω, screwless connector (2 pins)	-	-
Installation Method	Desk or Surface mounted master station (When mounting to the wall, use the optional bracket: YC-280)		Desk or Surface mounted master station (When mounting to the wall, use the optional: YC-290.)
Operating Temperature	0°C to +40°C		
Operating Humidity	90% RH or less (no condensation)		
Finish	Body, Handset: ABS resin, gray		
Dimensions	148 (W) × 208 (H) × 69.7 (D) mm (excluding a curl cord section)		92 (W) × 195 (H) × 57.9 (D) mm
Weight	800g	700g	400g
Accessory	Connecting cord (3m) × 1		
Option	Wall mounting bracket: YC-280		Wall mounting bracket: YC-290

»» Industrial-Use  
Master Station

## N-8020MS



»» Flush-Mount  
Master Station

## N-8033MS



»» Flush-Mount Hands-Free  
Master Station

## N-8031MS



\*0dB = 1V

Model	N-8020MS		N-8033MS	N-8031MS
Power Source	48V DC (supplied from the IP intercom exchange (optional))			
Power Consumption	1.8W (at rated), 2.4W (max.)			
Wiring Method	1 set of twisted pair cable			
Transmission System	2 wire 160kbps echo canceller transmission system			
Signal Level	0dB* or less			
Speech Method	Hands-free or handset conversation	Hands-free conversation		Hands-free conversation (Handset conversation can be established in conjunction with the RS-191 (option))
Audio Frequency Range	300Hz – 7kHz			
Transmission Range	Max. 1500m (ø0.65mm, Loop resistance 170Ω)			
Hands-free	Speaker: 0.6W, 8Ω, 5.7cm cone-type Microphone: Omni-directional electret condenser microphone			
Handset	Receive path: Dynamic type Send path: Electret condenser microphone	-	-	
Indication	Status lamp			
Dial-in Contact Output	Open collector output (polarized) Withstand voltage: Max. 30V DC Control current: Max. 50mA, screwless connector (2 pins)	-	-	
Line Connecting Terminal	RJ-11 modular jack	Pin header (2 pins)		
External Dial Input	-	No-voltage make contact input, open voltage: 5V DC, short-circuit current: 1mA, screwless connector (5 pins)		
External Speaker Terminal	0.6W, 8Ω, screwless connector (2 pins)	-	-	
Installation Method	Desk/Surface mounted master station (When mounting to the wall, use the optional YC-280)	Flush-mount or Surface-mount		
Operating Temperature	-10°C to +50°C	0°C to +40°C		
Operating Humidity	90% RH or less (no condensation)			
Dust/ Water Protection	IP54	IP65 (Note that panel edges must be sealed at installation)	-	
Resistance to Environment	-	Passed our chemical-resistant test		-
Finish	Body, Handset: ABS resin, gray	Membrane switch (Front pasting): Polyester film	Panel: Stainless steel (SUS304), hairline	
Dimensions	170 (W) × 220 (H) × 91 (D) mm (excluding a curl cord and projection sections)	115 (W) × 254 (H) × 51 (D) mm	115 (W) × 254 (H) × 54.6 (D) mm	
Weight	1kg	850g		
Accessory	Rubber cap × 2	Box mounting screw (M4 × 35) × 4, Acoustic absorbent × 1, Removable terminal plug (2 pins, preinstalled on the unit) × 1	Box mounting screw (No.6-32UNC × 18) × 4, Box mounting screw (M4 × 25) × 4, Removable terminal plug (2 pins, preinstalled on the unit) × 1, Handset jumper (8 pins, preinstalled on the unit) × 1, Ferrite clamp ×1, Acoustic absorbent x 1	
Option	Wall mounting bracket: YC-280	Back Box YC-841	For flush-mount: Back Box YC-241 Wall surface-mount: Wall mount Box YC-251 Handset: RS-191	

»» Handset for N-8031MS

## RS-191

**Handset Receiver:** Dynamic type  
**Handset Transmitter:** Electret condenser type  
**Operating Temperature:** 0°C to +40°C  
 (Temperature range not to freeze the speaker and switch)  
**Finish:** ABS resin, pale white  
**Dimensions:** 116 (W) × 220 (H) × 70 (D) mm  
**Weight:** 330g  
**Accessory:** Box mounting screw (M4 × 25) × 4,  
 Box mounting screw (No.6-32UNC × 8) × 4



»» Door Station

## N-8050DS



»» Door Station Board

## N-8050SB



»» Master Station Board

## N-8031SB



\*0dB = 1V

Model	N-8050DS	N-8050SB	N-8031SB
Power Source	48V DC (supplied from the IP network intercom exchange (option))		
Power Consumption	1.8W (rated), 2.4W (max.)		
Wiring Method	1 set of twisted pair cable	Non-polar one pair stranded wire system	
Transmission System	2 wire 160kbps echo canceller transmission system		
Signal Level	0dB* or less		
Speech Method	Hands-free conversation		Hands-free conversation (Handset conversation can be established in conjunction with the RS-191(option))
Audio Frequency Range	300Hz – 7kHz		
Transmission Range	Max. 1500m (ø0.65mm), Loop resistance 170Ω)		
Hands-free	Speaker: 1W, 8Ω, 3.5cm cone-type, Microphone.: Omni-directional electret condenser microphone		Speaker: 0.6W, 8Ω, 5.7cm cone-type, Microphone: Omni-directional electret condenser microphone
Contact Output	Open collector output, withstand voltage: Max. 30V DC, control current: Max. 50mA, one shot: can be set from 1 to 9 sec, screw terminal (polarized)		-
Line Connecting Terminal	2 wire, screw terminal (non-polar)	2 wire, screw terminal (non-polar)	Pin header (2 pins)
Status Indicator LED Connecting Terminal	-	Solderless conn ector (5 pins, male), open voltage: 5V, max. load current: 4.1mA	Solderless connector (2 pins, male), open voltage: 5V, max. load current: 5mA
Dial Input	-	-	Solderless connector (10 pins, male), open voltage: 3.3V DC, short-circuit current: 1mA
External Dial Input	-	-	No-voltage make contact input, open voltage: 5V DC, short-circuit current: 1mA, screwless connector (5 pins)
Call Button Connecting Terminal	-	Solderless connector (5 pins, male), open voltage: 3.3V DC, short-circuit current: 1.5mA	-
Installation Method	Flush-mount or Surface-mount	-	-
Operating Temperature	-10°C to +50°C		0°C to +40°C
Operating Humidity	90% RH or less (no condensation)		
Housing Protection	BS EN62262: 2002: IK02 equivalent	-	-
Dust/ Water Protection	IP54 (Note that panel edges must be sealed at installation)	-	-
Finish	Panel: Stainless steel (SUS304), hairline Call button: Metal	-	-
Dimensions	115 (W) × 162 (H) × 54 (D) mm	67 (W) × 128.3 (H) × 26 (D) mm	70 (W) × 185 (H) × 20.6 (D) mm
Weight	680g	100g (including accessories)	205g (including accessories)
Accessory	Box mounting screw (No.6-32UNC × 18) × 4, Box mounting screw (M4 × 25) × 4, Acoustic absorbent (made of felt) × 1	Hands-free speaker (with connection cord) × 1, Hands-free microphone (with connection cord) × 1	Removable terminal plug (2 pins, preinstalled on the unit) × 1, Handset jumper (8 pins, preinstalled on the unit) × 1, Hands-free speaker (with connection cord) × 1, Hands-free microphone (with connection cord) × 1, Ferrite clamp ×1
Option	For flush-mount: 3-gang electrical box or Back Box YC-150 For wall surface-mount: Wall mount Box YS-13A	-	Handset: RS-191

»» N-8000 SIP Gateway

## N-8000SG

**Operating System:**  
Windows® 7 Professional (32/64bit)  
**License:** "USB Dongle" required



## 2-Core Shielded Cable Type Stations

» Substation  
(Emergency Use)

**RS-180**



» Substation (Outdoor  
Vandal-Resistant)

**RS-170**



» Substation (Indoor  
Vandal-Resistant)

**RS-160**

» Substation  
(Indoor)

**RS-150**



Model	RS-180	RS-170	RS-160	RS-150
Rated Input	1W			
Rated Impedance	625Ω (1W/ 25V)			
Internal Speaker	4cm cone-type			
Control Output	Open collector, withstand voltage: 30V DC, control current 30mA (The open collector output is kept turned on till the conversation is finished after the call button was pressed.)	-	-	-
Wiring	Two-core shielded cable			
Transmission Range	0.5km, ø0.5mm (AWG24), 0.8km, ø0.65mm (AWG22), 1.3km, ø0.9mm (AWG19)			
Operating Temperature	-10°C to +50°C (Temperature range not to freeze the speaker and switch)			
Finish	Panel: Stainless steel, hairline, Call button: Metal Printed circuit board: Weather-resistant coating	Panel: Stainless steel, hairline Call button: Metal	Panel: Stainless steel hairline Call button: Resin	Panel: Stainless steel hairline Call button: Resin
Dimensions	120 (W) × 120 (H) × 58.5 (D) mm	120 (W) × 120 (H) × 57.5 (D) mm	120 (W) × 120 (H) × 48.5 (D) mm	120 (W) × 120 (H) × 48.5 (D) mm
Weight	570g	540g	410g	410g
Accessory	Box mounting screw (No.6-32UNC × 8) × 4, Box mounting screw (M4 × 25) × 4			Box mounting screw (No.6-32UNC × 18) × 4, Box mounting screw (M4 × 25) × 4
Option	For flush-mount: 2-gang electrical box: YC-302 For surface mount: Indoor wall-mount box: YC-822 Outdoor wall-mount box: YC-823		For flush-mount: 2-gang electrical box: YC-302, For surface-mount: Indoor wall-mount box: YC-822	

» IP Intercom Switch Panel

**RS-144**

**RS-143**

**RS-140**



Model	RS-144	RS-143	RS-140
Call-In Switch	Momentary (EMERGENCY, NORMAL)	Momentary	
Privacy Switch	Latching		
Indication	-	-	When called: Call LED (red) flashing In conversation: Call LED (red) In privacy: Privacy LED (red)
Wiring	Two-core shielded cable		
Transmission Range	0.5km/ ø0.5mm (AWG24), 0.8km/ ø0.65mm (AWG22), 1.3km/ ø0.9mm (AWG19)		
Operating Temperature	0°C to +40°C		
Finish	Panel: Stainless steel, hairline Call-in Switch: Resin, red Privacy Switch: Resin, white	Panel: Stainless steel, hairline Call-in Switch: Resin, red	Panel: Stainless steel, hairline Call-in Switch: Resin, red Privacy Switch: Resin, white
Dimensions	70 (W) × 115 (H) × 28.6 (D) mm		
Weight	80g		
Accessory	Mounting bracket × 1, Bracket mounting screw (No.6-32UNC × 18) × 2, Box mounting screw (M4 × 30) × 2, Box mounting screw (No.6-32UNC× 30) × 2		
Option	Flush-mount box: YC-801, Wall-mount box: YC-802		

» Handset for RS-144, RS-143 and RS-140

**RS-141**

**Handset Receiver:** Dynamic type

**Handset Transmitter:** Electret condenser type

**Wiring:** Two-core shielded cable

**Handset Receiver Volume Control:** Slide volume,  
Max. control level: 12 – 18dB

**Operating Temperature:** 0°C to +40°C

**Finish:** ABS resin, pale white

**Dimensions:** 116 (W) × 220 (H) × 71 (D) mm

**Weight:** 350g

**Accessory:** Box mounting screw (M4 × 25) × 4,  
Box mounting screw (No.6-32UNC × 18) × 4

**Option:** For flush-mount: 2-gang electrical box YC-302  
For surface-mount: Indoor wall-mount box YC-822



» IP Intercom Switch Board for RS-141, N-8000RS and N-8010RS

**RS-142**

**Call-in Switch Wiring:** 4 cables (for 2 momentary switches)

**Wiring:** Two-core shielded cable

**Transmission Range:** 0.5km/ ø0.5mm (AWG24),  
0.8km/ ø0.65mm (AWG22), 1.3km/ ø0.9mm (AWG19)

**Operating Temperature:** 0°C to +40°C

**Weight:** 30g





## 4-Wire Stations

### »» Analogue Standard Master Station

## N-8410MS



Model	N-8410MS
Power Source	24V DC (supplied from the sub station interface unit N-8400RS)
Current Consumption	Max. 30mA
Wiring Method	2 set of twisted pair cable
Transmission System	4 wire baseband transmission system
Signal Level	25dB* (up), 0dB* or less (down)
Speech Method	Hands-free or handset conversation
Audio Frequency Range	300Hz – 7kHz
Transmission Range	1km/ ø0.5mm (AWG24), 1.5km/ ø0.65mm (AWG22), 2km/ ø0.9mm (AWG19)
Hands-free	Speaker: 0.6W, 8Ω, 5.7cm cone-type, Microphone: Omnidirectional electret condenser microphone Speaker volume control: 3-step switch (1-step, 4dB)

Handset	Receive path: Dynamic type Send path: Electret condenser microphone Handset receiver volume control: rotary volume Max. control level: 12 – 18dB
Indication	Status lamp
Line Connecting Terminal	RJ-11 modular jack
Installation Method	Desk or Surface mounted master station (When mounting to the wall, use the optional bracket: YC-280.)
Operating Temperature	0°C to +40°C
Operating Humidity	90% RH or less (no condensation)
Finish	Body, Handset: ABS resin, Gray
Dimensions	148 (W) × 280 (H) × 70.5 (D) mm (excluding a curl cord section)
Weight	720g
Accessory	Connection cord (3m) × 1
Option	Wall mounting bracket: YC-280

\*0dB = 1V

### »» Substation (Emergency Use)

## RS-480



### »» Substation (Outdoor Vandal-Resistant)

## RS-470



### »» Substation (Indoor Vandal-Resistant)

## RS-460

### »» Substation (Indoor)

## RS-450



Model	RS-480	RS-470	RS-460	RS-450
Call-In Switch	Momentary (Emergency call: Press twice within 400ms)			
Rated Input	1W			
Control Output	Open collector, max. controlled Voltage: 30VDC, Control Current: 30mA	-	-	-
Internal Speaker	Cone-type			
Internal Mic	Electret condenser type			
Indicator	When called: LED (red) flashing In conversation: LED (red)	-	-	-
Wiring	Twisted pair cables (2-pair)			
Transmission Range	1km/ ø0.5mm (AWG24) 1.5km/ ø0.65mm (AWG22) 2km/ ø0.9mm (AWG19)			
Operating Temperature	-10°C to +50°C (Temperature range not to freeze the speaker and switch)			
Housing Protection	BS EN62262: 2002: IK02 equivalent	-	-	-
Dust/ Water Protection	IP54	-	-	-
Finish	Panel: Stainless steel, hairline Call Switch: Metal, silver Circuit board: Weather-resistant coating	Panel: Stainless steel, hairline Call Switch: Metal, silver		Panel: Stainless steel, hairline Call Switch: Resin, black
Dimensions	120 (W) × 120 (H) × 50.5 (D) mm	120 (W) × 120 (H) × 49.5 (D) mm		120 (W) × 120 (H) × 41.5 (D) mm
Weight	575g	550g	540g	510g
Accessory	Box mounting screw (No.6-32UNC × 8) × 4, Box mounting screw (M4 × 25) × 4	Box mounting screw (No.6-32UNC × 18) × 4 Box mounting screw (M4 × 25) × 4		
Applicable Box	For flush-mount: 2-gang electrical box: YC-302 (option) For surface-mount: Indoor wall-mount box YC-822 (option) Outdoor wall-mount box YC-823 (option)		For flush-mount: 2-gang electrical box: YC-302 (option) For surface-mount: Indoor wall-mount box YC-822 (option)	

### »» Handset for RS-480

## RS-481

**Handset Receiver:** Dynamic type  
**Handset Transmitter:** Electret condenser type  
**Handset Receiver Volume Control:** Slide volume, Maximum attenuation level: 12 – 18dB  
**Operating Temperature:** 0°C to +40°C  
**Finish:** ABS resin, pale white  
**Dimensions:** 116 (W) × 220 (H) × 71 (D) mm  
**Weight:** 365g  
**Accessory:** Box mounting screw (No.6-32UNC × 18) × 4,  
Box mounting screw (M4 × 25) × 4  
**Applicable Box:** 2-gang electrical box: YC-302 (option)



### »» IP Intercom Switch Board for RS-481, RS-142 and N-8400RS

## RS-442

**Call Button Wiring:** 6 cables (for 3 momentary switches)  
**Rated Input:** 1W  
**Control Output:** Open collector, Max. controlled voltage: 30 V DC  
Control current: 30 mA  
**Microphone:** Electret condenser microphone  
**Wiring:** Twisted pair cables (2 pairs)  
**Transmission Range:** 1 km/ ø0.5 mm (AWG24)  
1.5 km/ ø0.65 mm (AWG22), 2 km/ ø0.9 mm (AWG19)  
**Operating Temperature:** 0°C to + 40°C  
**Weight:** 140 g



# Mounting Brackets and Optional Accessories

## »» Terminal Board

### E-7000TB



Model	E-7000TB
Line Capacity	80 (40 lines)
Line Connection Terminal	Clip terminal
Finish	Panel: Surface-treated steel plate, black, 30% gloss
Dimensions	482 (W) × 132.6 (H) × 108.8 (D) mm
Weight	2.5kg
Accessory	Rack mounting screw × 4, Fiber washer × 4, Name plate × 4, Cord clamp × 6

## »» AC Adapter

### AD-1210P



Model	AD-1210P
Power Source	100 - 240V AC, 50/60 Hz
Output	12V DC, 1.5A
Current Consumption	0.5A AC Input 100V(rated output)
Cord Length	1.8m
Plug	Conductor: center "+", ø5.5 × ø2.1 × L9.5mm
Operating Temperature	0°C to +40°C
Finish	Case: Polycarbonate, black
Weight	130g

## »» Wall-Mount Bracket

### YC-850



## »» Wall-Mount Bracket

### YC-290



## »» Wall-Mount Bracket

### YC-280



Model	YC-850	YC-290	YC-280
Finish	Surface-treated steel plate, black, 30% gloss	Surface-treated steel plate, gray, paint	Surface-treated steel plate, gray, paint
Dimensions	451 (W) × 220 (H) × 10 (D) mm	64 (W) × 131.5 (H) × 31.8 (D) mm	100 (W) × 140 (H) × 31.8 (D) mm
Applicable Model	N-8000RS, N-8010RS, N-8400RS, N-8000DI N-8000AF, N-8000AL, N-8000CO	N-8011MS	N-8000MS, N-8010MS, N-8020MS, N-8410MS N-8510MS, N-8600MS

## »» Surface-Mount Back Box

### YC-251



## »» Flush-Mount Back Box

### YC-241



## »» Surface-Mount Back Box

### YC-150



## »» Surface-Mount Back Box

### YS-13A



Model	YC-251	YC-241	YC-150	YC-13A
Finish	Surface-treated steel plate, white	Colored chrome painting	Zinc-plating	Zinc-plating
Dimensions	124 (W) × 258.5 (H) × 50.5 (D) mm	276 (W) × 119 (H) × 67 (D) mm	184 (W) × 119 (H) × 57 (D) mm	163.5 (W) × 114.5 (H) × 55 (D) mm
Applicable Model	N-8031MS	N-8031MS	N-8050DS, N-8640DS	N-8050DS, N-8640DS

## »» 2-Gang Electrical Box with Cover

### YC-302



## »» Back Box

### YC-841



## »» Outdoor Wall-Mount Box

### YC-823



## »» Indoor Wall-Mount Box


### YC-822




Model	YC-302	YC-841	YC-823	YC-822
Finish	SPHT, MFZn4 (glazed chromate)	Surface-treated steel plate, white	Stainless plate, off-white	Surface-treated steel plate, off-white
Dimensions	Outlet box: 102 (W) × 102 (H) × 44 (D) mm Cover: 106 (W) × 106 (H) × 13 (D) mm	119 (W) × 258 (H) × 57 (D) mm	124 (W) × 124 (H) × 62 (D) mm	124 (W) × 124 (H) × 61 (D) mm
Applicable Model	RS-150, RS-160, RS-170, RS-180, RS-450, RS-460, RS-470, RS-480	N-8033MS	YC-823	YC-822

# N-8000 System Overview

## Direct Network Connection

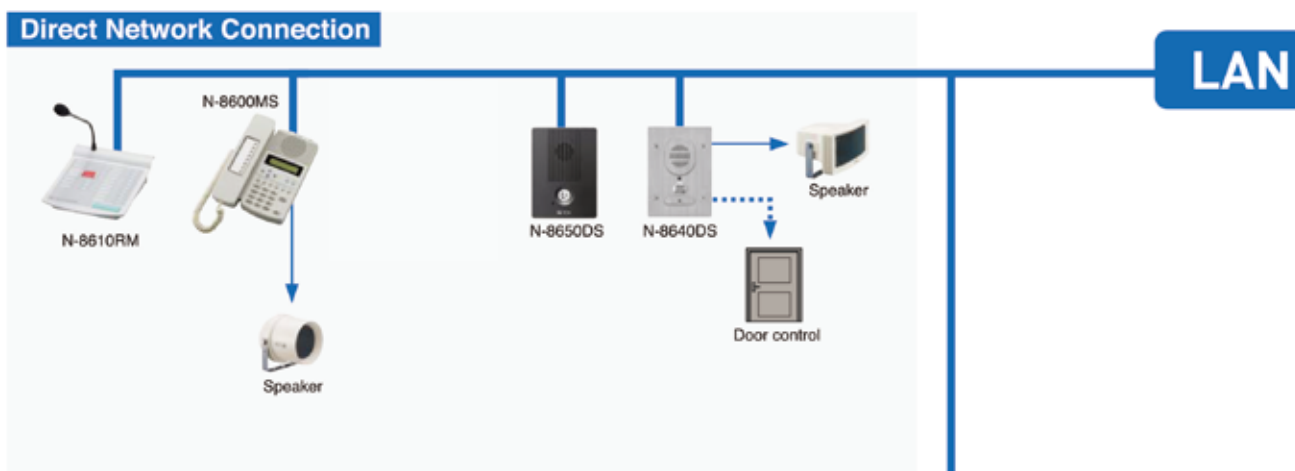

## 2-Wire Connection

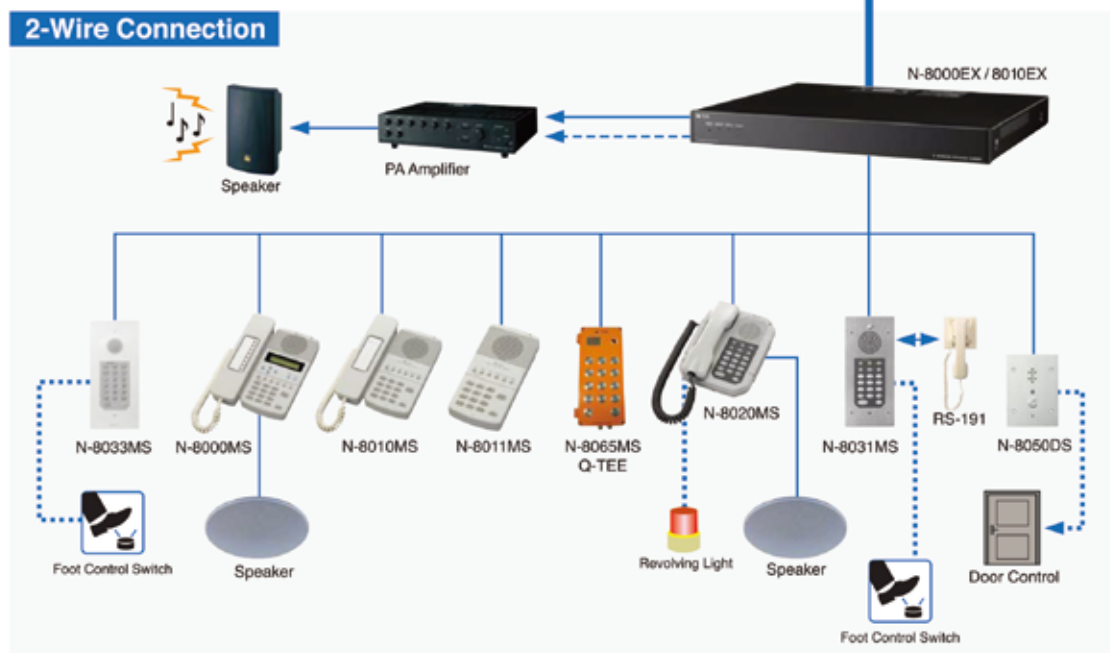

## System Specifications

### LAN Connections

Max. 192 units (total no. of Exchanges, Interface Units and IP stations)

### Station Connections

Max. 3,072 stations (16 stations connected to each of 192 Exchanges)

### Voice Links

Max. 768 links (4 links for each of 192 connected N-8000EX Exchanges)

### Paging

**Zones**  
Max. 192 zones

### Paging Outputs

Max. 384 outputs (2 outputs for each of 192 connected N-8000EX Exchanges or Multi-Interface units)

### BGM

Max. 8 channels (number of channels selectable from a station)

### PBX Interface

Max. 384 units (2 units for each of 192 connected Multi-Interface units)

### Tie-Line Interface

Max. 384 units (2 units for each of 192 connected Multi-Interface units)

### Outside-Line Interface

Max. 192 units

### Telephone Interface

Max. 192 units (when 192 Telephone Interface units are connected)

### External Contact Output

#### N-8000MI

Max. 3,072 (16 outputs for each of 192 connected Multi-Interface units)

#### N-8000DI

Max. 6,144 (32 outputs for each of 192 connected Direct Select units)

#### N-8000AF

Max. 1,536 (8 outputs for each of 192 connected Audio Interface units)

### External Contact Input

#### N-8000MI

Max. 3,072 (16 inputs for each of 192 connected Multi-Interface units)

#### N-8000DI

Max. 6,144 (32 inputs for each of 192 connected Direct Select units)

#### N-8000AF

Max. 1,536 (8 inputs for each of 192 connected Audio Interface units)

### [Network Relations]

#### Audio Delay Time

80 ms/320 ms; changeable


#### Connection Delay Time

Max. 1 second (when 191 multicast paging destinations are set)

#### Bandwidth Used

Max. 2.08 Mbps (one-way)/unicast paging to 16 locations  
Max. 130 Kbps (two-way)/per call

# WAN

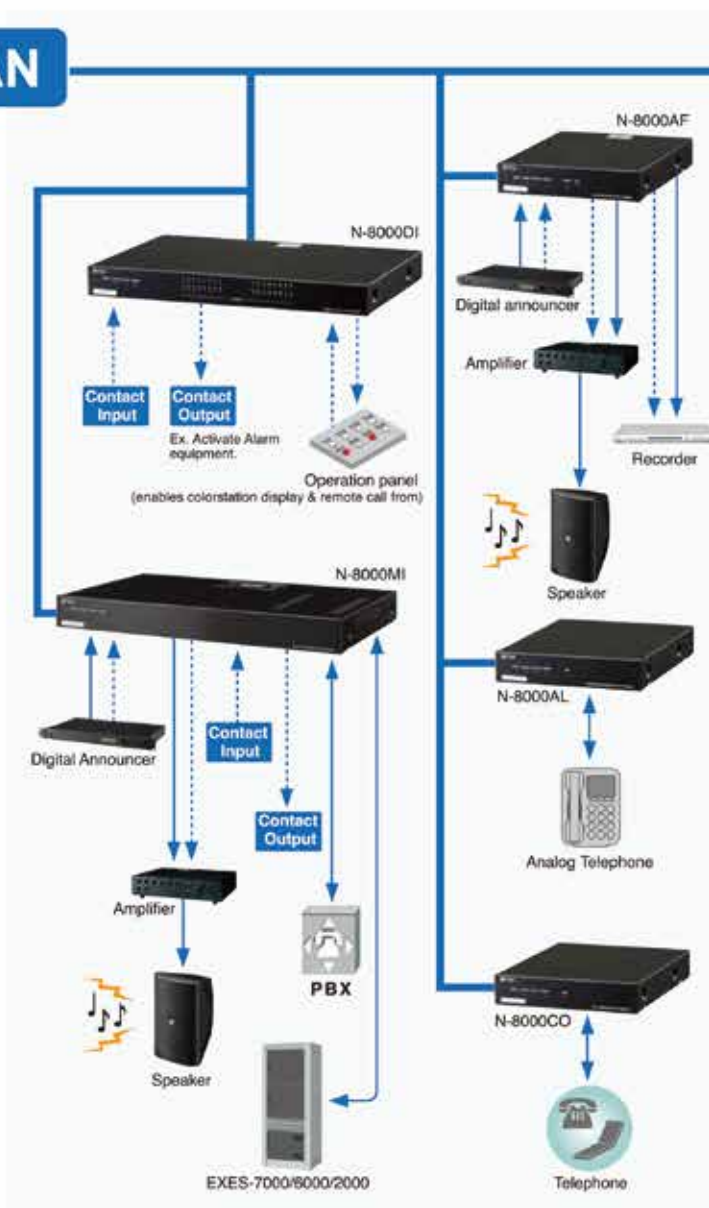


## Permits the creation of a wide variety of system configurations through the free combination of individual interface units

- PBX Connection • Office line connection
- Tie-line connection • BGM
- External equipment control
- Remote door control • Conversation recording
- External input broadcast • Paging
- Paging interlock contact output control
- Call station indicator • CCTV interlock
- Remote dialing • Direct select
- Contact bridge • System diagnosis
- Time signal • Time correction


## A variety of convenient functions

- Voice calling
- Hands-free conversation
- Automatic connection
- Continuous call
- One-touch dialing
- Call hold
- Automatic call forwarding
- Busy call
- Emergency call interruption
- Paging call
- Emergency all-group paging
- Emergency message broadcasts
- Paging response
- Scan monitor
- Three-party conference
- Door remote
- Emergency paging
- Audio trigger

## 4-Wire Connection

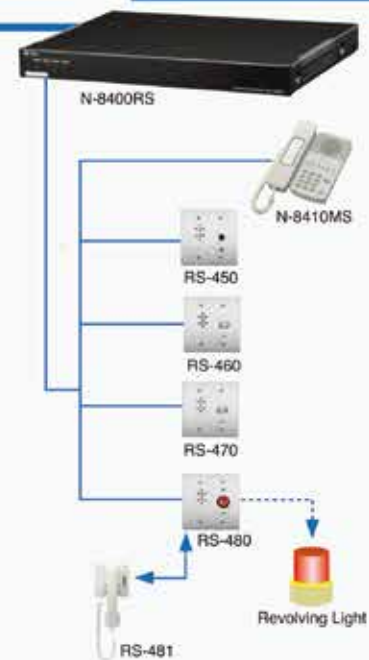

## 2-Core Shielded Wire Connection

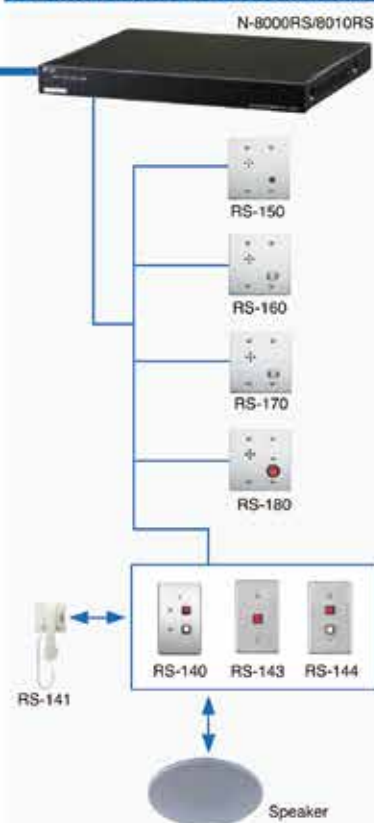

# Amplifiers

## Digital Power Amplifiers

### Multi-Channel Digital Power Amplifiers

#### »» 4-Channel Power Amplifier

### DA-500FH / DA-550F / DA-250FH / DA-250F



\* 0dB = 0.775V

Model	DA-500FH	DA-550F	DA-250FH	DA-250F
Power Source	220 – 240V AC, 50/60Hz			
Amplification System	Class D			
Power Consumption	460W (based on EN standards) 2350W (rated output 100V line 20Ω x 4)	480W (based on EN standards) 2750W (rated output 4Ω x 4) 1550W (rated output 8Ωx 4)	200W (based on EN standards) 1150W (rated output 100V line, 40Ω x 4)	200W (based on EN standards) 1200W (rated output 4Ω x 4) 800W (rated output 8Ω x 4)
Input	4 circuits, +4dB* (1.23V, input level control in max. position), 10kΩ, electronically-balanced, removable terminal block (3 pins), XLR-3-31 type connector CH 1 mode ON/ OFF switch (ON: CH 1 to All ch, OFF: Each ch)		4 circuits, +4dB* (1.23V, input level control in max. position), 10kΩ, electronically-balanced, removable terminal block (3 pins), CH 1 mode ON/ OFF switch (ON: CH 1 to All ch, OFF: Each ch)	
Rated Output	4 channels: 500W x 4 (100V line, 20Ω) M4 screw terminal, distance between barriers: 8.8 mm	4 channels: 550W x 4 (4Ω), 350W x 4 (8Ω) 2 channels (BRIDGE): 1,100W x 2 (8Ω) M4 screw terminal, distance between barriers: 8.8mm	4 channels: 250W x 4 100V line, 40Ω) M4 screw terminal, distance between barriers: 8.8mm	4 channels: 250W x 4 (4Ω), 170W x 4 (8Ω) 2 channels (BRIDGE): 500W x 2 (8Ω) M4 screw terminal, distance between barriers: 8.8mm
Frequency Response	50Hz – 20kHz (–3dB, +1dB)	20Hz – 20kHz (–2dB, +1dB)	50Hz – 20kHz (–3dB, +1dB)	20Hz – 20kHz (±1dB)
Total Harmonic Distortion	0.1% (1kHz) 0.3% (100Hz – 20kHz)	0.1% (1kHz) 0.15% (20Hz – 20kHz)	0.1% (1kHz), 0.3% (100Hz - 20kHz)	
Protection Circuit	Protection against excessive current flow due to overload, short circuit, unusual DC voltage output, temperature rise at power amp. heat sink (100°C or more), temperature rise at power supply heat sink (80°C or more)		Protection against excessive current flow due to overload, short circuit, unusual DC voltage output, temperature rise at power amp. heat sink (100°C or more), temperature rise inside the unit (80°C or more)	
S/N Ratio	100dB (A-weighted)			
Crosstalk	70dB (A-weighted)			
Control/ Monitor				
Control Input	Power ON/ OFF status of the individual channels Photocoupler input, drive voltage: 9V DC (Min.) – 14V (Max.), 12V (Typ)		-	
Monitor Output	Power ON/ OFF status of the individual channels, Protection status of the individual channels, Fan operation status photocoupler open collector output, withstand voltage: 30V DC, control current: under 12mA or less		-	
Connector	RJ45 connector x 2		-	
Connection Cable	Shielded Category 5 twisted pair cable for LAN (CAT5-STP)		-	
Max. Cable Distance	600m		-	
LED Indicator	Power (blue) x 1, Input (green) x 4, Output (yellow) x 4, Peak (red) x 4, Protect (red) x 4			
Cooling	Forced air cooling			
Operating Temperature	–10°C to +40°C			
Operating Humidity	90% RH or less (no condensation)			
Finish	Panel: Aluminum, black, alumite Case: Plated steel sheet			
Dimensions	482 (W) x 88.4 (H) x 404.2 (D) mm		482 (W) x 44 (H) x 401.8 (D) mm	
Weight	9kg		6.8kg	
Accessory	Power cord (2m) x 1, removable terminal plug (3 pins) x 4, Rack mounting screw (with washer) x 4, Tamper-proof cap x 4		Power cord (2m) x 1, removable terminal plug (3 pins) x 4, Rack mounting screw (with plain washer) x 4, Tamper-proof cap x 4	
Option	Matching transformer: MT-251H	-	Matching transformer: MT-251H	-



# >>> Dual-Channel Power Amplifier DA-250DH / DA-250D



\* 0dB = 0.775V

Model	DA-250DH	DA-250D
Power Source	220 – 240V AC, 50/ 60Hz	
Amplification System	Class D	
Power Consumption	120W (EN standards) 580W (rated output 100 V line, 40Ω x 2)	120W (EN standards) 620W (rated output 4Ω x 2) 400W (rated output 8Ω x 2)
Input	2 circuits, +4dB* (1.23V, input level control in maximum position), 10kΩ, electronically-balanced, removable terminal block (3 pins), XLR-3-31 type connector CH 1 mode ON/ OFF switch (ON: PARALLEL, OFF: STEREO)	
Rated Output	2 channels: 250W x 2 (100V line, 40Ω), M4 screw terminal, distance between barriers: 8.8mm	2 channels: 250 W x 2 (4Ω), 170 W x 2 (8Ω) 1 channel (BRIDGE): 500 W x 1 (8Ω), M4 screw terminal, distance between barriers: 8.8 mm
Frequency Response	50Hz – 20kHz (–3dB, +1dB)	20Hz – 20kHz (±1dB)
Total Harmonic Distortion	0.1% (1kHz), 0.3% (100Hz – 20kHz)	0.1% (1kHz), 0.3% (20Hz – 20kHz)
Protection Circuit	Protection against excessive current flow due to overload, short circuit, unusual DC voltage output, temperature rise at power amp. heat sink (100°C or more), temperature rise inside the unit (80°C or more)	
S/N Ratio	100dB (A-weighted)	
Crosstalk	70dB (A-weighted)	
LED Indicator	Power (blue) x 1, Input (green) x 2, Output (yellow) x 2, Peak (red) x 2, Protect (red) x 2	
Cooling	Forced air cooling	
Operating Temperature	–10°C to +40°C	
Operating Humidity	90% RH or less (no condensation)	
Finish	Panel: Aluminum, black, alumite Case: Plated steel sheet	
Dimensions	482 (W) x 44 (H) x 401.8 (D) mm	
Weight	5.3kg	
Accessory	Power cord (2m) x 1, removable Terminal plug (3 pins) x 2, Tamper+proof cap x 2, Rack mounting screw (with plain washer) x 4	
Option	Matching transformer: MT-251H	

# >>> Matching Transformer for DA-500FH, DA-250FH and DA-250DH MT-251H



**Capacity:** 0 – 250W  
**Primary Side:** 100V line, 70V line  
**Secondary Side:** 100V line, 70V line, 50V line, 35V line  
**Frequency Response:** 30Hz – 18kHz (+0dB, –3dB)  
**Connection Terminal:** M3 screw terminal, distance between barriers: 6.6mm  
**Dimensions:** 108 (W) x 80 (H) x 122 (D) mm  
**Weight:** 2.4kg

# Mixer Power Amplifiers

## A-2000 Series

### »» Digital Mixer Power Amplifier

**A-2030D-EA** 30W      **A-2120D-EA** 120W  
**A-2060D-EA** 60W      **A-2240D-EA** 240W



\*0dB = 1V

Model	A-2030D-EA	A-2060D-EA	A-2120D-EA	A-2240D-EA
<b>Power Source</b>	220 ~ 240V ~ 50/60Hz			
<b>Rated Output</b>	30W	60W	120W	240W
<b>Power Consumption</b>	12W (EN60065) AC operation at 1/8 maximum output without clip	16W (EN60065) AC operation at 1/8 maximum output without clip	30W (EN60065) AC operation at 1/8 maximum output without clip	48W (EN60065) AC operation at 1/8 maximum output without clip
<b>Frequency Response</b>	50Hz ~ 20kHz			
<b>Distortion</b>	1% or less (1kHz), 1/3 rated power			
<b>Input</b>	MIC 1-3: -60dB*, 600Ω, balanced, phone jack AUX 1, 2: -20dB*, 10kΩ, unbalanced, RCA pin jack			
<b>Output</b> Speaker out High impedance Rec. out	Balanced (floating) 330Ω (100V) 0dB*, 600Ω, unbalanced, RCA pin jack	Balanced (floating) 170Ω (100V) 0dB*, 600Ω, unbalanced, RCA pin jack	Balanced (floating) 83Ω (100V) 0dB*, 600Ω, unbalanced, RCA pin jack	Balanced (floating) 42Ω (100V) 0dB*, 600Ω, unbalanced, RCA pin jack
<b>Phantom Power</b>	DC + 21V (MIC 1)			
<b>S/N Ratio</b>	60dB or more			
<b>Tone Control</b>	Bass: ±10dB at 100Hz, Treble: ±10dB at 10kHz			
<b>Muting</b>	MIC 1: Mutes other input signals by 0 ~ 30dB attenuation			
<b>Indicator</b>	Power LED, Signal LED, Peak LED			
<b>Finish</b>	Panel: ABS resin, black, Case: Steel plate, black			
<b>Dimensions</b>	420 (W) × 100.6 (H) × 280.3 (D) mm			
<b>Weight</b>	4kg	4.6kg	4kg	4kg

### »» Mixer Power Amplifier

**A-2030** 30W      **A-2120** 120W  
**A-2060** 60W      **A-2240** 240W



Model	A-2030	A-2060	A-2120	A-2240
<b>Power Source</b>	220 ~ 240V AC (CE-AU / H) / 110 - 120V AC (L) or 24V DC (CE-AU) / 24-30V DC (H / L)			
<b>Rated Output</b>	30W	60W	120W	240W
<b>Power Consumption</b>	34W (EN60065) 78W (AC operation) 2A (DC operation)	72W (EN60065) 150W (AC operation) 4A (DC operation)	124W (EN60065) 260W (AC operation) 8A (DC operation)	238W (EN60065) 520W (AC operation) 15A (DC operation)
<b>Frequency Response</b>	50Hz ~ 20kHz (±3dB)			
<b>Distortion</b>	1% or less (1kHz), 1/3 rated power			
<b>Input</b>	MIC 1-3: -60dB*, 600Ω, electronically balanced, XLR3-31 type AUX 1, 2: -20dB*, 10kΩ, unbalanced, RCA pin jack Mute: Contact Pin 4-6 Closure input (for MIC 1)			
<b>Output</b> Speaker out  High impedance Low impedance Rec. out	Balanced (floating), M3.5 screw terminal, distance between barriers: 8.3mm, 330Ω (100V), 170Ω (70V), 4Ω (11V) 0dB*, 600Ω, unbalanced, RCA pin jack	Balanced (floating), M3.5 screw terminal, distance between barriers: 8.3mm, 170Ω (100V), 83Ω (70V), 4Ω (15.5V) 0dB*, 600Ω, unbalanced, RCA pin jack	Balanced (floating), M3.5 screw terminal, distance between barriers: 8.3mm, 83Ω (100V), 42Ω (70V), 4Ω (22V) 0dB*, 600Ω, unbalanced, RCA pin jack	Balanced (floating), M3.5 screw terminal, distance between barriers: 8.3mm, 42Ω (100V), 21Ω (70V), 4Ω (31V) 0dB*, 600Ω, unbalanced, RCA pin jack
<b>Phantom Power</b>	DC + 21V (MIC 1)			
<b>S/N Ratio</b>	60dB or more			
<b>Ventilation</b>	-	-	-	Fan cooling
<b>Tone Control</b>	Bass: ±10dB at 100Hz, Treble: ±10dB at 10kHz			
<b>Muting</b>	MIC 1: Mutes other input signals by 0 ~ 30dB attenuation			
<b>Indicator</b>	Power, signal, peak			
<b>Finish</b>	Panel: ABS resin, black, Case: Steel plate, black			
<b>Dimensions</b>	420 (W) × 100.9 (H) × 280.3 (D) mm		420 (W) × 100.9 (H) × 360.3 (D) mm	
<b>Weight</b>	5kg	7kg	10.8kg	13.2kg

\*0dB = 1V

Note: For CE-AU version: M3.5 screw terminal, distance between barrier: 8.3mm

## »»» Booster Amplifier

# P-2240

240W



Model	P-2240
Power Source	220 – 240V AC or 24 - 30V DC
Rated Output	240W
Power Consumption	238W (EN60065) 520W (AC operation at rated output) 15A (DC operation at rated output)
Frequency Response	50Hz – 20 kHz (±3dB)
Distortion	1% or less at 1kHz, 1/3 rated power
Input	Line in: 0dB*, 10kΩ, balanced, screw terminal, distance between barriers: 8.3mm 100V line in: 40dB*, 330kΩ Speaker line in: 40dB*, 330kΩ, unbalanced, screw terminal, distance between barriers: 8.3mm Power remote control: Make contact

Output	Loop out: 0dB*, 10kΩ, balanced, screw terminal, distance between barriers: 8.3mm Speaker out: Balanced (floating) 42Ω (100V), 21Ω (70V) (High impedance) 4Ω (31V) (Low impedance)
S/N Ratio	60dB or more
Ventilation	Fan cooling
Tone Control	Bass: ±10dB at 100Hz, Treble: ±10dB at 10kHz
Indicator	Power, signal, peak
Finish	Panel: ABS resin, black, Case: Steel plate, black
Dimensions	420 (W) × 100.9 (H) × 351.3 (D) mm
Weight	13.2kg

\*0dB = 1V

## A-3200D Series

### »»» Digital Mixer Amplifiers

# A-3212DMZ-EA4

120W

# A-3224DMZ-EA4

240W

# A-3248DMZ-EA4

480W



Model	A-3212DMZ-EA4	A-3224DMZ-EA4	A-3248DMZ-EA4
Power Source	100 – 240 V AC, 50/60 Hz		
Rated Output	120W	240W	480W
Power Consumption (EN60065)	44W	62W	99W
Frequency Response	(AC operation at 1/8 maximum output without clip) 50 Hz – 20 kHz		
Total Harmonic Distortion	Under 1 % at 1 kHz, 1/3 rated power		
Input	MIC 1: 1 mV (-60 dB*), 600 Ω, Balanced, phone jack, selectable to RJ45 MIC 2 - 3: 1 mV (-60 dB*), 600 Ω, Balanced, phone jack MIC 4: 1 mV (-60 dB*), 600 Ω, Balanced, phone jack, selectable to AUX 1 AUX 1: 100 mV (-20 dB*), 10 kΩ, Unbalanced, RCA pin jack, selectable to MIC 4 AUX 2: 100 mV (-20 dB*), 10 kΩ, Unbalanced, RCA pin jack MP3: LED Display, Support USB, SD/MMC card (up to 32GB), Bluetooth, Radio FM, Record		
Output			
Speaker Out:		Speaker output in screw type terminal	
Direct Line (Selectable):	83 Ω (100 V) or 4 Ω	42 Ω (100 V) or 4 Ω	21 Ω (100 V) or 4 Ω
Rec Out:	0 dB*, 600 Ω, Unbalanced, RCA pin jack		
Zone Selection	5 zone selector (all zones simultaneously selectable)		
Phantom Power	DC +21 V (MIC 1)		
S/N ratio	Over 60 dB		
Tone Control	Bass: ±10 dB at 100 Hz / Treble: ±10 dB at 10 kHz		
Muting	MIC 1: Mutes other input signals by 0 – 30 dB attenuation		
Ventilation	Natural Air Cooling	Fan Cooling	
Finish	Panel: ABS resin, Black / Case: Steel Plate, Black		
Dimensions (W x H x D)	420 x 100.9 x 357 mm		

### »»» Digital Booster Amplifier

# P-3248D-EA4

480W



Model	P-3248D-EA4
Power Source	100 – 240 V AC, 50/60 Hz
Rated Output	480 W
Power Consumption (EN60065)	99 W (AC operation at 1/8 maximum output without clip)
Frequency Response	50 Hz – 20 kHz
Total Harmonic Distortion	Under 1 % at 1 kHz, 1/3 rated power
Input	Line In: 0 dB*, 10 kΩ, Balanced, Screw Terminal / 100 V Line In: 40 dB*, 330 kΩ, Unbalanced, Screw Terminal
Output	Speaker out: Direct Line (Selectable): Loop out:

Control	Remote power control, screw terminal / Master through volume, screw terminal
S/N ratio	Over 60 dB
Tone Control	Bass: ±10 dB at 100 Hz / Treble: ±10 dB at 10 kHz
Ventilation	Fan Cooling
Finish	Panel: ABS resin, Black / Case: Steel Plate, Black
Dimensions (W x H x D)	420 × 100.9 × 351.3 mm
Weight	5 kg

## A-3500D Series

### »» Digital Mixer Amplifiers

**A-3512D**

120W

**A-3524D**

240W

**A-3548D**

480W



Model	A-3512D	A-3524D	A-3548D
<b>Power Source</b>	100 – 240 V AC, 50/60 Hz		
<b>Rated Output</b>	120W	240W	480W
<b>Power Consumption</b>	171W (rated output), 48W (based on EN62368)	314W (rated output), 70W (based on EN62368)	601W (rated output), 113W (based on EN62368)
<b>Current Consumption</b>	200 mA or less (when power switch is OFF)		
<b>Frequency Response</b>	50 Hz – 20 kHz $\pm$ 3 dB (1/8 rated output)		
<b>Distortion</b>	1% or less at 1 kHz, rated power (20 kHz LPF (AUX-0025))		
<b>Tone Control</b>	Bass: $\pm$ 10 dB at 100 Hz / Treble: $\pm$ 10 dB at 10 kHz		
<b>Signal to Noise Ratio</b>	88 dB or more (Master volume: min) 76 dB or more (Master volume: max) 55 dB or more (INPUT 1 to 4) 72 dB or more (INPUT 5) (A-weighted)		
<b>Audio Input</b>			
INUT 1, 2	-60 dB*(MIC) / -20 dB* (line), selectable, 600 $\Omega$ , electronically-balanced, removable terminal block (3.81 mm, 5 pins) / $\varnothing$ 6.3mm phone jack (2P) Note: MIC inputs are equipped with phantom power (24 V DC, ON/OFF switchable).		
INPUT 3	-60 dB*, 600 $\Omega$ , electronically-balanced, $\varnothing$ 6.3 mm phone jack (2P)		
INPUT 4	-60 dB* (MIC)/-20 dB* (LINE) selectable, 600 $\Omega$ , electronically-balanced, $\varnothing$ 6.3 mm phone jack (2P)		
INPUT 5	-20 dB*, 10 k $\Omega$ , unbalanced, RCA pin jack x 2		
Power Amplifier Input	0 dB*, 600 $\Omega$ , unbalanced, RCA pin jack		
<b>Audio Output</b>			
SPEAKER OUT	Low impedance (4 to 16 $\Omega$ )/ High impedance (DIRECT, ZONE 1/ZONE 2: 100 V/total 83 $\Omega$ ) (ZONE 1/ZONE 2 is selectable, Max. 120 W per output)	Low impedance (4 to 16 $\Omega$ )/ High impedance (DIRECT, ZONE 1/ZONE 2: 100 V/total 42 $\Omega$ ) (ZONE 1/ZONE 2 is selectable, Max. 240 W per output)	Low impedance (4 to 16 $\Omega$ )/ High impedance (DIRECT, ZONE 1/ZONE 2: 100 V/total 21 $\Omega$ ) (ZONE 1/ZONE 2 is selectable, Max. 480 W per output)
REC OUT	Removable terminal block (5.00 mm, 6 pins) 0 dB *, 600 $\Omega$ , unbalanced, RCA pin jack		
LINE OUT 1, 2	0 dB *, 600 $\Omega$ , unbalanced, RCA pin jack LINE OUT 1, 2 0 dB *, 600 $\Omega$ , unbalanced, RCA pin jack		
<b>Control Input</b>			
CONTROL IN	2 channels, no-voltage make contact input, open voltage: 35 V DC or less, short-circuit current: 10 mA or less, removable terminal block (3.81 mm, 5 pins)		
ZONE CONTROL IN	No-voltage make contact input, open voltage : 35 V DC or less, short-circuit current:10 mA or less, removable terminal block (3.81 mm, 4 pins)		
<b>Control Output</b>			
POWER REMOTE OUT	Open collector output, withstand voltage: 30 V DC or less, control current: 25 mA or less, removable terminal block (3.50 mm, 4 pins)		
EMERGENCY OUT	Open collector output, withstand voltage: 30 V DC or less, control current: 25 mA or less, removable terminal block (3.50 mm, 4 pins)		
ZONE CONTROL OUT	Open collector output (polarized), withstand voltage: 30 V DC or less, control current: 25 mA or less, removable terminal block (3.81 mm, 4 pins)		
<b>Indicators</b>	5-point LED level meter, Power indicator, Priority broadcast indicator, Emergency broadcast indicator, Thermal protection indicator, Over-current protection indicator, and Zone indicator (1, 2)		
<b>Operating Temperature</b>	-10 to +40 °C (14 to 104 °F)		
<b>Operating Humidity</b>	85 % RH or less (no condensation)		
<b>Finish</b>	Panel: ABS resin, black Case: Surface-treated steel plate, black, paint		
<b>Dimensions (W x H x D)</b>	420 (W) x 96.1 (H) x 313.1 (D) mm or 16.54" x 3.78" x 12.33"		
<b>Weight</b>	4.9 kg (10.08 lb)		5.1 kg (11.24 lb)
<b>Accessories</b>	Power cord (2m (6.56 ft)) -----1 Audio input removable terminal plug (3.81 mm, 5 pins) -----2 Control I/O removable terminal plug (3.81 mm, 4 pins) -----2 Remote control removable terminal plug (3.50 mm, 4 pins) ----1 Speaker out removable terminal plug (5.00 mm, 6 pins) -----1 Volume control cover -----4		
<b>Optional Products</b>	Rack mounting bracket: MB-25B, Perforated panel: PF-013B		

\*0dB = 1V

## A-3600D Series

### »» Digital Mixer Amplifier

**A-3606D** 60W

**A-3612D** 120W

**A-3624D** 240W

**A-3648D** 480W



\*0dB = 1V

Model	A-3606D	A-3612D	A-3624D	A-3648D
<b>Power Source</b>	100 – 240V AC, 50/60Hz			
<b>Rated Output</b>	60W	120W	240W	480W
<b>Power Consumption</b>	96 W (rated output), 40 W (based on EN62368)	171 W (rated output), 48 W (based on EN62368)	314 W (rated output), 70 W (based on EN62368)	601 W (rated output), 113 W (based on EN62368)
<b>Current Consumption</b>	200 mA or less (when power switch is OFF)			
<b>Frequency Response</b>	50 Hz to 20 kHz $\pm 3$ dB (1/8 rated output)			
<b>Distortion</b>	1 % or less at 1 kHz, rated power (20 kHz LPF (AUX-0025))			
<b>Tone Control</b>	Bass: $\pm 10$ dB at 100 Hz / Treble: $\pm 10$ dB at 10 kHz			
<b>Signal to Noise Ratio</b>	88 dB or more (Master volume: min) 76 dB or more (Master volume: max) 55 dB or more (INPUT 1 to 6) 72 dB or more (INPUT 7) (A-weighted)			
<b>Audio Input</b>				
INPUT 1, 2	-60 dB* (MIC)/-20 dB* (LINE) selectable, 600 $\Omega$ , electronically-balanced, removable terminal block (3.81 mm, 3 pins) Note: MIC inputs are equipped with phantom power (24 V DC, ON/OFF switchable).			
INPUT 3, 4	-60 dB*, 600 $\Omega$ , electronically-balanced, removable terminal block (3.81 mm, 3 pins) Note: Equipped with phantom power (24 V DC, ON/OFF switchable).			
INPUT 5, 6	MIC (BUS 1)/LINE (BUS 2) selectable MIC: -60 dB*, 600 $\Omega$ , electronically-balanced, removable terminal block (3.81 mm, 3 pins) LINE: -20 dB*, 10 k $\Omega$ , unbalanced, RCA pin jack x 2			
INPUT 7	-20 dB*, 10 k $\Omega$ , unbalanced, RCA pin jack x 2			
Power Amplifier Input	0 dB*, 600 $\Omega$ , unbalanced, RCA pin jack			
<b>Input Bus</b>				
INPUT 1 to 4	BUS 1			
INPUT 5, 6	BUS 1/ BUS 2 selectable			
INPUT 7	BUS 2			
<b>Audio Output</b>				
SPEAKER OUT	Low impedance (8 to 16 $\Omega$ )/ High impedance (DIRECT, ZONE 1/ZONE 2: 100 V/total 170 $\Omega$ ) (ZONE 1/ZONE 2 is selectable, Max. 60 W per output)	Low impedance (4 to 16 $\Omega$ )/ High impedance (DIRECT, ZONE 1/ZONE 2: 100 V/total 83 $\Omega$ ) (ZONE 1/ZONE 2 is selectable, Max. 120 W per output)	Low impedance (4 to 16 $\Omega$ )/ High impedance (DIRECT, ZONE 1/ZONE 2: 100 V/total 42 $\Omega$ ) (ZONE 1/ZONE 2 is selectable, Max. 240 W per output)	Low impedance (4 to 16 $\Omega$ )/ High impedance (DIRECT, ZONE 1/ZONE 2: 100 V/total 21 $\Omega$ ) (ZONE 1/ZONE 2 is selectable, Max. 480 W per output)
	Removable terminal block (5.00 mm, 6 pins)			
REC OUT	0 dB*, 600 $\Omega$ , unbalanced, RCA pin jack			
LINE OUT 1, 2	0 dB*, 600 $\Omega$ , unbalanced, RCA pin jack (Interlock with zone selection is possible.)			
<b>Control Input</b>				
CONTROL IN	4 channels, no-voltage make contact input, open voltage: 35 V DC or less, short-circuit current: 10 mA or less, removable terminal block (3.81 mm, 4 pins)			
REMOTE VOLUME	Removable terminal block (3.50 mm, 4 pins)			
ZONE CONTROL IN	No-voltage make contact input, open voltage : 35 V DC or less, short-circuit current:10 mA or less, removable terminal block (3.81 mm, 4 pins)			
<b>Control Output</b>				
POWER REMOTE OUT	Open collector output, withstand voltage: 30 V DC or less, control current: 25 mA or less, removable terminal block (3.50 mm, 4 pins)			
EMERGENCY OUT	Open collector output, withstand voltage: 30 V DC or less, control current: 25 mA or less, removable terminal block (3.50 mm, 4 pins)			
ZONE CONTROL OUT	Open collector output (polarized), withstand voltage: 30 V DC or less, control current: 25 mA or less, removable terminal block (3.81 mm, 4 pins)			
<b>Chime</b>	1-note, 2-note, or ascending 4-note chime or None selectable with switch setting			
<b>Indicators</b>	LED level meter, Power indicator, Network connection confirmation indicator, Priority broadcast indicator, Emergency broadcast indicator, Thermal protection indicator, Over-current protection indicator, CPU running indicator, Error indicator, and Zone indicator			
<b>Operating Temperature</b>	-10 to +40 °C (14 to 104 °F)			
<b>Operating Humidity</b>	85 % RH or less (no condensation)			
<b>Finish</b>	Panel: ABS resin, black Case: Surface-treated steel plate, black, paint			
<b>Dimensions (W x H x D)</b>	420 (W) x 96.1 (H) x 313.1 (D) mm or 16.54" x 3.78" x 12.33"			
<b>Weight</b>	5 kg (11.02 lb)			5.2 kg (11.46 lb)

\*0dB = 1V



## »» Matrix Amplifier

### MA-725F-EB 4 x 250W



## »» Remote Control Panel

### WP-700-EB



**Applicable Cable:** CAT 5 / 5e / 6 STP cable

**Control Operation:** Input select switch x 1, Volume control knob x 1

**Terminal:** RJ 45 connector

**Finish:** Surface treated steel plate, white paint (RAL 9016)

**Dimensions:** 72 (W) x 128 (H) x 56.6 (D) mm

**Weight:** 188g

Model	MA-725F
Power Source	100 - 240V AC, 50/60Hz
Power Consumption	1350 W (rated output)
Frequency Response	20Hz - 20 kHz (-3 dB / ±1 dB, LPF OFF)
Total Harmonic Distortion	1% or less, at 1kHz, rated output
Certifications	cULus 60065, EN60065, EN55032, EN55020, FCC part15 class A
Input	Priority Input: PRIORITY 1-2: Mic -60dB/Line -10dB selectable, 2.2k Ω, electronically-balanced, removable terminal block; AUDIO input: LINE 1-4: -10dB, 10k Ω, unbalanced, 2 RCA jacks (Stereo summing)
Rated Output Power	250W x 4 channel: 70V line (20 Ω) / 100V line(40 Ω)
Output	Speaker output: CH 1-4: 70V (20 Ω), 100V (40 Ω), removable terminal block; Line output: CH 1-4: 0dB*, 600 Ω, unbalanced, RCA jack; MOH output: 0dB*, 600 Ω, transformer balanced, removable terminal block
DSP Preset	16 presets in 4 banks at each output channel, selectable
S/N Ratio	Mic: 60 dB or more, Line: 75dB or more (A-weighted)
Muting	Manual mute / Automatic mute
Mute Hold Time	50ms - 10 seconds, adjustable
Priority Level	PRIORITY 1 > PRIORITY 2 > LINE 1-4
Control	POWER: ON/OFF switch, Power remote terminal; PRIORITY 1-2: MIC/LINE selector switch, Gain Control, Assign Switch, Mute sense control, Manual mute terminal, Mute hold time control, Priority mix switch; Line In 1-4: Gain Control, Assign restriction switch; OUTPUT 1-4: Line in 1-4 Selector switch, Output gain control, 70V/100V selector switch, HPF switch, DSP bank selector switch, DSP preset selector switch Remote 1-4: Remoted control connector (RJ45), Remote link switch
Operating Temperature	0°C - 40°C (32 - 104 °F)
Operating Humidity	35% to 80%RH (no condensation)
Finish	Panel: Aluminum, hairline, black; Case: Steel plate, black, paint
Dimensions	420(W) x 107.6(H) x 350(D) mm (16.54" x 4.24" x 13.78")
Weight	7.6kg (16.7 lbs)
Accessories	Power cord (2m) x 1, Removable connectors (5P x 2pcs, 2P x 4pcs); Rack mount bracket x 2pcs, Screws x 4pcs, User Manual x 1
Option	Wall panel : WP-700

\*0dB = 1V

## Mobile Amplifiers

## »» Mobile Amplifier

### CA-115 CA-130 CA-160



Model	CA-115	CA-130	CA-160
Power Source	Standard voltage : 14V DC Operating range : 10 - 16V DC (12V battery used)		
Power Consumption	3A or less (rated output)	5A or less (rated output)	9A or less (rated output)
Rated Output	15W (35W max.)	30W (60W max.)	60W (120W max.)
Output Impedance	4Ω (BRN), 8Ω (ORG), Common (WHT) Changeable by changing lead wire connections		
Distortion	5% or less (1kHz rated output)		
Frequency Response	100Hz - 10kHz		
Input	Mic 1, 2 : 600Ω, 4mV, Phone jack Aux : 10kΩ, 500mV, Phone jack		
Finish	Front panel : ABS resin, black Case : Zinc plated steel sheet		
Dimensions	178 (W) x 50 (H) x 132 (D) mm (Mounting device excluded)	178 (W) x 50 (H) x 144 (D) mm (Mounting device excluded)	178 (W) x 50 (H) x 170 (D) mm (Mounting device excluded)
Weight	0.9kg	1.1kg	1.2kg
Accessory	Microphone holder x 1, Mounting bracket x 1, Mounting screw x 1, Fuse (4A) x 1, Connection cord x 1 set	Microphone holder x 1, Mounting bracket x 1, Mounting screw x 1, Fuse (8A) x 1, Connection cord x 1 set	Microphone holder x 1, Mounting bracket x 1, Mounting screw x 1, Fuse (12A) x 1, Connection cord x 1 set
Accessory Microphone	Uni-directional dynamic microphone with talk switch, Impedance : 600Ω, Sensitivity : - 53dB (1kHz, 0dB = 1V/ Pa)		

»» Wireless Meeting Amplifier

# WA-1830MB-AS



\* 0dB = 1V

Model	WA-1830MB-AS
Power Source	230 V AC, 50/60Hz; DC: 12V/2.3 Ah (Rechargeable Battery included)
Power Consumption	AC: 55 W (rated output)
Rated Output	AC: 30 W (40W max. including external speaker output); DC: 10 W
Applicable Tuner Unit	WTU-4800 (Optional)
Battery Life	Approx. 5 hours continuous music
Battery Charging Time	12 hours, 12V/2.3 Ah x 1 pcs Lead Acid Battery
Frequency Response	50 Hz - 15 kHz, ±3 dB
Distortion	Under 5 % (rated output)
Input	Wired mic: -45 dB*, 600Ω, Unbalanced, 6.3 mm phone jack External Input: -15 dB*, 10kΩ, Unbalanced, RCA jack
Output	External speaker: 8 - 16Ω / over 20 W of rated input External Output: 0 dB*, 1 kΩ, Unbalanced, 6.3 mm phone jack
Other Features	Internal speaker ON/OFF switch: Enables or Disables the internal speaker
S/N Ratio	Over 60 dB (Rated output)
Antenna	Internal antenna (PCB Antenna)
Internal Speaker	2-way speaker system: 20cm full-range speaker and tweeter
MP3 Player	Extension Type file is: MP3, WMA, WAV, AAC, FLAC Max. supported storage size of the medium (stick): 32 GB (FAT16/FAT32) Source: USB, SD/MMC, FM, AUX REC Signal from input can be recorded to SD/USB in MP3 file format We do not guarantee that it supports all kinds of USB/SD
Operating Temperature	-10 °C to +50 °C
Finish	ABS Resin, Black
Dimensions	298 (W) x 460 (H) x 200 (D) mm
Weight	6.2 kg
Accessories	Power Cord (YA-301) x 1, Dust Cover x 1, Remote x 1, Screw Driver x 1, Remote Controller x 1

# Mixers

## Analog Mixer

### » Mixer

## MX-113-EB



\*0dB = 1V

Model	MX-113-EB
Power Source	19-33V DC
Current Consumption	0.2 A
Input	MIC 1-5: 600 Ω, -62 dB*, unbalanced, phone jack (voice switch OFF) ; 600 Ω, -54 dB*, unbalanced, phone jack (voice switch ON) (optional IT-450 balance transformer) MIC 6: 600 Ω, -62 dB*, unbalanced, phone jack AUX 1: 10 kΩ, -12 dB*, unbalanced, phone jack/RCA jack (Microphone 6 and AUX 1 are switch type) AUX 2, 3: 10 kΩ, -12 dB*, unbalanced, phone jack/RCA jack AUX 4: 600 Ω, -12 dB*, unbalanced, phone jack (optional IT-450 balance transformer)

Output	Line output 1: 600 Ω, 0 dB*, balanced, phone jack Record out : 1 kΩ, 0 dB*, unbalanced, RCA jack
Remote Terminal	Withstand voltage: DC 30V, Current: 1A, M3 Screw terminal, 6.4mm
T.H.D	1 % or less (1 kHz, rated output)
Frequency Response	30 Hz - 20 kHz
S/N Ratio	60 dB
Finish	Front Panel: Aluminium, Black, Paint
Dimensions	420 (W) x 50 (H) x 271 (D) mm
Weight	3.2 kg
Accessory	Power Cable (2 pin)
Option	Rack Mount Bracket: MB-15B, Balance Transformer: IT-450

## 9000 Series Digital Matrix Mixer

### » 9000M2 Digital Matrix Mixer

## M-9000M2



Model	M-9000M2
Power Source	220 - 240V AC, 50/ 60Hz
Power Consumption	40W
Audio Input	Max. 8 channels, modular construction (modules optional)
Audio Output	Preamplifier output 1, 2: 0dB <sup>*1</sup> , 600Ω, balanced, removable terminal block (3 pins)
Module Slot	Analog input (slot 1 - 8) : -10dB <sup>*1</sup> , 10kΩ, unbalance Digital input (slot 1 - 4) : 24 bit/ 48kHz MIX output (slot 1 - 8) : -14dB <sup>*1</sup> , 330Ω (CH1 prefader output), unbalanced Digital output (slot 5 - 7) : 24 bit/ 48kHz Power supply (slot 1 - 8) : +24V, -24V, +6V DC
Digital Audio Signal Reference Level	-20dB FS
Frequency Response	20Hz - 20kHz, +1, -3dB
Total Harmonic Distortion	0.008% (at 22kHz LPF, 1kHz, +10dB <sup>*1</sup> output)
S/N Ratio	At Input short, 20Hz - 20kHz, ALL FLAT or OFF setting Output volume min. : 90dB Output volume max. : 61dB (input 1 volume: 0dB, other inputs: OFF)
Cross Talk	64dB or more (at 20kHz)
Tone Control	Bass: ±12dB (at 100Hz), Treble: ±12dB (at 10kHz)
Parametric Equalizer	10 bands, Frequency: 20Hz - 20kHz, 31 points, Variable range: ±12dB, Q: 0.3 - 5
Speaker Equalizer	10 (setup software has 30 TOA speaker presets)
High-/ Low-pass Filter	-12dB/ oct, Variable frequency range: 20Hz - 20kHz, 31 points
Compressor	Depth: 1 - 5

Delay	0 - 40ms (1 ms steps), max. 40ms (CH1 + CH2), mixer mode only
Scene Memory	32
Auxiliary Function	Key lock function
Control Input/ Output	RS-232C <sup>*2</sup> , D-sub connector (9P, female) Control input : 4 inputs, no-voltage make contact input, open voltage: 3.3V DC, short-circuit current: 1mA or less, removable terminal block (14 pins) Control output : 4 outputs, open collector output, withstand voltage: 27V DC, control current: 50mA, removable terminal block (14 pins) Remote volume : 2 channels, connect a 10kΩ/ linear taper variable resistor or input the DC voltage of 0 to +10V, removable terminal block (14 pins)
Operating Temperature	-10°C to +40°C
Operating Humidity	35% to 80% RH (no condensation)
Finish	Panel: Aluminum, hair-line, black Case: Surface-treated steel plate, black, paint
Dimensions	420 (W) x 107.6 (H) x 353 (D) mm
Weight	6kg
Accessory	Power cord (2m) x1, Rack mounting bracket x2, Bracket Mounting screw x4, Black panel x7, Blank panel mounting screw x14, Removable terminal plug (3P) x2, Removable terminal plug (14P) x1, CD x1

\*1 0dB = 1V

\*2 Allowing it to be controlled by a control system such as AMX and Crestron through RS-232C port.

Note: AMX is a trademark of AMX Corporation. Crestron is a trademark of Crestron Electronics, Inc.

## 9000 Series Modules and Optional Accessories

### » Ambient Noise Control Module

## AN-001T



\* 0dB = 1V

Model	AN-001T
Power Source	+24V DC, -24V DC, +6V DC
Current Consumption	20mA (at +24V DC), 20mA (at -24V DC), 60mA (at +6V DC)
Input	Sensor input (Ambient noise sensor microphone input): 2 channels, 3kΩ (when phantom power is ON) or 10kΩ (when phantom power is OFF), electronically-balanced, removable terminal block (3 pins)
Input Sensitivity	-60, -54, -48, -42, -36, -30, -24, -18, -10 dB* (selectable)
A/D Converter	24 bit ΔΣADC
Sampling Frequency	48kHz

Ambient Noise Control Function	Sensor input reference level adjustment function Max. output signal level control: -15 to 0dB Min. output signal level control: -18 to -3dB Sample time setting: 10s, 15s, 20s, 30s, 1min, 2min, 3min, 5min Gain ratio setting (Ambient noise to Output signal level): 6:3, 5:3, 4:3, 3:3, 3:4, 3:5, 3:6, 6:-3, 5:-3, 4:-3, 3:-3, 3:-4, 3:-5, 3:-6
Operating Temperature	-10°C to +40°C
Finish	Panel: Aluminum, hair-line
Dimensions	35 (W) x 78 (H) x 91.5 (D) mm
Weight	82g
Accessory	Removable terminal plug (3 pins) x 2, module mounting screw x 2
Option	Ceiling mount microphone: AN-9001

## »» Input/Output Control Module

## C-001T



Model	C-001T
Power Source	6V DC
Current Consumption	15mA
Control Input	8 channels, open voltage: 3.3V DC, short-circuit: under 1mA, removable terminal block (9 pins)
Control Output	8 channels, open collector output, withstand voltage: 27V DC, control current: max. 50mA, removable terminal block (9 pins)

Operating Temperature	-10°C to +40°C
Finish	Panel: Aluminum, hair-line
Dimensions	35 (W) x 78 (H) x 91.5 (D) mm
Weight	62g
Accessory	Removable terminal plug (9 pins) x 2, Module mounting screw x 2

## »» Line Input Module

## D-001R



Model	D-001R
Power Source	+24V DC, -24V DC, +6V DC
Current Consumption	20mA (at +24V DC), 20mA (at -24V DC), 60mA (at +6V DC)
Input	2 channels, 2 RCA jacks/ ch mixed, 10kΩ, unbalanced, RCA pin jack
Input Sensitivity	-60, -54, -48, -42, -36, -30, -24, -18, -10dB* (selectable)
Frequency Response	20Hz - 20kHz +1, -3dB
Total Harmonic Distortion + N	0.008% (at 1kHz, 20Hz - 20kHz BPF, Input sensitivity: -10dB)
S/N Ratio	Over 70dB (at 20Hz - 20kHz BPF, Input short, Input sensitivity: -10dB)
Cross Talk	Over 75dB (at 20kHz, Input sensitivity: -10dB)
A/D Converter	24 bit $\Delta\Sigma$ ADC

\* 0dB = 1V

Sampling Frequency	48kHz
Tone Control	Bass: $\pm 12$ dB (at 100Hz) Treble: $\pm 12$ dB (at 10kHz)
Parametric Equalizer	10 bands, Frequency: 20Hz - 20kHz, 31 points, Variable range: $\pm 12$ dB, Q: 0.3 - 5
High-/ Low-pass Filter	-12dB/oct, Variable frequency range: 20Hz - 20kHz, 31 points
Compressor	Depth: 1 - 5
Operating Temperature	-10°C to +40°C
Finish	Panel: Aluminum, hair-line
Dimensions	35 (W) x 78 (H) x 91.5 (D) mm
Weight	82g
Accessory	Module mounting screw x 2

## »» Dual Mic/Line Input Module with DSP

## D-001T



Model	D-001T
Power Source	+24V DC, -24V DC, +6V DC
Current Consumption	20mA (at +24V DC), 20mA (at -24V DC), 60mA (at +6V DC)
Input	2 channels, 3kΩ (when phantom power is ON) or 10kΩ (when phantom power is OFF), electronically-balanced, removable terminal block (3 pins)
Input Sensitivity	-60, -54, -48, -42, -36, -30, -24, -18, -10dB* (selectable)
Frequency Response	20Hz - 20kHz +1, -3dB
Total Harmonic Distortion + N	0.008% (at 1kHz, 20Hz - 20kHz BPF, Input sensitivity: -10dB)
Input Equivalent Noise	-112dB or less (at 20Hz - 20kHz BPF, Input short, Input sensitivity: -60dB)
S/N Ratio	73dB or more (at 20Hz - 20kHz BPF, Input short, Input sensitivity: -10dB)
Cross Talk	75dB or more (at 20kHz, Input sensitivity: -10dB)

\* 0dB = 1V

CMRR	62dB or more (at 1kHz, Input sensitivity: -60dB)
A/D Converter	24bit $\Delta\Sigma$ ADC
Sampling Frequency	48kHz
Tone Control	Bass: $\pm 12$ dB (at 100Hz) Treble: $\pm 12$ dB (at 10kHz)
Parametric Equalizer	10 bands, Frequency: 20Hz - 20kHz, 31 points, Variable range: $\pm 12$ dB, Q: 0.3 - 5
High-/ Low-pass Filter	-12dB/oct, Variable frequency range: 20Hz - 20kHz, 31 points
Compressor	Depth: 1 - 5
Phantom Power	+24V DC
Operating Temperature	-10°C to +40°C
Finish	Panel: Aluminum, hair-line
Dimensions	35 (W) x 78 (H) x 91.5 (D) mm
Weight	82g
Accessory	Removable terminal plug (3pins) x2, Module mounting screw x2

## »» Dual Line Output Expansion Module with DSP

## T-001T



Model	T-001T
Power Source	+24V DC, -24V DC, +6V DC
Current Consumption	35mA (at +24V DC), 35mA (at -24V DC), 60mA (at +6V DC)
Output	2 channels, max. +20dB* (at 10kΩ load), 600Ω, electronically-balanced, removable terminal block (3 pins)
Frequency Response	20Hz - 20kHz +1, -3dB
Total Harmonic Distortion + N	0.005% (at 1kHz, 20Hz - 20kHz BPF, 5V output, 10kΩ load)
S/N Ratio	73dB or more (at 20Hz - 20kHz BPF)
Residual Noise	-91dB or less (at 20Hz - 20kHz BPF, VOL: -70dB)
Cross Talk	87dB or more (at 20kHz)
D/A Converter	24 bit $\Delta\Sigma$ DAC
Sampling Frequency	48kHz

\* 0dB = 1V

Tone Control	Bass: $\pm 12$ dB (at 100Hz) Treble: $\pm 12$ dB (at 10kHz)
Parametric Equalizer	10 bands, Frequency: 20Hz - 20kHz, 31 points, Variable range: $\pm 12$ dB, Q: 0.3 - 5
Speaker Equalizer	10 (setup software has 30 TOA speaker presets.)
High-/ Low-pass Filter	-12dB/oct, Variable frequency range: 20Hz - 20kHz, 31 points
Compressor	Depth: 1 - 5
Delay	0 - 40ms (1ms step), max. 40ms (CH1 + CH2), mixer mode only
Operating Temperature	-10°C to +40°C
Finish	Panel: Aluminum, hair-line
Dimensions	35 (W) x 78 (H) x 91.5 (D) mm
Weight	82g
Accessory	Removable terminal plug (3 pins) x 2, Module mounting screw x 2

» Remote Control Module

RC-001T



Model	RC-001T
Power Source	6V DC
Current Consumption	30mA or less
Terminal	Removable terminal block (10 pins)
Power Input	24V DC input x 2 (Applicable AC adapter: optional AD-246, power supply to Remote Controllers) Adaptable DC plug: 9.5 (L) x 5.5 (OD) x 2.1 (ID) mm
Connection Cable	Shielded CPEV cable (paired data line and paired power line) or Category 5 twisted pair cable for LAN (CAT5-STP)

Operating Temperature	−10°C to +40°C
Operating Humidity	35% to 80% RH (no condensation)
Max. Cable Distance	800m in total
Connectable No. of Remote Control Panels	Max. 16 units (2 link connectors used)
Finish	Panel: aluminum, hair-line
Dimensions	35 (W) x 78 (H) x 91.5 (D) mm
Weight	80g
Accessory	Module mounting screw x 2, Removable terminal plug (10 pins) x 1

» Telephone Zone Paging Module

ZP-001T



Model	ZP-001T
Power Source	+24V DC, +6V DC
Current Consumption	38mA (at +24V DC), 18mA (at +6V DC)
No. of Lines	1 line
Type of Selectable Signal	DTMF signal
Signaling System	Loop-Start (or Ground-Start, selectable)
TEL Line	0dB, 600Ω, balanced, transformer-isolated, RJ-11 connector, loop voltage: 24V DC or more, which should be supplied from the PABX.
Paging Input	0dB, 600Ω, balanced, transformer-isolated audio input, removable terminal block (4 pins)

Control Input	1 channel, no-voltage make contact, open voltage: 5V DC, short-circuit: 0.5mA, removable terminal block (4 pins)
Control Output	4 channels, open collector output (isolated), withstand voltage: 35V DC, control current: max. 50mA, removable terminal block (4 pins)
Operating Temperature	−10°C to +40°C
Finish	Panel: Aluminum, hair-line
Dimensions	35 (W) x 78 (H) x 91.5 (D) mm
Weight	153g
Accessory	Removable terminal plug (4 pins) x 3, Module mounting screw x 2

» Remote Panel

ZM-9001

ZM-9002



Model	ZM-9001	ZM-9002
Applicable Cable	Single conductor shielded cable	
Line Resistance	50Ω or less (per line)	
Terminal	M3 screw terminal, distance between barriers: 7.62mm	
Operating Section	6 control buttons	4 control buttons, 1 volume control
Operating Temperature	−10°C to +40°C	
Finish	Surface-treated steel plate, white, paint	
Dimensions	72 (W) x 127 (H) x 45 (D) mm	72 (W) x 127 (H) x 56 (D) mm
Weight	170 g	
Accessory	Machine screw: No. 6-32UNC x 30 (for box mounting) x 2, M4 x 30 (for box mounting) x 2, No. 6-32UNC x 6 (for panel mounting) x 2	

» Remote Panel

ZM-9011

ZM-9012

ZM-9013

ZM-9014



Model	ZM-9011	ZM-9012	ZM-9013	ZM-9014
Power Source	24V DC (supplied from RC-001T)			
Current Consumption	50mA or less			
Terminal	Removable terminal block (10 pins)			
Connection Cable	Shielded CPEV cable (paired data line and paired power line) or Category 5 twisted pair cable for LAN (CAT5-STP)			
Operating Section	4 control buttons	1 volume control	8 control buttons	4 control buttons 1 volume control
Indicator	4 function indicators (green LEDs),	Set volume level indicators (green LEDs)	8 function indicators (green LEDs)	4 in-use indicators (green LEDs) Set volume level indicators (green LEDs)
Operating Temperature	0°C to +40°C			
Operating Humidity	35% to 80% RH (no condensation)			
Finish	Surface-treated steel panel, white, paint			
Dimensions	72 (W) x 127 (H) x 49.5 (D) mm	72 (W) x 127 (H) x 57.5 (D) mm	120 (W) x 127 (H) x 50.5 (D) mm	120 (W) x 127 (H) x 58.5 (D) mm
Weight	208g		374g	
Accessory	Box Mounting screw(No. 6-32UNC x 30) x 2, Box mounting screw(M4 x 30) x 2, Panel Mounting screw x 2, Removable terminal plug (10 pins) x 1		Box Mounting screw(No. 6-32UNC x 30) x 4, Box mounting screw(M4 x 30) x 4, Panel Mounting screw x 4, Removable terminal plug (10 pins) x 1	



## » Speaker Selector

## SS-9001



Model	SS-9001
Power Source	Supplied from the optional AD-246 AC adapter or an external 24V DC/ 200mA power supply.
Current Consumption	120mA
Control Signal	No-voltage make contact input (polarized), open voltage: 24V DC, short-circuit current: 3mA
Control Power	240W or less (70V/ 100V line)
Speaker Terminal	Removable terminal block (2 pins)
Control Terminal	Removable terminal block (10 pins)

Operating Temperature	-10°C to +40°C
Finish	Case: Surface-treated steel plate
Dimensions	112 (W) x 197 (H) x 30 (D) mm
Weight	530g
Accessory	Removable terminal plug (2 pins) x 6, Removable terminal plug (10 pins) x 1, Cord clamp x 1, Mounting screw x 4
Option	AC adaptor: AD-246

## » Ambient Noise Sensing Microphone

## AN-9001



Model	AN-9001
Type	Electret condenser microphone
Phantom Power	14 – 26V DC
Current Consumption	7mA (at 24V DC)
Directivity	Omnidirectional (hemispherical)
Impedance	200Ω
Rated Sensitivity	-5dB (1kHz, 0dB = 1V/ Pa)
Frequency Response	100Hz – 10kHz
Output Terminal	Removable terminal block (3 pins)

Operating Temperature	-10°C to +40°C
Finish	Panel:ABS resin, white Case:Surface-treated steel plate
Dimensions	ø130 x 37 (D) mm
Weight	170g
Accessory	Removable terminal plug (3 pins) x 1, Box mounting screw (No. 6-32UNC x 30) x 2, Box mounting screw (M4 x 30) x 2
Option	9000 series plug-in module: AN-001T

## D-2000 Series Digital Mixing Systems

## » Digital Mixing Processor Unit

## D-2008SP



\* 0dB = 0.775V

Model	D-2008SP
Power Source	220 – 240V AC, 50/ 60Hz
Power Consumption	76W
Frequency Response	20Hz – 20kHz, ±1dB (±4dB* input)
Sampling Frequency	48kHz
Input/ Output	Input: Max. 32 channels, modular construction (modules optional) Output: Max. 32 channels, modular construction (modules optional) Monitor bus: 1 stereo input, 1 stereo output Connector: RJ45 connector Connection cable: Shielded Cat 5 or higher twisted pair LAN cable (CAT5-STP) Max. Cable Distance: 100m or 109.36 yd (between D-2008SP and D-2012C) Headphones: 1 stereo
Signal Processing	Feedback Suppression Function Auto Mixing Function Auto Mixing Group Equalizer/ Filter Compressor mode
	12 filters (auto + dynamic), Max. 4 bus channels Ducker (auto muting), NOM attenuation 4 groups Parametric equalizer: 20Hz – 20kHz, ±15dB, Q: 0.267 – 69.249 Filtering: High-/Low-pass filter: 20Hz – 20kHz, 6dB/ oct, 12dB/ oct Notch filter: 20Hz – 20kHz, Q: 8.651 – 69.249 All-pass filter: 20Hz – 20kHz, Q: 0.267 – 69.249 High shelving filter: 6Hz – 20kHz, ±15dB Low shelving filter: 20Hz – 500Hz, ±15dB Horn equalizer: 20kHz, 0dB to +18dB (0.5dB steps) Crossover filter: 20Hz – 20kHz, 6dB/ oct, 12dB/ oct, 18dB/ oct, 24dB/ oct Threshold: -20dB to +20dB (1dB steps) Ratio: 1:1, 1.1:1, 1.2:1, 1.3:1, 1.5:1, 1.7:1, 2:1, 2.3:1, 2.6:1, 3:1, 4:1, 5:1, 7:1, 8:1, 10:1, 12:1, 20:1, ∞:1 Attack time: 0.2ms – 5s, Release time: 10ms – 5s Gain: -∞ to +10dB Knee Type: Hard knee, Soft knee 1, Soft knee 2

Auto-Leveler Mode	Target Level: -20dB to +20dB (1dB steps) Max. Gain: 0dB to +20dB (1dB steps) Attack Time: 10ms – 10s, Release Time: 100ms – 10s Output Delay Time: 0ms – 1360ms (0.021ms steps) Bus Delay Time: 0ms – 677ms (0.021ms steps) Matrix: Input - Max. 34 (32 + 2) channels x 24 bus Output - Max. 44 (24 + 4 + 16) bus x 32 channels CobraNet Matrix: Input - Max. 16 channels x 24 bus Output - Max. 28 (24 + 4) bus x 16 channels Crosspoint Gain: -∞ to 0dB (1dB steps)
Preset Memory	32
Auxiliary Function	Key lock function
LAN	Network I/F: 10BASE-T/ 100BASE-TX (automatic recognition), connected via a switching hub Network Protocol: TCP/IP Connection Cable: Shielded Category 5 or higher twisted pair LAN cable (CAT5-STP) Max. Cable Distance: 100m (between D-2008SP and switching hub)
Control	RS-232C : D-sub connector (9 pins), for external control Module : Remote control module slot x 2
Operating Temperature	+5°C to +40°C
Finish	Panel : Aluminum, hair-line finish, black Case : Pre-coated steel plate
Dimensions	482 (W) x 132.6 (H) x 343.4 (D) mm
Weight	6.3kg
Accessory	Power cord (2m) x 1, Rack mounting screw x 4, Module mounting screw (spare) x 4, Blank panel (preinstalled on the module slot) x 8, CD (setup software) x 1
Option Modules	Mic/Line Input: D-2000AD1, D-921E, D-921F, D-922E, D-922F Stereo Select Input: D-936R Digital Input: D-923AE, D-937SP Line Output: D-971E, D-971M, D-971R Digital Output: D-961SP, D-972AE CobraNet Interface: D-2000CB Remote Control: D-981, D-983 VCA Control: D-984VC

## » Remote Console Unit

# D-2012C



\* 0dB = 0.775V

Model	D-2012C
<b>Power Source</b>	220 – 240V AC, 50/ 60Hz
<b>Power Consumption</b>	18W
<b>Volume Adjustment</b>	100mm motorized fader x 12, rotary encoder x 8
<b>Line Input</b>	1 channel (stereo), +10dB* to –20dB*, 10kΩ, unbalanced, RCA jack
<b>Headphone output</b>	Stereo, 100mW + 100mW (at 32Ω load), standard stereo phone jack
<b>Monitor Bus</b>	1 stereo input, 1 stereo output Connector: RJ45 connector Connector Cable: Shielded twisted pair (STP) Cat 5 or higher LAN cable (data lines: 2 pairs) Max. Cable: 100m (between D-2012C and D-2008SP)
<b>LAN</b>	Network I/F: 10BASE-TX (Automatic-Negotiation) RJ45 connector, connected via a switching hub Network Protocol: TCP/ IP

	Connection Cable: Shielded twisted pair (STP) Category 5 or higher LAN cable Max. Cable Distance: 100m (between D-2012C and switching hub)
<b>Control</b>	RS-232C: D-sub connector (9 pins), for maintenance use
<b>Operating Temperature</b>	+5°C to +40°C
<b>Finish</b>	Panel: Surface treated steel sheet, laminated with polycarbonate sheet, gray, matte Rack Mount Bracket: Surface treated steel plate, gray, matte
<b>Dimensions</b>	482 (W) x 266 (H) x 138 (D) mm
<b>Weight</b>	6.6kg
<b>Accessory</b>	Power cord (2m) x1, Rack mounting screw x4, Fader knob (yellow) x3, Fader knob (red) x3, Cord clamp (fitting screw) x1
<b>Option</b>	Console Case: D-2012AS

## » Console Case for D-2012C

# D-2012AS



**Finish:** Side panel: MDF, paint, black, matte  
Armrest: MDF, synthetic-leather, black, matte  
Decorative panel: Stainless steel, silver

**Dimensions:** 505 (W) x 127.5 (H) x 333.3 (D) mm (assembled with the D-2012C)

**Weight:** 2.3kg or 7.5kg (assembled)

**Accessory:** Assemble screw x 11, Rubber foot x 4, Rubber foot mounting screw x 4

## D-2000 Series Modules

## » Mic/Line Input Module

# D-2000AD1



Model	D-2000AD1
<b>Input</b>	4 channels, Mic/ Line selectable (Selectable with the D-2000 Setting Software) Mic: –50/ –36dB*, 2.6kΩ, electronically-balanced Line: –10dB*, 2.6kΩ/ +4dB*, 7kΩ, electronically-balanced Connector: XLR-3-31 type Phantom power supply (48V DC, can be set for the Mic, 5mA or less per channel) Ground lift switch

\* 0dB = 0.775V

<b>A/D Converter</b>	24 bit
<b>Sampling Frequency</b>	48kHz
<b>Frequency Response</b>	20Hz – 20kHz, ±1dB (+4dB* input)
<b>Dynamic Range</b>	104dB (IHF-A weighted) or more (+4dB* input)
<b>Total Harmonic Distortion</b>	0.008 % or less (+4dB* input)
<b>Finish</b>	Panel: Pre-coated steel plate, black, 30% gloss
<b>Dimensions</b>	35 (W) x 119.5 (H) x 178.4 (D) mm
<b>Weight</b>	200g

## » Line Output Module

# D-2000DA1



Model	D-2000DA1
<b>Output</b>	4 channels, +4dB*/ –10dB* (Selectable with the DIP switch), adaptable load of over 600Ω, electronically-balanced / unbalanced (Selectable with the DIP switch), XLR-3-32 equivalent
<b>D/A Converter</b>	24 bit
<b>Sampling Frequency</b>	48kHz

\* 0dB = 0.775V

<b>Frequency Response</b>	20Hz – 20kHz, ±1dB
<b>Dynamic Range</b>	104dB or more (IHF-A weighted)
<b>Total Harmonic Distortion</b>	0.008 % or less
<b>Finish</b>	Panel: Pre-coated steel plate, black, 30 % gloss
<b>Dimensions</b>	35 (W) x 119.5 (H) x 178.4 (D) mm
<b>Weight</b>	200g

## » CobraNet Interface Module

# D-2000CB



Model	D-2000CB
<b>Network I/F</b>	CobraNet
<b>Connection Cable</b>	100 BASE-TX, PRIMARY/ SECONDARY 2 system, RJ45 connector, Enables decentralized installation, Audio transmission only. Shielded twisted pair (STP) Cat 5 or higher LAN cable. To be connected via the specified switching hub Note : This network should be completely independent of the LAN.
<b>No. of D-2008SP Connection</b>	Max. 4

<b>Switching Hub Stage</b>	Max. 7
<b>Max. Extend Distance</b>	100m (connected via a switching hub)
<b>Input/ Output</b>	16 channels, 20 bit/ 24 bit
<b>Sampling Frequency</b>	48kHz
<b>Finish</b>	Panel: Pre-coated steel plate
<b>Dimensions</b>	25.5 (W) x 82.5 (H) x 144 (D) mm (excluding projection)
<b>Weight</b>	100g

Note: CobraNet is a registered trademark of Circs Logic Corporation.

## D-901 Digital Mixer

### »» Digital Mixer

## D-901



\* 0dB = 0.775V

Model	D-901
Power Source	230V AC (315H/ CE) or 220 - 230V AC (CE-GB), 50/ 60Hz
Power Consumption	27W
Frequency Response	20Hz – 20kHz, ±1dB (+4dB* Input)
Input/ Output	Max. 12 channels (Input) / Max. 8 channels (output), modular construction (modules optional)
Signal Processing	
Feedback Suppression Function	12 filters (auto/ dynamic)
Auto Mixing Function	Ducker (automatic muting), NOM attenuation
Auto Mixing Group	4 groups
Equalizer/ Filter	Parametric equalizer: 20Hz – 20kHz, ±15dB, Q: 0.267 – 69.249 Filtering : High/low pass filter: 20Hz – 20kHz, 6dB/ oct, 12dB/ oct Notch filter: 20Hz – 20kHz, Q: 8.651 – 69.249 All-pass filter: 20Hz – 20kHz, Q: 0.267 – 69.249 High shelving filter: 6kHz – 20kHz, ±15dB Low shelving filter: 20Hz – 500Hz, ±15dB Horn equalizer: 20kHz, 0 to +18dB (1dB steps) Crossover filter: 20Hz – 20kHz, 6dB/oct, 12dB/ oct, 18dB/oct, 24dB/ oct
Compressor Mode	Threshold: –20dB to +20dB (1dB steps) Ratio: 1:1, 2:1, 3:1, 4:1, 8:1, 12:1, 20:1, ∞:1 Attack time: 0.2ms to 5s, Release time: 10ms to 5s Gain: –∞ to +10dB
Auto-Leveler Mode	Target Level: –20dB to +10dB (1dB steps) Max. Gain: 0dB to +20dB (1dB steps) Attack Time: 10ms – 10s, Release Time: 100ms – 10s


Delay	Delay Time: 0 – 682.6ms (0.021ms steps)
Matrix	12 x 8
Crosspoint Gain	–∞ to 0dB (1dB steps)
Preset Memory	16
Auxiliary Function	System Locking function
Control	RS-232C, D-sub connector (9 pins), Remote control module (option)
Front Panel Section	Preset Memory Recall Key: 8, LCD Screen, Screen shift key (up/ down/ left/ right), setting knob Input/ Output Level Indicator: Dual color LED Channel Selector Key: 12 (input), 8 (output) Channel Volume Selector Control: 1 (input), 1 (output)
Rear Panel	Input Module Slot: 6 (input/output module slot: 2) Output Module Slot: 2 Remote control module slot: 1
Operating Temperature	+5°C to +40°C
Finish	Panel: Aluminum, hair-line finish, black Others: Pre-coated steel plate, black, 30% gloss
Dimensions	482.6 (W) x 132.6 (H) x 343.1 (D) mm (excluding projection)
Weight	6.9kg
Accessory	Power cord (2m) x 1, Rack mounting screw x 4, Rack mounting bracket (preinstalled on the unit) x 2, Module mounting screw (spare) x 4, Blank panel (preinstalled on the module slot) x 9

Note: When installing the unit never block the intake vents provided in the unit's bottom near the rear.

## D-901 / D-2000 Series Modules and Optional Accessories

### »» VCA Fader Unit

## D-911



Model	D-911
Power Supply	5V DC (supplied from the optional D-984VC)
Connector	RJ45 connector x 8
Input Fader Control	Input fader (100mm) x 12
Output Volume Control	Output volume control x 8
Contact Control	Illuminated switch x 8
Remote Output	No-voltage make contact output (contact capacity: 30V DC, 4A)

Remote Switch	Seesaw switch for activating the remote function of the power distributor
Finish	Panel: Pre-coated steel plate, black, 30% gloss
Dimensions	482.6 (W) x 177 (H) x 61.3 (D) mm (excluding projection)
Weight	2.7kg
Accessory	Fader knob (Red, Yellow) x 3 each, Volume knob (Red) x 2, Rack mounting screw x 4, Rack mounting bracket (preinstalled on the unit) x 2

### »» VCA Control Module

## D-984VC



Model	D-984VC
VCA Control Input	+5V, GND, Terminal 1 – 20 (12 input channels, 8 output channels), RJ45 connector x 4 Control Contents: Volume control of each input/ output channel Variable Range: –∞dB to +0dB
Contact Input	COM + Terminal 1-8: Open voltage: 5V DC Short-circuit current: 5mA, RJ45 connector x 2
Control	
Preset Memory Selection	Any preset memory can be recalled. Control method: No-voltage make of over 100ms No-voltage make single pulse of over 100ms
Volume Control	Any input/ output channel volume can be turned UP or DOWN. Control Method: 1 step variation for no-voltage make single pulse of over 100ms. 1 step continuous operation for every 70ms for no- voltage make of over 100ms. Can be reset when at break.

Variable Range Channel	∞dB to +10dB Any input/ output channel can be turned ON and OFF. Control method: No-voltage make of over 100ms. No-voltage make single pulse of over 100ms
Stereo Selection	Input channel lines of the D-936R (optional) (4 stereo input module) can be selected. Control method: No-voltage make of over 100ms. No-voltage make single pulse of over 100ms
Contact Output	COM + Terminal 1-8: No-voltage make contact, contact capacity: 24V DC, 100mA, RJ45 connector x2
Finish	Panel: Pre-coated steel plate, black, 30% gloss
Dimensions	35 (W) x 119.5 (H) x 178.4 (D) mm
Weight	170g

## D-901 / DP-K1 / D-2000 Series Modules

### » Remote Control Module

#### D-981 / D-983



Model	D-981	D-983
<b>Contact input</b>	COM + terminals 1 – 8: Open voltage: 5V DC, short-circuit current: 5mA removable terminal block (10 pins)	COM + terminals 1 – 24: Open voltage: 5V DC, short-circuit current: 5mA, RJ45 connector x 4
<b>Control</b> Preset memory Selection Volume Control  Channel Stereo selection	Any preset memory can be recalled. Control method: No-voltage make of over 100ms /No-voltage make single pulse of over 100ms. Any input/ output channel volume can be turned UP or DOWN. Control Method: 1 step variation for no-voltage make single pulse of over 100ms, 1 step continuous operation for every 70ms for no-voltage make of over 100ms. Can be reset when at break. Variable Range: –∞dB to +10dB. Any input/output channels can be turned ON and OFF: Control method: No-voltage make of over 100ms / No-voltage make single pulse of over 100ms Optional input channel lines of D-936R (4 stereo input module) can be selected. Control method: No-voltage make of over 100ms / No-voltage make single pulse of over 100ms	
<b>Contact Output</b>	COM + terminals 1 – 8: No-voltage make contact input, contact capacity: 24V DC, 100mA removable terminal block (10 pins)	COM + terminals 1 – 16: No-voltage make contact, contact capacity: 24V DC, 100mA, RJ45 connector x 4
<b>Finish</b>	Panel: Pre-coated steel plate, black, 30% gloss	
<b>Dimensions</b>	35 (W) x 119.5 (H) x 178.4 (D) mm	
<b>Weight</b>	125g	170g
<b>Accessory</b>	Removable terminal plug (10 pins, preinstalled on the unit) x 2	-

### » Line Output Module

#### D-971M D-971R D-971E



\* 0dB = 0.775V

Model	D-971M	D-971R	D-971E
<b>Output</b>	4 channels, +4dB*, adaptable load of over 600Ω, electronically-balanced, equivalent to XLR-3-32 type	4channels (2outputs for each channel), -10dB*, adaptable load of over 600Ω, RCA pin jack	4channels, +4dB*, adaptable load of over 600Ω, electronically-balanced, removable terminal block(3P)
<b>D/A Converter</b>	24 bit		
<b>Frequency Response</b>	20Hz – 20kHz, ±1dB		
<b>Sampling Frequency</b>	48kHz		
<b>Dynamic range</b>	100dB or more (IHF-A weighted)		
<b>Total Harmonic Distortion</b>	0.05% or less		
<b>Finish</b>	Panel: Pre-coated steel plate, black, 30% gloss		
<b>Dimensions</b>	35 (W) x 119.5 (H) x 178.4 (D) mm		
<b>Weight</b>	165g	150g	140g
<b>Accessory</b>	-	-	Removable terminal plug (3 pins, preinstalled) x 4

### » Stereo Input Module

#### D-936R

\* 0dB = 0.775V



Model	D-936R
<b>Input</b>	When attached to D-901, D-2008SP or DP-K1: Stereo x 4 inputs (selection of 1 stereo or mixing or all 4 stereo inputs) –10dB*, 10Ω, RCA pin jack
<b>A/D Converter</b>	24 bit
<b>Frequency Response</b>	20Hz – 20kHz, ±1dB (+4dB* input)

<b>Sampling Frequency</b>	48kHz
<b>Dynamic range</b>	100dB or more (IHF-A weighted)
<b>Total Harmonic Distortion</b>	0.05% or less
<b>Finish</b>	Panel: Pre-coated steel plate, black, 30% gloss
<b>Dimensions</b>	35 (W) x 119.5 (H) x 178.4 (D) mm
<b>Weight</b>	145g

### » Digital Input Module / Digital Output Module

#### D-923AE / D-972AE



Model	D-923AE	D-972AE
<b>Input</b>	2 channels, 2.0 – 7.0V (p-p), 110Ω, XLR-3-31 or equivalent	-
<b>Output</b>	-	4 channels, 5.0V (p-p), 110Ω, XLR-3-32 or equivalent x 2
<b>Applicable Format</b>	AES/ EBU (2 channel multiplexed)	
<b>Sampling Frequency</b>	32kHz – 48kHz	48kHz
<b>Finish</b>	Panel: Pre-coated steel plate, black, 30% gloss	
<b>Dimensions</b>	35 (W) x 119.5 (H) x 178.4 (D) mm	
<b>Weight</b>	130g	
<b>Accessory</b>	-	Ferrite clamp x 2

## »» Mic/Line Input Module [20 Bits Monaural Type]

### D-922F / D-922E

\* 0dB = 0.775V



Model	D-922F	D-922E
<b>Input</b>	2 channels, -50/-36/-10/+4dB* (Selectable with the DIP switch), 4.7kΩ, electronically-balanced, equivalent to XLR-3-31 type, Phantom power supply (can be set with DIP switch), 15V: D-901, DP-K1, D-2008SP (option), Ground lift switch (can be set with the DIP switch)	2 channels, -50/-36/-10/+4dB* (Selectable with the DIP switch), 4.7kΩ, electronically-balanced, removable terminal block (3 pins), Phantom power supply (can be set with the DIP switch), 15V: D-901, DP-K1, D-2008SP (option), Ground lift switch (can be set with the DIP switch)
<b>A/D Converter</b>	20 bit	
<b>Frequency Response</b>	20Hz - 20kHz, ±1dB (+4dB* input)	
<b>Sampling Frequency</b>	48kHz	
<b>Dynamic range</b>	85dB or more (IHF-A weighted) (+4dB* input)	
<b>Total Harmonic Distortion</b>	0.02% or less (+4dB* input)	
<b>Finish</b>	Panel: Pre-coated steel plate, black, 30% gloss	
<b>Dimensions</b>	35 (W) x 119.5 (H) x 178.4 (D) mm	
<b>Weight</b>	135g	125g
<b>Accessory</b>	-	Removable terminal plug (3 pins, preinstalled) x2

## »» Mic/Line Input Module [24 Bits Monaural Type]

### D-921F / D-921E

\* 0dB = 0.775V



Model	D-921F	D-921E
<b>Input</b>	2 channels, Mic/ Line changeable Mic: -50/-36dB*, 4.7kΩ, electronically-balanced, equivalent to XLR-3-31 type Line: -10/+4dB*, 10kΩ, electronically-balanced, equivalent to XLR-3-31 type Phantom power supply (can be used when set for the microphone) 15V: D-901, DP-K1, D-20085P (option) Ground lift switch	2 channels, Mic/ Line changeable Mic: -50/-36dB*, 4.7kΩ, electronically-balanced, removable terminal block (3 pins) Line: -10/+4dB*, 10kΩ, electronically-balanced, removable terminal block (3 pins) Phantom power supply (can be used when set for the microphone) 15V: D-901, DP-K1, D-20085P (option) Ground lift switch
<b>A/D Converter</b>	24 bit	
<b>Frequency Response</b>	20Hz - 20kHz, ±1dB (+4dB* input)	
<b>Sampling Frequency</b>	48kHz	
<b>Dynamic range</b>	100dB or more (IHF-A weighted) (+4dB* input)	
<b>Total Harmonic Distortion</b>	0.05% or less (+4dB* input)	
<b>Finish</b>	Panel: Pre-coated steel plate, black, 30% gloss	
<b>Dimensions</b>	35 (W) x 119.5 (H) x 178.4 (D) mm	
<b>Weight</b>	150g	140g
<b>Accessory</b>	-	Removable terminal plug (3 pins, preinstalled) x2

## Digital Stereo Mixers

### »» Digital Stereo Mixer

#### M-633D



\*0dB = 1V

Model	M-633D
<b>Power Source</b>	220 - 240V AC, 50/ 60Hz (CE/ CE-AU) or 120V AC, 60Hz (CU)
<b>Power Consumption</b>	14W (CE/ CE-AU) or 13W (CU)
<b>Frequency Response</b>	20Hz - 20kHz
<b>Sampling Frequency</b>	48kHz
<b>Dynamic range</b>	90dB or more (IHF-A weighted)
<b>Distortion</b>	0.03% or less, 1kHz, -10dB* input, 0dB* output (20Hz - 20kHz, BPF)
<b>Input</b>	6 monaural input channels (MONO IN 1 - 6), selectable independently from 3 types of inputs below for each channel LINE: -10dB*, 2.4kΩ, electronically balanced MIC: -46dB*, 2.4kΩ, electronically balanced PHANTOM: -46dB*, 2.4kΩ, supplies phantom power of +24V DC, 10 mA, electronically balanced Removable terminal block (3 pins), phone jack 3 stereo inputs (L, R) (STEREO IN 1 - 3), -10dB*/ 10kΩ, RCA jack (STEREO IN 1 - 3), Stereo mini jack (ST IN 1)
<b>Output</b>	2 monaural output channels (MONO OUT 1, 2) 0dB* (applicable load: 1kΩ or more), electronically balanced, removable terminal block (3 pins) 1 stereo output (L, R) channel (ST OUT L, R) 0dB* (applicable load: 1kΩ or more), electronically balanced, removable terminal block (3 pins) 1 stereo recording output (L, R) channel (REC OUT L, R) -10dB* (applicable load: 1kΩ or more), RCA jack
<b>Bus Line</b>	Monaural channel x 2, Stereo channel x 1
<b>AD/ DA Converter</b>	24 bit
<b>Signal Processing</b>	Automatic Resonance Control (ARC) Function Feedback Suppressor(FBS) Function Automatic Clipguard(ACG) Function Automatic Mute Function 3 output channels (each monaural output channel, stereo output L, R), independent settings of each channel, automatic creation of EQ curves (for sound field compensation) ARC measurement start switch x1, Function ON/ OFF check indicator x1 6 channels (each monaural input channel), independent settings for each channel, Function ON/ OFF switch x6, Function ON/ OFF check indicator x6 6 channels (each monaural input channel), independent settings for each channel Function ON/ OFF switch x 1
<b>Input/ Output Level Indicator</b>	2-color LED indicator: Green (for appropriate level) / red (for peak level)
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	90% RH or less (no condensation)
<b>Finish</b>	Panel: Aluminum, black, hairline Case: Precoated steel sheet, black, 30% gloss
<b>Dimensions</b>	420 (W) x 44 (H) x 341.3 (D) mm
<b>Weight</b>	4kg
<b>Accessory</b>	Power cord(2m) x1, removable terminal plug(3P) x10, rubber foot x4, rack mounting bracket x2, machine screw(M3x8) x6, rack mounting screw(5x12) x4



»» Digital Stereo Mixer

M-864D



\* 0dB = 0.775V

Model	M-864D
Power Source	220 – 240V AC, 50/ 60Hz (CE/ CE - GB) or 220 - 240V AC, 50Hz (CE - AU) or 100 - 120V AC, 60Hz (CU)
D/A Converter	30W
Frequency Response	20Hz – 20kHz, ±1dB
Sampling Frequency	48kHz
Dynamic range	100dB or more
Distortion	0.03% or less, 1kHz, +4dB* input/ output, 20Hz – 20kHz BPF
Crosstalk	–80dB or less, 1kHz
Input	<p>Monaural input, 8 channels, removable terminal block (3 P) Phantom power (+24V DC, 10mA, ON/ OFF switchable for each channel)</p> <p>Gain setting (settable for each channel) : PAD ON Gain min., +4dB* (max. +24dB*), 10 kΩ, electronically-balanced,</p> <p>Gain max., –14dB* (max. +6dB*), 10kΩ, electronically-balanced</p> <p>PAD OFF Gain min., –10dB* (max. +10dB*), 7kΩ, electronically-balanced,</p> <p>Gain max., –56dB* (max. –36dB*), 7kΩ, electronically-balanced</p> <p>Stereo Input (L, R), 7 channels (1-A, 1-B, 1-C, 2-A, 2-B, 2-C, front-mounted input)</p> <p>RCA jack (stereo mini jack provided on the front panel):–10dB* (max. +10dB*), 10kΩ,</p> <p>Trim gain for each individual channel: –∞ to 0dB (except front-mounted input)</p> <p>1-A (L), 1-B (L), and 1-C (L) are mixed after passing through each trim gain circuit (the same applies to R channel)</p> <p>2-A (L), 2-B (L), and 2-C (L) are mixed with front-mounted input after passing through each trim gain circuit (the same applies to R channel)</p>
Output	<p>4 channels, +4dB* (max. +24dB*), applicable load 600Ω or more, electronically-balanced, removable terminal block (3 pins)</p> <p>REC OUT (L, R): –10dB* (max. +10dB*), applicable load 1kΩ or more, RCA jack. Gain is adjustable.</p>
AD/ DA Converter	24 bit
Preset Memory	16
Signal Processing	<p>Automatic Resonance Control (ARC) Function: Automatic EQ curve creation by ARC, 4 channels (each output channel), settable independently on each channel, ARC measuring start switch x 1, ON/ OFF LED x 1</p> <p>Feedback Suppressor (FBS) Function: Feedback suppressor filter creation, 8 channels (each monaural input channel), settable independently on each channel, ON/ OFF switch x 8, ON/ OFF LED x 8</p> <p>Filter: 8 channels (each monaural input channel), settable independently on each channel, high-pass filter: 20Hz – 20kHz</p> <p>Tone Controller: BASS Low-shelving filter: 20 – 500Hz, ±15dB, MID parametric equalizer: 20Hz – 20kHz, ±15dB (Q: 0.267 – 69.249)</p> <p>TREBLE, high-shelving filter: 6 – 20kHz, ±15dB</p> <p>10 channels (each monaural input channel, each stereo mixing input channel), settable independently on each channel</p> <p>Equalizer: Parametric equalizer - 20Hz – 20kHz, ±15dB (Q: 0.267 – 69.249, 4 channels (each output channel))</p> <p>Matrix: 12 x 4</p> <p>Crosspoint Gain: –∞ to 0dB in 1dB steps</p> <p>Automatic Mute Function: Stereo input section matrix, independent control</p>
Function	<p>Input PAD (–16dB) control, low cut (cutoff frequency: 100Hz) control, analog output attenuator (–6dB, –12dB, –18dB, –24dB, –36dB, –42dB) control, front panel operation lock function, stereo summing function, function setting panel (3 rotary encoders)</p>
Front Panel Section	<p>Input Level Indication: 3-point LED, 12 channels (each monaural input channel, stereo 1L, 1R, 2L, 2R)</p> <p>Output Level Indication: 8-point LED, 4 channels (each output channel)</p> <p>Auto Resonance Control (ARC) Measurement: ARC measuring start switch x 1, ON/ OFF LED x 1</p> <p>Feedback Suppressor (FBS) Function: ON/ OFF switch x 8, ON/ OFF LED x 8</p> <p>Low Cut Filter: ON/ OFF switch x 8, ON/ OFF LED x 8</p> <p>Stereo Summing: ON/ OFF switch x 2, ON/ OFF LED x 2</p> <p>Tone Control: BASS, MID, TREBLE / Settable with control knobs, 10 channels (each monaural input channel, stereo 1L, 1R, 2L, 2R)</p> <p>Monaural Input, Analog Setting: Gain setting, PAD ON/ OFF, Phantom power ON/ OFF, Settable on the function setting panel, 8 channels (each monaural input channel)</p> <p>Stereo Input, Analog Setting: Trim setting, Settable on the function setting panel, 6 channels (1-A, 1-B, 1-C), (2-A, 2-B, 2-C)</p> <p>REC Out, Gain Setting: Gain setting, Settable on the function setting panel, 2 channels (REC OUT L, REC OUT R)</p> <p>Preset Memory Switching: Preset selection switch x 4, ON/ OFF LED x 4</p> <p>Front Panel Operation Lock: Operation lock switch x 1, ON/ OFF LED x 1</p> <p>Operation Status Indication: Operation status LED x 3</p> <p>Function Setting Panel: Rotary encoder x 3, 10-point position indication LED x 3, Function mode LED x 3,</p> <p>Analog Volume Fader: Input volume fader x 10, Output volume fader x 4, 2 faders linkable with supplied gang bar</p>
Control Section	<p>Contact Input: 8 channels, open voltage: 24V DC, short-circuit current: 5mA, removable terminal block (10 pins)</p> <p>Contact Output: 8 channels, no-voltage make contact, contact capacity: 24V DC/100mA, removable terminal block (10 pins)</p> <p>Remote Control Panel: 2 channels, Max. No. of units: 8 units per channel,</p> <p>24V DC input x 2, termination switch x 1, removable terminal block (10 pins)</p> <p>Max. total cable length (star wiring): 800m (total for 2 channels)</p> <p>Max. cable length (daisy chain wiring): 400m per channel</p> <p>(Note: In daisy chain wiring, the no. of units differs depending on the cable length. Star wiring and daisy chain wiring cannot be used together.)</p> <p>Type of cable: Shielded CPEV cable (a pair of data cable and a pair of power supply cable) or shielded Cat 5 twisted pair cable for LAN (CAT5-STP)</p>
Network	<p>Network I/F: 1 channel of 10BASE-T/ 100BASE-TX (auto-negotiation) RJ45 connector, connection via switching hub</p> <p>Network protocol: TCP/ IP</p> <p>Connection cable: Shielded Cat. 5 or higher twisted pair cable for LAN (Cat. 5-STP or better)</p> <p>Max. cable length: 100m (between M-864D and switching hub)</p>
Operating Temperature	0°C to +40°C
Operating Humidity	90% RH (no condensation)
Finish	Panel: Aluminum, hairline, black, Case: Surface-treated steel plate
Dimensions	482.6 (W) x 177.1 (H) x 157.2 (D) mm
Weight	5.1kg
Accessory	Power cord (2m) x 1, Removable terminal plug (3 pins) x 12, Large type removable terminal plug (10 pins) x 2, Small type removable terminal plug (10 pins) x 1, fader gang bar x 4, protective cover x 1, rack mounting screw x 4, CD-ROM (setup software) x 1
Option	<p>Remote control panel: ZM-9011/ 9012/ 9013/ 9014</p> <p>AC Adaptor: AD-246 (or equivalent, when removing the Remote Control Panel)</p>

# Signal Processing Equipment

## Integrated DSP and Control Systems

### »» Digital Audio Processor

#### DP-K1



\* 0dB = 0.775V

Model	DP-K1
Power Source	230V AC, 50/ 60Hz
Power Consumption	40W (450mA)
Frequency Response	20Hz – 20kHz, ±1dB (±4dB* input)
Input/Output	Max. 8 channels, modular construction (modules optional)
IO Configuration	2-IN/ 4-OUT, 2-IN/ 8-OUT, 4-IN/ 4-OUT, 4-IN/ 8-OUT, 6-IN/ 4-OUT, 6-IN/ 8-OUT, 8-IN/ 4-OUT, 8-IN/ 8-OUT
Signal Processing	
Automatic Resonance Control Function	Parametric equalizer: 20Hz – 20kHz, ±12dB, Q: 0.267 – 69.249
Level Control	–∞ to +12dB (0.5dB steps), with polarity selector
Equalizer/Filter	0.008% (at 22kHz LPF, 1 kHz, +10dB*1 output)
Parametric equalizer	20Hz – 20kHz, ±12dB, Q: 0.267 – 69.249
High/low pass filter	20Hz – 20kHz, 6dB/oct, 12dB/oct
Notch filter	20Hz – 20kHz, Q: 8.651 – 69.249
All-pass filter	20Hz – 20kHz, Q: 0.267 – 69.249
High shelving filter	6 – 20kHz, ±12dB
Low shelving filter	20 – 500Hz, ±12dB
Horn equalizer	20kHz, 0 to +18dB (0.5 dB steps)
Crossover filter	20Hz – 20kHz, 6dB/oct, 12dB/oct, 18dB/oct, 24dB/oct
Compressor	Threshold: –16 to +24dB* (1dB steps) Ratio: 1:1, 2:1, 3:1, 4:1, 8:1, 12:1, 20:1, ∞:1 Attack Time: 0.02 – 100ms, Release Time: 10ms – 5s
Noise Gate	Threshold: –∞ to –26dB* (1dB steps) Attack Time: 0.1 – 100ms, Release Time: 20ms – 5s
Delay	0 – 682.0ms (0.021ms steps)
Matrix	8 x 8 Level Control: –∞ to 0dB (1dB steps), with polarity selector

Preset Memory	8
Auxiliary Function	Key lock function
Setting Software	OS: Windows 2000/XP/Vista (32 bit), Windows 7 (32/64 bit) Control System: 10 BASE-T/100 BASE-TX, Auto-negotiation, RJ45 connector
Front Panel Section	Preset Knob: 1 Input Channel Indicator: Green LED Output Channel Indicator: Green LED
Module Slot (Rear Panel)	Input Module Slot: 4 Output Module Slot: 2 Remote Control Module slot: 1
Operating Temperature	+5°C to +40°C
Finish	Panel: Aluminum, hair-line finish, black Others: Pre-coated steel plate, black, 30% gloss
Dimensions	482.6 (W) x 132.6 (H) x 320 (D) mm (excluding projection)
Weight	7.4kg
Accessory	Power cord (2m) x 1, Rack mounting screw x 4, Rack mounting bracket (preinstalled) x 2, Blank panel (preinstalled) x 8, Module mounting screw (spare) x 4, CD (software) x 1
Option Modules	Mic/Line Input: D-921E, D921F, D-922E, D-922F Stereo Input: D-936R Digital Input: D-923AE Line Output: D-971E, D-971M, D-971R Digital Output: D-972AE Remote Control: D-981, D-983

Note: When installing the unit, never block the intake vents provided in the unit's bottom near the rear.

Windows is a registered trademark or trademark of Microsoft Corporation in the United States and/or other countries.

### »» Digital Speaker Processor

#### DP-SP3



\* 0dB = 0.775V

Model	DP-SP3
Power Source	220 – 240V AC, 50/ 60Hz (CE) or 50Hz (CE-AU)
Power Consumption	25W
Frequency Response	20Hz – 20kHz, ±1dB
Sampling Frequency	96kHz
Dynamic Range	110dB or more
Distortion	0.03% or less, 1kHz, +4dB* input/ output, 20Hz – 20kHz BPF
Crosstalk	–80dB or less, 1kHz
Input	2 channels, +4dB* (max. +24dB*), 10kΩ, electronically-balanced, removable terminal block (3 pins)
Output	6 channels, +4dB* (max. +24dB*), applicable load 600Ω or more, electronically-balanced, removable terminal block (3 pins)
AD/DA Converter	24 bit
Preset Memory	16
Signal Processing Section	
Equalizer/Filter	
Parametric equalizer	20Hz – 20kHz, ±15dB, Q: 0.267 – 69.249
High/low pass filter	20Hz – 20kHz, 6dB/oct, 12dB/oct
Notch filter	20Hz – 20kHz, Q: 8.651 – 69.249
All-pass filter	20Hz – 20kHz, Q: 0.267 – 69.249
High shelving filter	5 – 20kHz, ±15dB
Low shelving filter	20 – 500Hz, ±15dB
Horn equalizer	20kHz, 0 – 18dB in 0.5dB steps
Crossover	2 ways, 3 ways, 4 ways
Crossover Filter	20Hz – 20kHz, 6dB/oct, 12dB/oct, 18dB/oct, 24dB/oct, –15 to +12dB, polarity switchable
Delay	0 – 170.656ms in 0.01ms steps
Compressor	Threshold: –20 to +20dB* in 1dB steps Ratio: 1:1, 1.1:1, 1.2:1, 1.3:1, 1.5:1, 1.7:1, 2:1, 2.3:1, 2.6:1, 3:1, 4:1, 7:1, 8:1, 10:1, 12:1, 20:1, ∞:1 Attack Time: 0.2ms – 5s, Release Time: 10ms – 5s

Delay	0 – 682.656ms in 0.01ms steps
Matrix	2 x 6
Crosspoint Gain	–∞ to 0dB in 1dB steps
Function	Input PAD (–14dB) control, analog output attenuator (–∞ to 0dB in 1dB steps) control, EQ characteristic library for TOA speakers, input/output level indicator (4-point LED indicator), output MUTE switch x 6
Control	
Contact input	
4 channels, open voltage	4 channel, open voltage: 5V DC, short-circuit current: 5mA, removable terminal block (5 pins)
Control function	preset memory selection, volume control, and mute
Network	
Network I/F	1 channel of 10BASE-T/100BASE (auto-negotiation), RJ45 connector, connection via switching hub
Network protocol	TCP/IP
Connection cable	Shielded Cat 5 or higher twisted pair cable for LAN (Cat 5-STP or better)
Max. cable length	100m (between DP-SP3 and switching hub)
Operating Temperature	0°C to 40°C
Operating Humidity	90% RH (no condensation)
Finish	Panel: Aluminum, hairline, black Case: Surface-treated steel plate
Dimensions	482 (W) x 44 (H) x 289 (D) mm
Weight	3.1kg
Accessory	Power supply cord (2m) x 1, Removable terminal plug (3 pins) x 8, Removable terminal plug (5 pins) x 1, Rack mounting screw x 4, CD-ROM (setup software) x 1

»» Digital Ambient Noise Controller

DP-L2



Model	DP-L2
Power Source	220 – 240V AC, 50/ 60 Hz
Power Consumption	20W (220mA)
Frequency Response	20Hz – 20kHz (±1dB)
Sampling Frequency	48kHz
Dynamic Range	108dB or more (IHF-A weighted)
Distortion	0.006% or less, 1kHz, +4dB* input/output (20Hz – 20kHz BPF)
Input	
Sensor input (Ambient noise sensor microphone input)	+4/ –48dB* changeable, 10kΩ, electronically-balanced, removable terminal block (4 pins), phantom power (+15V DC, can be turned on or off with Phantom switch) with +15V DC terminal
Input 1, 2	+4/ –8/ –20dB* changeable, 15kΩ, electronically balanced, removable terminal block (3 pins)
Output	
Monitor output	+4dB*, 600Ω, electronically-balanced, removable terminal block (3 pins)
Output 1, 2	+4dB*, 600Ω, electronically-balanced, removable terminal block (3 pins)
AD/DA Converter	24 bit
Signal Processing	
Automatic level control function	Level meter (4 LED meters), Automatic input signal level control function, Automatic input sensitivity setting function: +4/–8/–20dB* Noise gate level setting: –99 to –3dB

	* 0dB = 0.775V
Ambient noise control function	Level meter (4 LED meters), BGM/Announce level control function, Automatic sensor input reference level measuring function, Sensor input reference level fine adjustment function, Max. output signal level control: –15 to 0dB Mini. output signal level control: –18 to –3dB Sample time setting: 10s, 20s, 30s, 1min, 5min Gain ratio setting: (Ambient noise: output signal level) 6:3, 5:3, 4:3, 3:3, 3:4, 3:5, 3:6 Ambient noise measuring frequency setting: 20Hz – 20kHz, 3 points
Max. output signal level control function	–12, –6, 0, +4, +6, +12, +18, +24dB*
Input Level Indicator	8 LEDs
Output Level Indicator	8 LEDs
Other Feature	Phantom power switch (sensor input), Ground lift switch (INPUT 1, INPUT 2), Key lock function, Input/Output bypass function in power off
Operating Temperature	0°C to +40°C
Operating Humidity	90% RH or less (no condensation)
Finish	Pre-coated steel plate, black, 30% gloss
Dimensions	482 (W) x 44 (H) x 303 (D) mm
Weight	3.7kg
Accessory	Removable terminal plug (4 pins) x 1, Removable terminal plug (3 pins) x 5, Power cord (2m) x 1

Note: Prepare ambient noise sensor microphone separately.

# Speakers (Pro-Sound)

## Line Array Speaker Systems

### Type A Series

#### »» Line Array Speaker

**SR-A12L**  
**SR-A12LWP**  
**SR-A12S**  
**SR-A12SWP**



Model	SR-A12L	SR-A12LWP	SR-A12S	SR-A12SWP
Enclosure	Bass-reflex type			
Power Handling Capacity	Continuous program: Low frequency: 450W, High frequency: 180W			
Rated Impedance	Low frequency: 8Ω, High frequency: 16Ω			
Sensitivity	Low frequency: 98dB (1W, 1m), High frequency: 110dB (1W, 1m)		Low frequency: 98dB (1W, 1m), High frequency: 109dB (1W, 1m)	
Frequency Response	50Hz – 20kHz (when using DP-0206 option)			
Crossover Frequency	1kHz (when using DP-0206 option)			
Directivity Angle	Horizontal: 90° Vertical: 5°		Horizontal: 90° Vertical: 15°	
Speaker Component	Low frequency: 30cm cone-type High frequency: Wave front control horn 90° (horizontal) × 5° (vertical) + compression driver × 2		Low frequency: 30cm cone-type High frequency: Wave front control horn 90° (horizontal) × 15° (vertical) + compression driver × 2	
Input Connector	M5 screw terminal, distance between barriers: 12.2mm and Neutrik NL4MP × 2 (usable cable connector: Neutrik NL4FC)	-	M5 screw terminal, distance between barriers: 12.2mm and Neutrik NL4MP × 2 (usable cable connector: Neutrik NL4FC)	-
Connected Cable	-	Direct cable withdrawal from internal speaker: ø8.6mm, conductor cross section: 1.25mm², 4-core cable, 3m	-	Direct cable withdrawal from internal speaker: ø8.6mm, conductor cross section: 1.25mm², 4-core cable, 3m
Water Protection	-	IPX4	-	IPX4
Operating Temperature	-	-10°C to +50°C	-	-10°C to +50°C
Finish				
Enclosure	Plywood, black, paint	Plywood, black, urethane coating	Plywood, black, paint	Plywood, black, urethane coating
Front Grille	Punched steel plate, black, acrylic paint	Punched stainless steel, black, paint	Punched steel plate, black, acrylic paint	Punched stainless steel, black, paint
Dimensions	740 (W) × 433 (H) × 469 (D) mm	740 (W) × 433 (H) × 469 (D) mm (excluding connected cable)	740 (W) × 433 (H) × 467 (D) mm	740 (W) × 433 (H) × 467 (D) mm (excluding connected cable)
Weight	49kg (including accessories)	51kg (including accessories)	47kg (including accessories)	48kg (including accessories)
Accessory	Joint plate × 2, Joint plate mounting bolt (M10) × 16			
Option	Rigging frame: SR-RF12 Digital processor: DP-SP3	Rigging frame: SR-RF12WP Digital processor: DP-SP3	Rigging frame: SR-RF12 Digital processor: DP-SP3	Rigging frame: SR-RF12WP Digital processor: DP-SP3

#### »» Subwoofer

**SR-A18B**



Model	SR-A18B
Enclosure	Bass-reflex type
Power Handling Capacity	Continuous program: 720W
Rated Impedance	8Ω
Sensitivity	95dB (1W, 1m)
Frequency Response	40Hz – 400Hz (when using DP-SP3 option)
Crossover Frequency	80Hz (when using DP-SP3 option)
Speaker Component	46cm cone-type
Input Connector	M5 screw terminal, distance between barriers: 12.2mm and Neutrik NL4MP × 2 (usable cable connector: Neutrik NL4FC)

Finish	Enclosure: Plywood black, paint Front Grille: Punched steel plate, black, acrylic paint
Dimensions	740 (W) × 573 (H) × 698 (D) mm
Weight	66kg (including accessories)
Accessory	Joint plate × 2, Joint plate mounting bolt (M10) × 16
Option	Rigging frame: SR-RF12 Digital processor: DP-SP3

## Type C Series

### »» Line Array Speaker

**SR-C8L**  
**SR-C8LWP**  
**SR-C8S**  
**SR-C8SWP**



Model	SR-C8L	SR-C8LWP	SR-C8S	SR-C8SWP
Enclosure	Bass-reflex type			
Power Handling Capacity	Continuous program: 360W, (single-amp mode), Low frequency: 360W, High frequency: 180W (bi-amp mode)			
Rated Impedance	16Ω (single-amp mode), Low frequency: 16Ω, high frequency: 16Ω (bi-amp mode)			
Sensitivity	98dB (1W, 1m) (single-amp mode), Low: 95dB (1W, 1m), High: 110dB (1W, 1m) (bi-amp mode)			
Frequency Response	65Hz – 20kHz (when using DP-SP3 option)			
Crossover Frequency	1.6kHz (when using DP-SP3 option)			
Directivity Angle	Horizontal: 110°, Vertical: 5°		Horizontal: 110°, Vertical: 15°	
Speaker Component	Low frequency: 20cm (8") cone type High frequency: Wave-front control horn 110° (horizontal) × 5° (vertical) + compression driver × 2		Low frequency: 20 cm (8") cone type High frequency: Wave-front control horn 110° (horizontal) × 15° (vertical) + compression driver × 2	
Input Connector	M5 screw terminal, distance between barriers: 12.2mm and Neutrik NL4MP × 2	-	M5 screw terminal, distance between barriers: 12.2mm and Neutrik NL4MP × 2	-
Connected Cable	-	Direct cable withdrawal from internal speaker: ø8.6mm conductor cross section: 1.25mm², 4-core cable, 3m	-	Direct cable withdrawal from internal speaker: ø8.6mm conductor cross section: 1.25mm², 4-core cable, 3m
Water Protection	-	IPX4	-	IPX4
Finish				
Enclosure	Plywood, black, urethane paint	Plywood, black, urethane coating	Plywood, black, urethane paint	Plywood, black, urethane coating
Front Grille	Punched steel plate, black, paint	Punched stainless steel, black, paint	Punched steel plate, black, paint	Punched stainless steel, black, paint
Dimensions	526.6 (W) × 293 (H) × 296 (D) mm		526.6 (W) × 293 (H) × 294 (D) mm	
Weight	17kg		16kg	
Accessory	M8 connection bolt × 4			
Option	Cluster bracket: SR-CL8 Rigging frame: SR-RF8 Tilt joint bracket: SR-TP8 Digital processor: DP-SP3	Rigging frame: SR-RF8WP Digital processor: DP-SP3	Cluster bracket: SR-CL8 Rigging frame: SR-RF8 Tilt joint bracket: SR-TP8 Digital processor: DP-SP3	Rigging frame: SR-RF8WP Digital processor: DP-SP3

### »» Subwoofer

**SR-C15B / SR-C15BWP**



Model	SR-C15B	SR-C15BWP
Enclosure	Bass-reflex type	
Power Handling Capacity	Continuous program: 450W	
Rated Impedance	8	
Sensitivity	93dB (1W, 1m)	
Frequency Response	40Hz – 400Hz (when equalized at recommended parameters)	
Crossover Frequency	125Hz (when equalized at recommended parameters)	
Speaker Component	38cm (15") cone type	
Input Connector	M5 screw terminal, distance between barriers: 12.2mm (0.48") and Neutrik NL4MP × 2	-
Connected Cable	-	Direct cable withdrawal from internal speaker: ø8.6 mm (ø0.34") conductor cross section: 1.25 mm² (0.05"), 4-core cable, 3m
Operating Temperature	-	-10°C to +50°C
Water Protection	-	IPX4
Finish	Enclosure: Plywood, black, urethane paint Front Grille: Punched steel plate, black, paint	Enclosure: Plywood, black, urethane coating Front Grille: Punched stainless steel, black, paint
Dimensions	526.6 (W) × 594.8 (H) × 550 (D) mm	
Weight	41kg	
Accessory	M8 connection bolt × 4	
Option	Rigging frame: SR-RF8, Digital processor: DP-SP3	Rigging frame: SR-RF8WP, Digital processor: DP-SP3



## Type H Series

### »» Line Array Speaker

## SR-H2L / SR-H2S



Model	SR-H2L	SR-H2S
Enclosure	Bass-reflex type	
Power Handling Capacity	Continuous program: 180W	
Rated Impedance	8	
Sensitivity	92dB (1W, 1m equivalent, measured at 4m)	90dB (1W, 1m equivalent, measured at 4m)
Frequency Response	80Hz - 18kHz (when using an optional digital processor)	90Hz - 17kHz (when using an optional digital processor)
Directivity Angle	Horizontal: 90°, Vertical: 0° (within the range of speaker height)	Horizontal: 90°, Vertical: 20°
Speaker Component	7cm (2.8") cone-type × 9	
Input Connector	Removable input connector	
Finish	Enclosure: MDF, white, urethane paint Front Grille: Punched steel plate, white, acrylic paint	
Dimensions	84 (W) × 668.4 (H) × 115 (D) mm	84 (W) × 663.4 (H) × 115 (D) mm
Weight	4.4kg	4.2kg
Option	Matching transformer: MT-S0301, Digital processor: DP-SP3, Extension plate: SR-EP3 Wall mounting bracket: SR-WB3, Wall tilt bracket: SR-TB3, Flying bracket: SR-FB3 Speaker stand adapter: SR-SA3 (applicable stand: ST-34B)	

### »» Line Array Speaker

## SR-H3L / SR-H3S



Model	SR-H3L	SR-H3S
Enclosure	Bass-reflex type	
Power Handling Capacity	Continuous program: 360W	
Rated Impedance	8	
Sensitivity	95dB (1W, 1m equivalent, measured at 8m)	92dB (1W, 1m equivalent, measured at 4m)
Frequency Response	110Hz - 18kHz (-10dB) (when equalized at recommended parameters)	90Hz - 17kHz (-10dB) (when equalized at recommended parameters)
Directivity Angle	Horizontal: 90°, Vertical: 0° (within the range of speaker height)	Horizontal: 90°, Vertical: 20°
Speaker Component	7cm (2.8") cone-type × 16	
Input Connector	Removable input connector	
Finish	Enclosure: MDF, white, urethane paint Front Grille: Punched steel plate, white, acrylic paint	
Dimensions	84 (W) × 1186.4 (H) × 115 (D) mm	84 (W) × 1177.2 (H) × 157 (D) mm
Weight	7.6kg	7.9kg
Option	Matching transformer: MT-S0301, Digital processor: DP-SP3, Extension plate: SR-EP3 Wall mounting bracket: SR-WB3, Wall tilt bracket: SR-TB3, Flying bracket: SR-FB3 Speaker stand adapter: SR-SA3 (applicable stand: ST-34B)	

### »» Matching Transformer

## MT-S0301

**Rated Input Power:** 30W  
**Primary Side:** 100V line: 330Ω (30W), 1kΩ (10W)  
 70V line: 170Ω (30W), 330Ω (15W), 1kΩ (5W)  
**Secondary Side:** 8Ω  
**Weight:** 370g



## Type S Series

### »» Line Array Speaker

## SR-S4L / SR-S4LWP



Model	SR-S4L	SR-S4LWP
Enclosure	Bass-reflex type	Sealed type
Power Handling Capacity	Continuous program: 600W (single-amp mode), Low: 240W, High: 240W (bi-amp mode)	
Rated Impedance	8 (single-amp mode), Low: 8, High: 8 (bi-amp mode)	
Sensitivity	94dB (1W, 1m)	
Frequency Response	70Hz – 20kHz (when using DP-SP3 option)	
Crossover Frequency	3.5kHz	
Directivity Angle	Horizontal: 90°, Vertical: 0° (within the range of speaker height)	
Speaker Component	Low frequency: 10cm cone-type x 8, High frequency: 2.5cm balanced dome-type x 24	
Input Connector	M5 screw terminal, distance between barriers: 12.2mm and Neutrik NL4MP x 2 (usable cable connector: Neutrik NL4FC)	-
Connected Cable	-	Direct cable withdrawal from internal speaker: ø8.6mm, conductor cross section: 1.25mm <sup>2</sup> , 4-core cable, 3m
Water Protection	-	IPX4
Operating Temperature	-	-10°C to +50°C
Finish	Enclosure: MDF, white, paint Front Grille: Punched steel plate, white, acrylic paint	Enclosure: Plywood, white, urethane coating Front Grille: Punched stainless steel, white, paint
Dimensions	160 (W) x 895 (H) x 255 (D) mm	160 (W) x 895 (H) x 255 (D) mm (excluding connected cable)
Weight	16kg	
Accessory	Bi-amplifier drive rating label x 1, Bi-amplifier drive input indication label x 1	
Option	Matching transformer: MT-S0601, Extension plate: SR-EP4 Flying bracket: SR-FB4, Wall mounting bracket: SR-WB4 Wall tilt bracket: SR-TB4, Stand adapter: SR-SA4 Protection pad: SR-PP4, Floor stand: SR-FS4 Digital processor: DP-SP3	Matching transformer: MT-S0601 Extension plate: SR-EP4WP, Wall tilt bracket: SR-TB4WP, Wall mounting bracket: SR-WB4WP Protection pad: SR-PP4, Digital processor: DP-SP3

### »» Line Array Speaker

## SR-S4S / SR-S4SWP



Model	SR-S4S	SR-S4SWP
Enclosure	Bass-reflex type	Sealed type
Power Handling Capacity	Continuous program: 600W (single-amp mode), Low: 240W, High: 240W (bi-amp mode)	
Rated Impedance	8 (single-amp mode), Low: 8, High: 8 (bi-amp mode)	
Sensitivity	93dB (1W, 1m)	
Frequency Response	70Hz – 20kHz (when using DP-SP3 option)	
Crossover Frequency	3.5kHz	
Directivity Angle	Horizontal: 90°, Vertical: 10°	
Speaker Component	Low frequency: 10cm cone-type x 8, High frequency: 2.5cm balanced dome-type x 24	
Input Connector	M5 screw terminal, distance between barriers: 12.2mm and Neutrik NL4MP x 2 (usable cable connector: Neutrik NL4FC)	-
Connected Cable	-	Direct cable withdrawal from internal speaker: ø8.6mm, conductor cross section: 1.25mm <sup>2</sup> , 4-core cable, 3m
Water Protection	-	IPX4
Operating Temperature	-	-10°C to +50°C
Finish	Enclosure: MDF, white, paint Front Grille: Punched steel plate, white, acrylic paint	Enclosure: Plywood, white, urethane coating Front Grille: Punched stainless steel, white, paint
Dimensions	160 (W) x 892 (H) x 303 (D) mm	160 (W) x 892 (H) x 303 (D) mm (excluding connected cable)
Weight	16kg	
Accessory	Bi-amplifier drive rating label x 1, Bi-amplifier drive input indication label x 1	
Option	Matching transformer: MT-S0601, Extension plate: SR-EP4 Flying bracket: SR-FB4, Wall tilt bracket: SR-TB4 Stand adapter: SR-SA4, Protection pad: SR-PP4 Digital processor: DP-SP3	Matching transformer: MT-S0601 Extension plate: SR-EP4WP Wall tilt bracket: SR-TB4WP, Protection pad: SR-PP4 Digital processor: DP-SP3

### »» Matching Transformer

## MT-S0601

**Rated Input Power:** 60W  
**Primary Side:** 100V line: 170Ω (60W), 330Ω (30W), 670Ω (15W)  
 70V line: 83Ω (60W), 170Ω (30W), 330Ω (15W), 670Ω (7.5W)  
**Secondary Side:** 8Ω  
**Weight:** 1.2kg



## Type T Series

### Line Array Speaker

#### SR-T5



Model	SR-T5
Enclosure	Bass-reflex type
Power Handling Capacity	Continuous pink noise: 250W Continuous program: 750W
Rated Impedance	8Ω
Sensitivity	96dB (1W, 1m equivalent, measured at 4m)
Frequency Response	70Hz – 20kHz
Crossover Frequency	3kHz
Directivity Angle	Horizontal: 100°, Vertical: 35°
Speaker Component	Low frequency: 13cm (5.12") cone-type × 8 High frequency: Balanced dome type × 24
Recommended Installation Height	4 – 5.5m (Speaker top, when installed in sport facilities 30m in length)
Adjustable Angle Range	Downward: 0°, 1°, 2°, 3° (when the supplied mounting bracket is used) Horizontal (left or right): 5°, 10° (when the optional SR-PB5 Wall Pan Bracket is used)

Input Terminal	M5 screw terminal, distance between barriers: 12.2mm
Finish	Enclosure: Plywood, black, urethane paint Baffle: Polypropylene, black Punched Net: Steel plate, black, acrylic paint Mounting Bracket: Steel plate, black, acrylic paint
Dimensions	310 (W) × 1239 (H) × 341 (D) mm
Weight	29kg (including accessories)
Accessory	Mounting bracket A × 1, Mounting bracket B × 1, Bracket mounting bolt × 6, Side cover × 5, Side cover mounting screw × 10, Eye bolt × 1, Safety wire × 1
Option	Wall Pan Bracket: SR-PB5 (to be used in conjunction with the supplied mounting bracket), Matching Transformer: MT-S0601

## Line Array Series Speakers


### Line Array Speaker

#### HX-5B

#### HX-5W

#### HX-5B-WP

#### HX-5W-WP

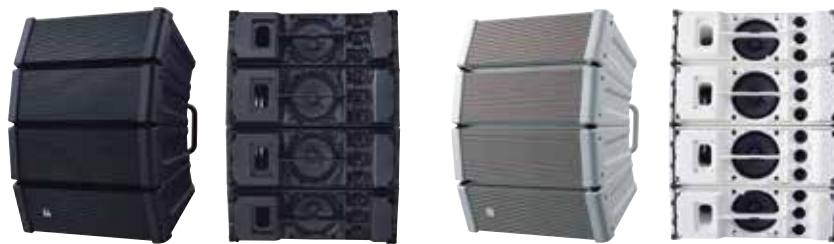


\* Factory-preset: 60° mode

Model	HX-5B	HX-5W	HX-5B-WP	HX-5W-WP
Enclosure	Bass-reflex type		Sealed type	
Power Handling Capacity	Continuous pink noise: 200W, Continuous program: 600W			
Rated Impedance	8Ω			
Sensitivity (1W, 1m)	96dB (60° mode), 97dB (45° mode), 98dB (30° mode), 99dB (15° mode)*			
Frequency Response	70Hz – 20kHz (–10dB) (60° mode), 75Hz – 20kHz (–10dB) (45° mode), 80Hz – 20kHz (–10dB) (30° mode), 85Hz – 20kHz (–10dB) (15° mode)		95Hz – 20kHz (–10dB) (60° mode), 100Hz – 20kHz (–10dB) (45° mode), 105Hz – 20kHz (–10dB) (30° mode), 110Hz – 20kHz (–10dB) (15° mode)	
Crossover Frequency	4kHz			
Directivity Angle	Horizontal: 100° (2kHz or more) Vertical: 60° (800Hz or more), 45° (1.2kHz or more), 30° (1.6kHz or more), 15° (3.2kHz or more) variable			
Speaker Component	Low frequency: 12cm cone-type × 4, High frequency: Balanced dome-type × 12			
Input Terminal	Speakon NL4MP × 2 and M4 screw terminal		-	
Speaker Cord	-		2-core cabtyre cord with diameter of 6mm	
Water Protection	-		IPX4 (Install with the every speaker module downward)	
Operating Temperature	-		-15°C to +50°C	
Finish Enclosure Punched Net	Polypropylene, black Surface-treated steel plate, black	Polypropylene, white Surface-treated steel plate, white	Polypropylene, black Surface-treated steel plate, black, rust-proof coating	Polypropylene, white Surface-treated steel plate, white, rust-proof coating
Dimensions	408 (W) × 546 (H) × 342 (D) mm			
Weight	16kg			
Accessory	Hanging bracket × 2, Hex. wrench × 1			
Option	Matching transformer: MT-200 Speaker mounting bracket: HY-PF1B, HY-CW1B, HY-WM1B, HY-WM2B, HY-CN1B Speaker stand adapter: HY-ST1	Matching transformer: MT-200 Speaker mounting bracket: HY-PF1W, HY-CW1W, HY-WM1W, HY-WM2W, HY-CN1W Speaker stand adapter: HY-ST1	Matching transformer: MT-200 Speaker mounting bracket: HY-PF1WP, HY-CW1WP, HY-WM1WP, HY-WM2WP, HY-CN1B-WP	Matching transformer: MT-200 Speaker mounting bracket: HY-PF1WP, HY-CW1WP, HY-WM1WP, HY-WM2WP, HY-CN1W-WP

## » Line Array Speaker

# HX-7B HX-7W HX-7B-WP HX-7W-WP

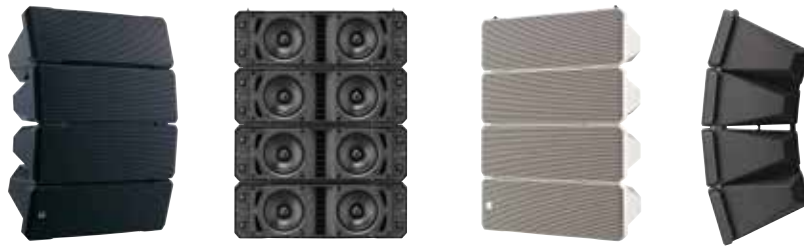

Model	HX-7B	HX-7W	HX-7B-WP	HX-7W-WP
Enclosure	Bass-reflex type		Sealed type	
Power Handling Capacity	Continuous pink noise: 250W (IEC60268-5: 350 W), Continuous program: 750W			
Rated Impedance	8Ω			
Sensitivity (1W, 1m)	100dB			
Frequency Response	75Hz – 20kHz		105Hz – 20kHz	
Crossover Frequency	1.7kHz			
Directivity Angle	Horizontal: 100° Vertical: Depending on directivity angle mode			
Speaker Component	Low frequency: 13cm (5.5") cone-type × 8, High frequency: Wave front control horn with compression driver x 4			
Input Terminal	Speakon NL4MP × 2 and M4 screw terminal, distance between barriers: 9mm (0.35")			
Water Protection	-		IPX4 (Install with the every speaker module downward)	
Finish				
Enclosure	Polypropylene, black	Polypropylene, white	Polypropylene, black	Polypropylene, white
Punched Net	Surface-treated steel plate, black, paint	Surface-treated steel plate, white paint	Surface-treated steel plate, black, rust-proof coating	Surface-treated steel plate, white, rust-proof coating
Hanging bracket	Steel plate, t3.0, black, paint	Steel plate, t3.0, white, paint	-	-
Dimensions	497 (W) × 664 (H) × 274 (D) mm			
Weight	30kg			
Accessory	Hanging bracket L, R (L and R are symmetrical to each other) ...1 each Hanging bracket mounting bolt ...4		Terminal cover ...1, terminal cover mounting screw ...4, rubber packing ...1	
Option	Matching transformer: MT-200 Matching transformer Adapter: HY-MT7 Speaker mounting bracket: HY-60DB/W, HY-CN7B/W, HY-PF7B/W HY-VM7B/W, HY-WM7B/W, HY-C0801W Speaker stand adapter: HY-ST7		Matching transformer: MT-200 Matching transformer Adapter: HY-MT7 Speaker mounting bracket: HY-TM7B/W-WP, HY-MS7B/W-WP HY-60DB/W-WP, HY-CN7B/W-WP	

## » Subwoofer

# FB-120B FB-120W



Model	FB-120B	FB-120W
Power Handling Capacity	Continuous pink noise: 200W, Continuous program: 600W	
Impedance	8Ω	
Sensitivity	90dB (1W, 1m) at installation in free sound field 96dB (1W, 1m) at installation in 1/2 free sound field	
Frequency Response	40Hz – 1.2kHz (–10dB)	
Speaker Component	30cm cone-type	
Input Terminal	Speakon NL4MP x 2 and M4 screw terminal, distance between barriers: 11mm	
Finish	Enclosure: Plywood Punched net: Surface-treated steel plate, black, paint	Enclosure: Plywood Punched net: Surface-treated steel plate, white, paint
Dimensions	408 (W) x 408 (H) x 450 (D) mm	
Weight	15kg	
Option	Speaker rigging frame: HY-PF1B	Speaker rigging frame: HY-PF1W

## » Subwoofer

# FB-150B FB-150W



Model	FB-150B	FB-150W
Power Handling Capacity	Continuous pink noise: 200W, Continuous program: 600W	
Impedance	8Ω	
Sensitivity	93dB (1W, 1m)	
Frequency Response	40Hz – 400Hz (–10dB)	
Speaker Component	38cm cone-type	
Input Terminal	Speakon NL4MP x 2 and M5 screw terminal, distance between barriers: 12.2 mm	
Finish	Enclosure: MDF, black, urethane paint Punched net: Surface-treated steel plate, black, paint	Enclosure: MDF, white, urethane paint Punched net: Surface-treated steel plate, white, paint
Dimensions	505 (W) x 528 (H) x 477 (D) mm	
Weight	30kg	
Option	Speaker rigging frame: HY-PF7B	Speaker rigging frame: HY-PF7W

## » Matching Transformer

### MT-200



**Rated Input:** 200W  
**Primary Impedance:** 100V line: 50Ω (200W), 83Ω (120W), 167Ω (60W); 70V line: 25Ω (200W), 50Ω (100W), 83Ω (60W), 167Ω (30W)  
**Secondary Impedance:** 8Ω  
**Water Protection:** IPX4 (the tilt angle must be within 45°)\*  
**Finish:** Cover: Polypropylene, Mounting Bracket: Stainless steel  
**Dimensions:** 164 (W) x 141 (H) x 129 (D) mm  
**Weight:** 2.8kg  
**Accessory:** Speaker mounting bolt (M8) with washer x 2

Note: When the matching transformer is installed on the HX-5 series rear mounting plate, the optional HY-WM1 series and HY-CW1 series Speaker Mounting Brackets, and HY-ST1 Speaker Stand Adapter cannot be used.

## Slim Array Speakers

### » Slim Array Speaker

#### TZ-S60W-EA



Model	TZ-S60W-EA
Enclosure	Bass-reflex type
Max. Input Power (Low imp.)	120W (continuous pink noise)
Rated Input (High imp.)	60W
Rated Impedance	Low Impedance: 8Ω 100V line: 167Ω (60W), 330Ω (30W), 500Ω (20W), 1kΩ (10W)
Sensitivity	95dB (1W, 1m)
Frequency Response	180Hz - 15kHz
Speaker Component	8cm (3") cone-type x 9
Connector	Push-in terminals
Operating Temperature	-10°C to +50°C
Directivity Angle	Horizontal: 90°, Vertical: 0°
Impedance Change	Rotary switch (selectable)
Finish	Enclosure: MDF, paint, white Punched net, wall bracket, side, panel, metal cover: SECC, paint, white
Dimensions	100 (W) x 883 (H) x 130 (D) mm

Weight	8.2kg
Accessory	Speaker bracket x 1, Joint bracket x 1, Wall bracket x 1, Fixing bolt (M5 x 60) x 1, Hexagon bolt (M6 x 12, with plain washer and spring washer) x 2, Machine screw (M5 x 15, with plain washer and spring washer) x 4
Option	HY-S60W (Side stack bracket x 2, Rear stack bracket x 1)

### » Stacking Bracket

#### HY-S60W-EA



## HS Series Speakers

### Coaxial Array Speakers

### » Coaxial Array Speaker

#### HS-120B

#### HS-120W

#### HS-1200BT

#### HS-1200WT



Model	HS-120B	HS-120W	HS-1200BT	HS-1200WT
Enclosure	Sealed type			
Rated Input	-		60W (High impedance)	
Power Handling Capacity	Continuous pink noise: 100W, Continuous program: 300W			
Rated Impedance	8Ω		8Ω 100V line: 170Ω (60W), 330Ω (30W), 670Ω (15W) 70V line: 83Ω (60W), 170Ω (30W), 330Ω (15W), 670Ω (7.5W)	
Sensitivity	97dB (1W, 1m)			
Frequency Response	80Hz – 20kHz		70Hz – 20kHz	
Crossover Frequency	3kHz			
Directivity Angle	Horizontal: 90°, Vertical: 40°			
Speaker Component	Low frequency: 30cm (12") cone-type, High frequency: Balanced dome tweeter × 6			
Input Terminal	NEUTRIK NL4MP Speakon and M4 screw terminal, distance between barriers: 9mm			
Operating Temperature	-10°C to +50°C			
Finish				
Enclosure	Polypropylene, black	Polypropylene, white	Polypropylene, black	Polypropylene, white
Punched Net	Surface-treated steel plate, black	Surface-treated steel plate, white	Surface-treated steel plate, black	Surface-treated steel plate, white
Dimensions	361 (W) × 448 (H) × 320 (D) mm			
Weight	8.5kg		10kg	
Accessory	Handle × 1, Handle fitting bracket × 2, Handle mounting screw × 2, Rubber foot × 2, Rubber foot mounting screw × 2			
Option	Mounting bracket: HY-1200VB (vertical), HY-1200HB (horizontal) Ceiling mount bracket: HY-CO801 Wall mounting bracket: HY-W0801 Speaker stand: ST-34B	Mounting bracket: HY-1200VW (vertical), HY-1200HW (horizontal) Ceiling mount bracket: HY-CO801W Wall mounting bracket: HY-W0801W Speaker stand: ST-34B	Mounting bracket: HY-1200VB (vertical), HY-1200HB (horizontal) Ceiling mount bracket: HY-CO801 Wall mounting bracket: HY-W0801 Speaker stand: ST-34B	Mounting bracket: HY-1200VW (vertical), HY-1200HW (horizontal) Ceiling mount bracket: HY-CO801W Wall mounting bracket: HY-W0801W Speaker stand: ST-34B



## » Coaxial Array Speaker

# HS-150B HS-150W HS-1500BT HS-1500WT



Model	HS-150B	HS-150W	HS-1500BT	HS-1500WT
Enclosure	Sealed type			
Rated Input	-		60W (High impedance)	
Power Handling Capacity	Continuous pink noise: 100W, Continuous program: 300W			
Rated Impedance	8Ω		8Ω 100V line: 170Ω (60W), 330Ω (30W), 670Ω (15W) 70V line: 83Ω (60W), 170Ω (30W), 330Ω (15W), 670Ω (7.5W)	
Sensitivity	98dB (1W, 1m)			
Frequency Response	70Hz – 20kHz		60Hz – 20kHz	
Crossover Frequency	3kHz			
Directivity Angle	Horizontal: 90°, Vertical: 40°			
Speaker Component	Low frequency: 38cm (15") cone-type, High frequency: Balanced dome tweeter × 6			
Input Terminal	NEUTRIK NL4MP Speakon and M4 screw terminal, distance between barriers: 9mm			
Operating Temperature	−10°C to +50°C			
Finish Enclosure Punched Net	Polypropylene, black Surface-treated steel plate, black	Polypropylene, white Surface-treated steel plate, white	Polypropylene, black Surface-treated steel plate, black	Polypropylene, white Surface-treated steel plate, white
Dimensions	451 (W) × 560 (H) × 400 (D) mm			
Weight	12kg		14kg	
Accessory	Handle × 1, Handle fitting bracket × 2, Handle mounting screw × 2, Rubber foot × 2, Rubber foot mounting screw × 2			
Option	Mounting bracket: HY-1500VB (vertical), HY-1500HB (horizontal) Ceiling mount bracket: HY-CO801 Wall mounting bracket: HY-W0801 Speaker stand: ST-34B	Mounting bracket: HY-1500VW (vertical), HY-1500HW (horizontal) Ceiling mount bracket: HY-CO801W Wall mounting bracket: HY-W0801W Speaker stand: ST-34B	Mounting bracket: HY-1500VB (vertical), HY-1500HB (horizontal) Ceiling mount bracket: HY-CO801 Wall mounting bracket: HY-W0801 Speaker stand: ST-34B	Mounting bracket: HY-1500VW (vertical), HY-1500HW (horizontal) Ceiling mount bracket: HY-CO801W Wall mounting bracket: HY-W0801W Speaker stand: ST-34B

## 2-way Passive Speakers

### » 2-way Passive Speaker System

# SR-F04 / SR-F08



Model	SR-F04	SR-F08
Enclosure	2-way, passive, bass-reflex type	
Power Handling Capacity	Continuous pink noise: 80 W Continuous program: 240 W	Continuous pink noise: 120 W Continuous program: 360 W
Rated Impedance	8 Ω	
Sensitivity	88 dB (1 W, 1 m)	91 dB (1 W, 1 m)
Frequency Response	80 Hz - 20 kHz	65 Hz - 20 kHz
Crossover Frequency	3 kHz	1.5 kHz
Directivity Angle	70° Conical	Horizontal: 90°, Vertical: 60° (Horn at 90° Rotation, Horizontal: 60°, Vertical: 90°)
Speaker Component	Low frequency: 10 cm (4") cone-type × 2 High Frequency: Compression driver fitted with CD horn	Low frequency: 20 cm (8") cone-type High Frequency: Compression driver fitted with CD horn
Connector	Neutrik NL4MP × 2, M4 screw terminal, distance between barriers: 11 mm (0.43")	
Finish	Enclosure: Birch plywood, black, polyurea coating Grille: Steel plate, black, 40% gloss, paint	
Dimensions	165 (W) × 400 (H) × 177 (D) mm (6.5" × 15.75" × 6.97")	249 (W) × 450 (H) × 243 (D) mm (9.8" × 17.72" × 9.57")
Weight	5.8 kg (12.79 lb)	11 kg (24.25 lb)
Option	Speaker mounting bracket: HY-B0801, HY-UH04, HY-UV04 Ceiling mount bracket: HY-C0801 Speaker wall mount bracket: HY-W0801, HY-WM04 Speaker stand adapter: HY-ST04	Speaker mounting bracket: HY-B0801, HY-UH08, HY-UV08 Ceiling mount bracket: HY-C0801 Speaker wall mount bracket: HY-W0801, HY-WM08 Speaker stand: ST-34B

## H Series Speakers

### »» 2-Way Flush Mount Speaker

#### H-1



Model	H-1
<b>Enclosure</b>	Sealed type
<b>Power Handling</b>	90W (continuous program, 4Ω) 30W (continuous pink noise, 4Ω)
<b>Rated Input</b>	12W (16Ω, high impedance)
<b>Rated Impedance</b>	4Ω, 16Ω 100V line: 830Ω (12W), 1.7kΩ (6W), 3.3kΩ (3W) 70V line: 420Ω (12W), 830Ω (6W), 1.7kΩ (3W), 3.3kΩ (1.5W)
<b>Sensitivity</b>	85dB (1W, 1m) at installation in 1/2 free sound field (Measured by installing the unit in the center of a wall)
<b>Frequency Response</b>	120Hz - 20kHz
<b>Speaker Component</b>	Low frequency: 8cm x 5cm cone-type High frequency: Balanced dome-type
<b>Input Terminal</b>	Detachable screw terminal, (+)/(-) 2 each (for bridging connection)

<b>Usable Cable</b>	Solid cable, stranded cable: 0.2 - 2.5mm <sup>2</sup> (AWG No. 24 - 14 equivalent)
<b>Finish</b>	Cover: Fire-resistant ABS resin, white, paint Punched net: Steel plate, white, paint Adapter frame: Stainless steel
<b>Dimensions</b>	312 (W) x 126 (H) x 90 (D) mm
<b>Weight</b>	1.5kg (including adapter frame)
<b>Accessory</b>	Adapter frame x 1, Mounting screw (M4 x 25) x 4, Hole pattern paper x 1
<b>Other Feature</b>	Enclosure mounting angle: Up to 90° adjustable

\* When installing, mount the adapter frame as an electrical box cover.

(The adapter frame HY-H1 is also available as an optional accessory)

\* It is also possible to mount the speaker directly to the electrical box. (without a cover)

### »» 2-Way Surface Mount Speaker

#### H-2 / H-2WP



Model	H-2	H-2WP
<b>Enclosure</b>	Sealed type	
<b>Power Handling</b>	120W (continuous program, 4Ω), 40W (continuous pink noise, 4Ω)	
<b>Rated Input</b>	12W (16Ω, high impedance)	
<b>Rated Impedance</b>	4Ω, 16Ω; 100V line: 830Ω (12W), 1.7kΩ (6W), 3.3kΩ (3W) 70V line: 420Ω (12W), 830Ω (6W), 1.7kΩ (3W), 3.3kΩ (1.5W)	
<b>Sensitivity</b>	88dB (1W, 1m) at installation in 1/2 free sound field (Measured by installing the unit in the center of a wall)	
<b>Frequency Response</b>	100Hz - 20kHz	
<b>Dust/Water Protection</b>	-	IP64
<b>Speaker Component</b>	Low frequency: 10cm cone-type, High frequency: Balanced dome-type	
<b>Input Terminal</b>	Detachable screw terminal, (+)/(-) 2 each (for bridging connection)	
<b>Usable Cable</b>	Solid cable, stranded cable: 0.2 - 2.5mm <sup>2</sup> (AWG No. 24 - 14 equivalent)	
<b>Finish</b>	Steel plate, white, paint Fire-resistant ABS resin, white, paint Steel plate	Steel plate (zinc plating), white, powder coating Fire-resistant ABS, white, paint Stainless plate
<b>Dimensions</b>	ø268 x 111mm	
<b>Weight</b>	2.1kg (including base frame)	
<b>Accessory</b>	Base frame x 1, Electrical box mounting screw x 1 set	
<b>Usable Electrical Box</b>	1-gang type (with cover) *	
<b>Other Feature</b>	Angle of speaker: 360° adjustable in parallel to the mounting surface (For H-2WP, the angle should be kept within 45° left and right each in a downward direction for the wall installation.)	

\* Without using an electrical box, mounting the supplied base frame directly to a wall or ceiling allows the speaker installation.

Note: Do not install H-2WP where it is likely to be corroded in such places as indoor pools, bathrooms or seaside.

### »» 2-Way Wall Mount Speaker

#### H-3 / H-3WP



Model	H-3	H-3WP
<b>Enclosure</b>	Sealed type	
<b>Power Handling Capacity</b>	150W (continuous program, 8Ω), 50W (continuous pink noise, 8Ω)	
<b>Rated Input</b>	30W (16Ω, high impedance)	
<b>Rated Impedance</b>	8Ω, 16Ω; 100V line: 330Ω (30W), 670Ω (15W), 1.3kΩ (7.5W) 70V line: 170Ω (30W), 330Ω (15W), 670Ω (7.5W), 1.3kΩ (3.75W)	
<b>Sensitivity</b>	89dB (1W, 1m) at installation in 1/2 free sound field (Measured by installing the unit in the center of a wall)	
<b>Frequency Response</b>	100Hz - 20kHz (-10dB) at installation in 1/2 free sound field (Measured by installing the unit in the center of the wall)	
<b>Crossover Frequency</b>	4kHz	
<b>Water Protection</b>	-	IPX4
<b>Speaker Component</b>	Low frequency: 10cm cone-type x 2, High frequency: 2.5cm dome-type (neodymium magnet)	
<b>Input Terminal</b>	Detachable screw terminal, (+)/(-) 2 each (for bridging connection)	
<b>Usable Cable</b>	Solid cable, stranded cable: 0.2 - 2.5mm <sup>2</sup> (AWG No. 24 - 14)	
<b>Finish</b>	Enclosure: Fire-resistant ABS resin, black Front Frame: Fire-resistant ABS resin, off-white, paint Punched Net: Steel plate, off-white, paint Base Frame: Steel plate, plating	Fire-resistant ABS resin, black Fire-resistant ABS resin, off-white, paint Steel plate (zinc plating), off-white, powder coating Stainless steel
<b>Dimensions</b>	295 (W) x 318 (H) x 129 (D) mm	
<b>Weight</b>	3.3kg	
<b>Accessory</b>	Front grille x 1, Base frame x 1, Electrical box mounting screw x 1 set	
<b>Usable Electrical Box</b>	2-gang type	

Note: Avoid using H-3WP near the shore or at an indoor swimming pool, as doing so may significantly reduce the product life.

## »» Wall/Ceiling Mount Subwoofer

### HB-1



Model	HB-1
Enclosure	Acoustic Super Woofer
Power Handling Capacity	240W (Continuous program, 40Hz - 200Hz) 80W (Continuous pink noise, 40Hz - 200Hz)
Rated Impedance	8Ω
Sound Pressure Level	91dB (1W, 1m) installation in 1/2 free sound field (Measured by installing the unit in the center of a ceiling or wall.) 85dB (1W, 1m) installation in free sound field (Measured in anechoic chamber)
Frequency Response	45Hz - 200Hz (-10dB) installation in 1/2 free sound field (Measured by installing the unit in the center of a ceiling or wall.)
Speaker Component	20cm cone speaker
Input Terminal	Detachable screw terminal, (+)/(-) 2 each (for bridging connection)

Usable Cable	Solid cable, stranded cable: 0.2 - 2.5mm <sup>2</sup> (AWG No. 24 - 14)
Finish	Enclosure: Steel plate, black, paint Front Frame: Fire-resistant ABS resin, off-white, paint Punched Net: Steel plate, off-white, paint Mounting Bracket: Steel plate, black, paint
Dimensions	430 (W) x 544 (H) x 135 (D) mm
Weight	11kg (including front grille and mounting bracket)
Accessory	Front frame x 1, Mounting bracket x 1 set, Anchor piece x 2, Stud holder x 4, Screw x 1 set
Option	Matching transformer: MT-S0601 (rated 60W)

## F Series Speakers

### 2-Way Wide-Dispersion Speakers

#### »» 2-Way Wide-Dispersion Speaker

**F-1000B / F-1000W**

**F-1000BT / F-1000WT**

**F-1000BTWP / F-1000WTWP**



Model	F-1000B	F-1000W	F-1000BT	F-1000WT	F-1000BTWP	F-1000WTWP
Enclosure	Bass-reflex type					
Power Handling Capacity	Continuous pink noise: 30W Coinuous program: 90W		Continuous pink noise: 30W (low impedance) Continuous program: 90W (low impedance)		-	
Rated Input	-		15W (high impedance)		15W	
Rated Impedance	8Ω		8Ω; 100V line: 670Ω (15W), 2kΩ (5W), 3.3kΩ (3W), 10kΩ (1W) 70V line: 330Ω (15W), 670Ω (7.5W), 2kΩ (2.5W), 3.3kΩ (1.5W), 10kΩ (0.5W)		100V line: 670Ω (15W), 2kΩ (5W), 3.3kΩ (3W), 10kΩ (1W) 70V line: 330Ω (15W), 670Ω (7.5W), 2kΩ (2.5W), 3.3kΩ (1.5W), 10kΩ (0.5W)	
Sensitivity	87dB (1W, 1m) at installation in 1/2 free sound field					
Frequency Response	85Hz - 20kHz, -10dB at installation in 1/2 free sound field					
Crossover Frequency	5kHz					
Directivity Angle	Horizontal: 90°, Vertical: 90°					
Speaker Component	Low frequency: 10cm (4") cone-type, High frequency: Balanced dome tweeter					
Input Terminal	Push-in terminal					
Water Protection	-				IPX4	
Operating Temperature	-				-10°C to +50°C	
Finish	Enclosure: HIPS, black/white Punched net: Surface-treated steel plate, black/white, paint Joint bracket, wall bracket: Steel plate, t1.6, black/white, paint Speaker bracket: Die-cast aluminum, black/white, paint				Enclosure: HIPS, black/white Punched net: Surface-treated steel plate, black/white, anti-corrosive paint Joint bracket, wall bracket: Steel plate Speaker bracket: Die-cast aluminum, black/white, paint	
Dimensions	130 (W) x 202 (H) x 131 (D) mm					
Weight	1.8kg (including the supplied brackets)		2kg (including the supplied brackets)			
Accessory	Speaker bracket x 1, Joint bracket x 1, Wall bracket x 1, Bracket fixing screw x 1 set					Speaker bracket x 1, Joint bracket x 1, Wall bracket x 1, Bracket fixing screw x 1 set, Terminal cover x 1, Terminal cover mounting screw x 4
Option	Board hanger bracket: HY-BH10B Ceiling mount bracket: HY-CM10B/HY-CM10W (used for horizontal speaker mounting) Cluster bracket: HY-CL10B Speaker stand: ST-16A					Speaker mount bracket: YS-60B

### »» 2-Way Wide-Dispersion Speaker

## F-1300B / F-1300W F-1300BT / F-1300WT F-1300BTWP / F-1300WTWP



Model	F-1300B	F-1300W	F-1300BT	F-1300WT	F-1300BTWP	F-1300WTWP
Enclosure	Bass-reflex type					
Power Handling Capacity	Continuous pink noise: 50W Continuous program: 150W		Continuous pink noise: 50W (low impedance) Continuous program: 150W (low impedance)		-	
Rated Input	-		30W (high impedance)		30W	
Rated Impedance	8Ω		8Ω; 100V line: 330Ω (30W), 1kΩ (10W), 3.3kΩ (3W), 10kΩ (1W) 70V line: 170Ω (30W), 330Ω (15W), 1kΩ (5W), 3.3kΩ (1.5W), 10kΩ (0.5W)		100V line: 330Ω (30W), 1kΩ (10W), 3.3kΩ (3W), 10kΩ (1W) 70V line: 170Ω (30W), 330Ω (15W), 1kΩ (5W), 3.3kΩ (1.5W), 10kΩ (0.5W)	
Sensitivity	90dB (1W, 1m) at installation in 1/2 free sound field					
Frequency Response	80Hz - 20kHz, -10dB at installation in 1/2 free sound field					
Crossover Frequency	2kHz					
Directivity Angle	Horizontal: 110°, Vertical: 100°					
Speaker Component	Low frequency: 13cm (5") cone-type, High frequency: 25mm (1") dome tweeter					
Input Terminal	Push-in terminal					
Water Protection	-				IPX4	
Operating Temperature	-				-10°C to +50°C	
Finish	Enclosure: HIPS, black/white Punched net: Surface-treated steel plate, black/white, paint Joint bracket, wall bracket: Steel plate, t1.6, black/white, paint Speaker bracket: Die-cast aluminum, black/white, paint				Enclosure: HIPS, black/white Punched net: Surface-treated steel plate, black/white, anti-corrosive paint Joint bracket, wall bracket: Steel plate Speaker bracket: Die-cast aluminum, black/white, paint	
Dimensions	162 (W) x 250 (H) x 161 (D) mm					
Weight	3.1kg (including the supplied brackets)		3.6kg (including the supplied brackets)			
Accessory	Speaker bracket x1, Joint bracket x1, Wall bracket x1, Bracket fixing screw x1 set				Speaker bracket x1, Joint bracket x1, Wall bracket x1, Bracket fixing screw x1 set, Terminal cover x1, Terminal cover mounting screw x4	
Option	Board hanger bracket: HY-BH10B Ceiling mount bracket: HY-CM10B/HY-CM10W (used for horizontal speaker mounting) Cluster bracket: HY-CL10B, Speaker stand: ST-16A				Speaker mount bracket: YS-60B	

### »» 2-Way Wide-Dispersion Speaker

## F-2000B / F-2000W F-2000BT / F-2000WT F-2000BTWP / F-2000WTWP



Model	F-2000B	F-2000W	F-2000BT	F-2000WT	F-2000BTWP	F-2000WTWP
Enclosure	Bass-reflex type					
Power Handling Capacity	Continuous pink noise: 60W Continuous program: 180W		Continuous pink noise: 60W (low impedance) Continuous program: 180W (low impedance)		-	
Rated Input	-		60W (high impedance)		60W	
Rated Impedance	8Ω		8Ω; 100V line: 170Ω (60W), 330kΩ (30W), 670kΩ (15W), 3.3kΩ (3W) 70V line: 83Ω (60W), 170Ω (30W), 330kΩ (15W), 670kΩ (7.5W), 3.3kΩ (1.5W)		100V line: 170Ω (60W), 330kΩ (30W), 670kΩ (15W), 3.3kΩ (3W) 70V line: 83Ω (60W), 170Ω (30W), 330kΩ (15W), 670kΩ (7.5W), 3.3kΩ (1.5W)	
Sensitivity	92dB (1W, 1m) at installation in 1/2 free sound field; 93dB (1W, 1m) at installation in 1/2 free sound field (with horn adapter)					
Frequency Response	65Hz - 20kHz, -10dB at installation in 1/2 free sound field					
Crossover Frequency	2.5kHz					
Directivity Angle	Horizontal: 110°, Vertical: 100°; Horizontal: 80°, Vertical: 80° (with horn adapter)					
Speaker Component	Low frequency: 20cm cone-type, High frequency: 25mm dome tweeter					
Input Terminal	Push-in terminal					
Water Protection	-				IPX4	
Operating Temperature	-				-10°C to +50°C	
Finish	Enclosure: HIPS, black/white Punched net: Surface-treated steel plate, black/white, paint Joint bracket, wall bracket: Steel plate, t2.0, black/white, paint Speaker bracket: Die-cast aluminum, black/white, paint				Enclosure: HIPS, black/white Punched net: Surface-treated steel plate, black/white, anti-corrosive paint Joint bracket, wall bracket: Steel plate Speaker bracket: Die-cast aluminum, black/white, paint	
Dimensions	244 (W) x 373 (H) x 235 (D) mm					
Weight	6.5kg (including the supplied brackets)		7.4kg (including the supplied brackets)			
Accessory	Speaker bracket x1, Joint bracket x1, Wall bracket x1, Bracket fixing screw x1 set, Horn adapter x1, Horn adapter mounting screw x4				Speaker bracket x1, Joint bracket x1, Wall bracket x1, Bracket fixing screw x1 set, Horn adapter x1, Horn adapter mounting screw x4, Terminal cover x1, Terminal cover mounting screw x4	
Option	Ceiling mount bracket: HY-CM20B/HY-CM20W (used for the horizontal speaker mounting) Cluster bracket: HY-CL20B; Speaker stand: ST-16A				Speaker mount bracket: SP-131, YS-60B	

Note for F Series Speakers: Bolts and nuts for mounting the bracket to the wall or ceiling are not included. Prepare them separately.  
For TWP models: Avoid installing the speaker in locations close to the seashore or in indoor swimming facilities that are not well ventilated.  
In such locations the bracket may be vulnerable to corrosion, eventually allowing the speaker to fall resulting in personal injury.  
Caution on installation: Do not install at places where it is likely to be corroded such as bath room, indoor pools, or seaside.

## Wide-Dispersion Ceiling Speakers

»» 6W Series Full Range / 6W Series 2-Way Range

F-1522SC  
F-2352SC



Model	F-1522SC	F-2352SC
<b>Rated Input</b>	6W (high impedance)	
<b>Power Handling Capacity</b>	Continuous pink noise: 9W (8Ω), 6W (16Ω); Continuous program: 18W (8Ω), 12W (16Ω)	
<b>Impedance</b>	16Ω, 8Ω; 100V line: 1.7kΩ (6W), 3.3kΩ (3W) 70V line: 830Ω (6W), 1.7kΩ (3W), 3.3kΩ (1.5W) 25V line: 830Ω (0.75W), 1.7kΩ (0.4W), 3.3kΩ (0.2W)	16Ω, 8Ω; 100V line: 1.7kΩ (6W), 3.3kΩ (3W), 10kΩ (1W), 20kΩ (0.5W) 70V line: 830Ω (6W), 1.7kΩ (3W), 3.3kΩ (1.5W), 10kΩ (0.5W), 20kΩ (0.25W) 25V line: 830Ω (0.75W), 1.7kΩ (0.4W), 3.3kΩ (0.2W), 10kΩ (0.06W), 20kΩ (0.03W)
<b>Sensitivity</b>	88dB (1W, 1m)	89dB (1W, 1m)
<b>Frequency Response</b>	65Hz – 18kHz (–10dB), 45Hz – 20kHz (–20dB) at installation in 1/2 free sound field (measured by installing the unit in the center of a ceiling.)	80Hz – 20kHz (–10dB), 50Hz – 20kHz (–20dB) at installation in 1/2 free sound field (measured by installing the unit in the center of a ceiling.)
<b>Speaker Component</b>	10cm cone- type	High frequency: Balanced dome- type, Low frequency: 12cm cone-type
<b>Mounting Hole</b>	ø135mm (max. ceiling thickness: 37mm)	ø200mm (max. ceiling thickness: 37mm)
<b>Input Terminal</b>	Push-in connector (Bridging terminal-2 branch type)	
<b>Usable Cable</b>	600V Vinyl-insulated cable (IV wire or HIV wire), Solid copper wire: ø0.8 – ø1.6mm (equivalent to AWG No.20 – 15) 7-core twisted copper wire: 0.75 – 1.25mm <sup>2</sup> (equivalent to AWG No.18 – 17)	
<b>Finish</b>	Baffle: Fire-resistant ABS resin (resin material grade: UL-94 V-0), black; Rim: Fire-resistant ABS resin (resin material grade: UL-94 V-0), white, paint Punched net: Steel plate, white, paint; Dust-proof bag: Artificial fiber, black	
<b>Dimensions</b>	ø155 x 117 (D) mm	ø230 x 154 (D) mm
<b>Weight</b>	1kg (including panel)	1.5kg (including panel)
<b>Accessory</b>	Panel x 1, Paper pattern x 1	Panel x 1, Paper pattern x 1
<b>Option</b>	Reinforcement ring: HY-RR1	Reinforcement ring: HY-RR2, Back can: HY-BC1, Anchor hanging bracket: HY-AH1 (HY-RR2 required), Tile bar bridge: HY-TB1 (HY-RR2 required), Trim ring: HY-TR1 (HY-RR2 required)

»» High-Power 60W  
2-Way Wide Range  
(16cm cone)

F-2852C



»» 30W Series  
Full Range  
(12cm cone)

F-2322C



»» 30W Series  
2-Way Range  
(12cm one)

F-2352C



»» 30W Series Full Range  
(12cm cone, equalizing  
controlled type)

F-122C



Model	F-2852C	F-2322C	F-2352C	F-122C
Enclosure	Bass-reflex type			
Rated Input	60W (high impedance)	30W (high impedance)		
Power Handling Capacity	Continuous pink noise: 90W (8Ω), 60W (16Ω); Continuous program: 180W (8Ω), 120W (16Ω)	Continuous pink noise: 60W (8Ω), 30W (16Ω) Continuous program:120W (8Ω), 60W (16Ω)		
Impedance	16Ω, 8Ω; 100V line: 170Ω (60W), 330Ω (30W),670Ω (15W), 3.3kΩ (3W) 70V line: 83Ω (60W), 170Ω (30W), 330Ω(15W), 670Ω(7.5W), 3.3kΩ(1.5W) 25V line: 83Ω (7.5W), 170Ω (3.7W), 330Ω (1.9W), 670Ω (0.9W), 3.3kΩ (0.2W)	16Ω, 8Ω; 100V line: 330Ω (30W), 1kΩ (10W), 3.3kΩ (3W), 10kΩ (1W) 70V line: 170Ω (30W), 330Ω (15W),1kΩ (5W), 3.3kΩ (1.5W),10kΩ (0.5W) 25V Line: 170Ω (3.7 W), 330Ω (1.9W), 1kΩ (0.6W), 3.3kΩ (0.2W), 10kΩ (0.06W)		
Sensitivity	91dB (1W, 1m)	90dB (1W, 1m)		
Frequency Response	60Hz – 20kHz (–10dB), 45Hz – 20kHz (–20dB) at installation in 1/2 free sound field (measured by installing the unit in the center of a ceiling.)	70Hz – 20kHz (–10dB), 50Hz – 20kHz (–20dB) at installation in 1/2 free sound field (measured by installing the unit in the center of a ceiling.)		
Speaker Component	High frequency: Dome- type Low frequency: 16cm cone-type	12cm cone-type	High frequency: Balanced dome-type Low frequency: 12cm cone-type	12cm cone-type
Mounting Hole	ø250mm (max. ceiling thickness: 37mm)	ø200mm (max. ceiling thickness: 37mm)		
Input Terminal	Removable locking connector with screw-down terminals (2 input terminals and 2 bridge terminals)			
Usable Cable	Solid copper wire: ø0.5 – ø1.6mm (equivalent to AWG No. 24 – 14), Stranded copper wire: 0.2 – 2.5mm <sup>2</sup> (equivalent to AWG No. 24 – 14)			
Finish	Enclosure: Steel plate, plating; Baffle: Fire-resistant ABS resin (resin material grade: UL-94 V-0), black Rim: Fire-resistant ABS resin (resin material grade: UL-94 V-0), white, paint; Punched Net: Steel plate, white, paint			
Dimensions	ø280 x 227 (D) mm	ø230 x 200 (D) mm	ø230 x 229 (D) mm	
Weight	5.1kg (including mounting accessories)	3.7kg (including mounting accessories)		
Accessory	Panel x 1, Ceiling reinforcement ring x 1, Safety wire x 1, Paper Pattern x 1			
Option	Anchor hanging bracket: HY-AH1 Tile bar bridge: HY-TB1	Anchor hanging bracket: HY-AH1, Back can: HY-BC1 Tile bar bridge: HY-TB1, Trim ring: HY-TR1		Anchor hanging bracket: HY-AH1, Back can: HY-BC1, Tile bar bridge: HY-TB1, Trim ring: HY-TR1, Digital processor: DP-SP3



## »» 60W Ceiling Subwoofer FB-2862C-EA



Model	FB-2862C
Enclosure	Bass reflex type
Rated Input	60W (High Impedance)
Power Handling Capacity	Continuous: 60W (8Ω) (IEC60268-5) Program: 120W (8Ω)
Rated Impedance	100V line : 170Ω (60W), 330Ω (30W), 670Ω (15W), 3.3kΩ (3W) 70V line : 83Ω (60W), 170Ω (30W), 330Ω (15W), 670Ω (7.5W), 3.3kΩ (1.5W) 25V line : 83Ω (7.5W), 170Ω (3.7W), 330Ω (1.9W), 670Ω (0.9W), 3.3kΩ (0.2W) 8Ω (120W)
Sensitivity	87dB (1W, 1m) installation in 1/2 free sound field (Measured by installing the unit in the center of a ceiling or wall) 81 dB (1W, 1m) installation in free sound field (Measured in an echoic chamber)
Frequency Response	60 - 250Hz (-10dB) Installation in 1/2 free sound field (Measured by installing the unit in the center of a ceiling or wall)
Speaker Component	Low frequency : 16 cm cone-type
Mounting Hole	ø250 mm (Maximum ceiling thickness: 37 mm)
Input Terminal	Removable locking connector with screw-down terminals (2 input terminals and 2 bridge terminals)
Usable Cable	Solid copper wire: ø0.5 - ø1.6 mm (equivalent to AWG No. 24 -14) Stranded copper wire: 0.2 - 2.5 mm (equivalent to AWG No. 24 -14)
Finish	Enclosure: Steel plate, plating, Baffle: Fire-resistant ABS resin (UL-94 V-0), black, Rim: Fire-resistant ABS resin (UL-94 V-0), white (RAL 9016), Punched net: Steel plate, white (RAL 9016), paint
Dimensions	ø280 x 198 (D) mm [ø11" x 7.79"]
Weight	6.3kg (including mounting accessory)
Accessory	Grille... 1, Ceiling reinforcement... 1, Safety wire... 1, Paper pattern... 1
Option	Anchor hanging bracket: HY-AH1, Tile bar bridge: HY-TB1

## »» Back Can HY-BC1




**Finish:** Surface-treated steel plate, t0.8, black, paint  
**Weight:** 1.5kg  
**Accessory:** Rubber grommet x 2

## »» Trim Ring HY-TR1



**Ceiling Hole Diameter:** ø200 - ø300mm  
**Finish:** Surface-treated steel plate, white, paint  
**Weight:** 500g

## »» Tile Bar Bridge HY-TB1



**Finish:** Steel plate, plating  
**Weight:** 500g (for set of 2 bars)

## »» Anchor Hanging Bracket HY-AH1



**Finish:** Steel plate, plating  
**Weight:** 700g  
**Accessory:** Paper pattern x 1

## »» Reinforcement Ring HY-RR1



**Ceiling Hole Diameter:** ø135mm  
**Finish:** Surface-treated steel plate  
**Weight:** 80g

## »» Reinforcement Ring HY-RR2



**Ceiling Hole Diameter:** ø200mm  
**Finish:** Surface-treated steel plate  
**Weight:** 280g

# Speakers (Commercial Sound)

## Column Speakers

### » Column Speaker

#### TZ-206BWP-EA / TZ-206WWP-EA



Model	TZ-206BWP-EA / TZ-206WWP-EA
Enclosure	Sealed Type
Rated Input	20W
Rated Impedance	100V line: 500Ω (20W), 1kΩ (10W), 2kΩ (5W), 4kΩ (2.5W) 70V line: 500Ω (10W), 1kΩ (5W), 2kΩ (2.5W), 4kΩ (1.3W)
Sensitivity	89dB (1W, 1m)
Frequency Response	150Hz - 13kHz
Speaker Component	10cm cone-type x 2, waterproof
Input Terminal	Push-in terminal
Finish	Enclosure Punched Net
	HIPS, black/white paint Surface-treated steel plate, black/white anti-rust paint
Speaker Bracket Joint/Wall Bracket	Aluminum die-cast, black paint Steel plated, t1.6, black, paint (ED coating)

Operating Temperature	-10°C to +50°C
Dust/Water Protection	IP65
Dimensions	135 (W) x 250 (H) x 128 (D) mm
Weight	1.9kg
Accessory	Speaker bracket x1, Joint bracket x1, Wall bracket x1, Fixing bolt (M5x60) x1, Hexagon bolt (M6x12, with plain washer and spring washer) x2, Machine screw (M5x20, with plain washer and spring washer) x2, Hexagon bolt (M8x15) x1, Terminal cover x1, Tapping screw x4
Option	Speaker Stand: ST-16A

### » Column Speaker

#### TZ-406BWP-EA / TZ-406WWP-EA



Model	TZ-406BWP-EA / TZ-406WWP-EA
Enclosure	Sealed Type
Rated Input	40W
Rated Impedance	100V line: 250Ω (40W), 500Ω (20W), 1kΩ (10W), 2kΩ (5W) 70V line: 250Ω (20W), 500Ω (10W), 1kΩ (5W), 2kΩ (2.5W)
Sensitivity	92dB (1W, 1m)
Frequency Response	150Hz - 13kHz
Speaker Component	10cm cone-type x 4, waterproof
Input Terminal	Push-in terminal
Finish	Enclosure Punched Net
	HIPS, black/white paint Surface-treated steel plate, black/white anti-rust paint
Speaker Bracket Joint/Wall Bracket	Aluminum die-cast, black paint Steel plated, t1.6, black, paint (ED coating)

Operating Temperature	-10°C to +50°C
Dust/Water Protection	IP65
Dimensions	135 (W) x 498 (H) x 128 (D) mm
Weight	3.5kg
Accessory	Speaker bracket x1, Joint bracket x1, Wall bracket x1, Fixing bolt (M5x60) x1, Hexagon bolt (M6x12, with plain washer and spring washer) x2, Machine screw (M5x20, with plain washer and spring washer) x2, Hexagon bolt (M8x15) x1, Terminal cover x1, Tapping screw x4
Option	Speaker Stand: ST-16A

### » Column Speaker

#### TZ-606BWP-EA / TZ-606WWP-EA



Model	TZ-606BWP-EA / TZ-606WWP-EA
Enclosure	Sealed Type
Rated Input	60W
Rated Impedance	100V line: 170Ω (60W), 330Ω (30W), 670Ω (15W), 1.3kΩ (7.5W) 70V line: 170Ω (30W), 330Ω (15W), 670Ω (7.5W), 1.3kΩ (3.8W)
Sensitivity	94dB (1W, 1m)
Frequency Response	150Hz - 13kHz
Speaker Component	10cm cone-type x6, waterproof
Input Terminal	Push-in terminal
Finish	Enclosure Punched Net
	HIPS, black/white paint Surface-treated steel plate, black/white anti-rust paint
Speaker Bracket Joint/Wall Bracket	Aluminum die-cast, black paint Steel plated, t1.6, black, paint (ED coating)

Operating Temperature	-10°C to +50°C
Dust/Water Protection	IP65
Dimensions	135 (W) x 746 (H) x 128 (D) mm
Weight	5.5kg
Accessory	Speaker bracket x1, Joint bracket x1, Wall bracket x1, Fixing bolt (M5x60) x1, Hexagon bolt (M6x12, with plain washer and spring washer) x2, Machine screw (M5x20, with plain washer and spring washer) x2, Hexagon bolt (M8x15) x1, Terminal cover x1, Tapping screw x4
Option	Speaker Stand: ST-16A

### » Speaker Stand

#### ST-16A

**Effective Extensible Length:** 1130 - 1660mm

**Load Capacity:** 7kg (static load)

**Finish:** Stand: Aluminum, silver, matte finish;

Speaker mounting bracket: Polyamide resin, black

**Weight:** 1.7kg (bracket included)

**Accessory:** Speaker mounting screw (M5 x 20)

x2, Hexagon headed bolt (M8 x 20) x1,

Washer x1, Spacer x1, Butterfly nut x1



## Box Speakers

### Wall Mount Box Speakers

#### » Wall Mount Box Speaker

**BS-680F**

**BS-680FC**



Model	BS-680F	BS-680FC
<b>Rated Input</b>	6W (100V line), 3W (70V line)	
<b>Rated Impedance</b>	100V line: 1.7kΩ (6W), 3.3kΩ (3W), 6.7kΩ (1.5W), 13kΩ (0.8W), 70V line: 1.7kΩ (3W), 3.3kΩ (1.5W), 6.7kΩ (0.8W), 13kΩ (0.4W)	
<b>Sensitivity</b>	94dB (1W, 1m) (500Hz – 5kHz, pink noise)	94dB (1W, 1m) (500Hz – 5kHz, pink noise) 77dB (1W, 4m) (100Hz - 10kHz, pink noise) according to EN 54-24 89dB (1W, 1m) (100Hz - 10kHz, pink noise) converted based on EN 54-24
<b>Max. Sound Pressure Level</b>	-	84dB (6W, 4m) (100Hz - 10kHz, pink noise) according to EN 54-24 96dB (6W, 1m) (100Hz - 10kHz, pink noise) converted based on EN 54-24
<b>Frequency Response</b>	150Hz – 20kHz (peak -20dB)	150Hz – 20kHz
<b>Coverage Angle (-6dB)</b>	-	500Hz: 180°, 1kHz: 140° (horizontal and vertical) 2kHz: 120° (horizontal), 110° (vertical) 4kHz: 100° (horizontal), 80° (vertical) according to EN 54-24
<b>Environmental Type</b>	-	A (indoor applications) according to EN 54-24
<b>Speaker Component</b>	16cm (6") double cone-type	
<b>Applicable Cable</b>	Solid wire: ø0.8 – ø1.6mm (AWG 20 – 14) 7-core twisted wire: 0.75 – 1.25mm <sup>2</sup> (AWG 18 – 16)	Solid wire: ø1.0 – ø3mm (AWG 18 – 9)
<b>Connection</b>	Push-in connector (bridging terminal)	Screw connector (steatite terminal x 2) bridging
<b>Finish</b>	Baffle, Cabinet: Steel plate, off-white (RAL 9010 or equivalent colour); Grille: Surface-treated steel plate net, off-white (RAL 9010 or equivalent colour)	
<b>Dimensions</b>	310 (W) x 190 (H) x 90 (D) mm	310 (W) x 190 (H) x 87.2 (D) mm
<b>Weight</b>	2.6kg	
<b>Accessory</b>	Rubber grommet x 2, Speaker mounting screw (4 x 16) x 4	

#### » Wall Mount Box Speaker

**BS-678 / BS-678T /  
BS-678B / BS-678BT**



Model	BS-678	BS-678T	BS-678B	BS-678BT
Rated Input	6W (100V line), 3W (70V line)			
Rated Impedance	100V line: 1.7kΩ (6W), 3.3kΩ (3W), 6.7kΩ(1.5W), 13kΩ (0.8W) 70V line: 1.7kΩ (3W), 3.3kΩ (1.5W), 6.7kΩ(0.8W), 13kΩ (0.4W)			
Sensitivity	94dB (1W, 1m) (500Hz – 5kHz, pink noise)			
Frequency Response	150Hz – 20kHz (peak –20dB)			
Speaker Component	16cm (6") double cone-type			
Applicable Cable	600V vinyl-insulated cable (IV wire or HIV wire), Solid wire: ø0.8 – ø1.6mm (equivalent to AWG 20 – 14) 7-core twisted wire: 0.75 – 1.25mm² (equivalent to AWG 18 – 16)			
Connection	Push-in connector (bridging terminal)			
Attenuation	-	OFF, 1(-12dB), 2(-6dB), 3(0dB)	-	OFF, 1(-12dB), 2(-6dB), 3(0dB)
Finish	Baffle: HIPS resin, off-white Cabinet: Particle board with pvc sheet, off-white Grille: Surface-treated steel plate net, off-white (RAL 9010 or equivalent color)		Baffle: HIPS resin, black Cabinet: Particle board with pvc sheet, black Grille: Surface-treated steel plate net, black (RAL 9011 or equivalent color)	
Dimensions	250 (W) × 190 (H) × 110 (D) mm (excluding volume control knob)			
Weight	1.7kg			
Accessory	Speaker mounting screw (4 × 35) × 2			

#### » Wall Mount Box Speaker

**BS-1006**



Model	BS-1006
<b>Rated Input</b>	6W (100 V line), 3W (70 V line)
<b>Rated Impedance</b>	100V line: 1.7kΩ (6W), 3.3kΩ (3W), 10kΩ (1W) 70V line: 1.7kΩ (3W), 3.3kΩ (1.5W), 10kΩ (0.5W)
<b>Sensitivity</b>	91dB at 1W, 1m
<b>Frequency Response</b>	120Hz – 15kHz
<b>Speaker Components</b>	12 cm (5") cone-type speaker
<b>Applicable Cable</b>	Solid copper wire: Φ0.8-Φ1.6 mm (AWG 20-14) 7-core twisted copper wire: 0.75 -1.25 mm <sup>2</sup> (AWG 18-16)

<b>Connection</b>	Push-in connector (bridging terminal)
<b>Operating Temperature</b>	-10°C to +50°C
<b>Finish</b>	Case: HIPS resin, Traffic White Rear board: HIPS resin, Primary color
<b>Dimensions</b>	172.3 (W) x 192.6 (H) x 103.3 (D) mm
<b>Wall Mounting Dimensions</b>	Case front mount: 184mm Fixing hole mount: 120mm
<b>Weight</b>	780 g
<b>Accessory</b>	Speaker mounting screw (4 x 25) ... 2, Speaker mounting screw (4 x 35) ... 2

>>>
 Wall Mount Box Speaker

BS-634 / BS-634T /  
 BS-1034 / BS-1034S



Model	BS-634	BS-634T	BS-1034	BS-1034S
Rated Input	6W		10W	
Rated Impedance	100V line: 1.7kΩ (6W), 3.3kΩ (3W); 70V line: 1.7kΩ (3W), 3.3kΩ (1.5W)	100V line: 1.7kΩ (6W) 70V line: 1.7kΩ (3W)	100V line: 1kΩ (10W), 2kΩ (5W), 3.3kΩ (3W), 10kΩ (1W), 70V line: 500Ω (10W), 1kΩ (5W), 2kΩ (2.5W), 3.3kΩ (1.5W), 10kΩ (0.5W)	
Sensitivity	90dB (1W, 1m)			
Frequency Response	120Hz – 18kHz		120Hz – 20kHz	
Speaker Component	12cm (5") cone-type		Low frequency: 12cm (5") cone-type, High frequency: Balanced dome-type	
Input Connector	M4 screw terminal, distance between barriers: 11mm			
Attenuation	-	OFF (NC), 1 (-12dB), 2 (-6dB), 3 (0dB)	-	-
Finish	Enclosure: HIPS resin (fire resistant grade UL94 V-0 or its equivalent), off-white (RAL 9010 or equivalent colour) Net: Surface-treated steel plate, off-white (RAL 9010 or equivalent colour), paint			Enclosure: HIPS resin (fire resistant grade UL94 V-0 or its equivalent), silver Net: Steel plate, silver, paint
Dimensions	210 (W) × 330 (H) × 80 (D) mm			
Weight	1.3kg		1.4kg	
Accessory	Speaker receptacle × 1, Wall mounting screw × 2			

Universal Speakers

>>>
 Universal Speaker

BS-1030B / BS-1030W



Model	BS-1030B	BS-1030W
Enclosure	2-way bass-reflex type	
Rated Input	30W	
Impedance	8Ω, 100V line: 330Ω (30W), 500Ω (20W), 670Ω (15W), 1kΩ (10W), 2kΩ (5W) 70V line: 170Ω (30W), 250Ω (20W), 330Ω (15W), 500Ω (10W), 1kΩ (5W)	
Sensitivity	90dB (1W, 1m)	
Frequency Response	80Hz – 20kHz	
Speaker Component	12cm cone-type + dome-type	
Speaker Cable	2-core cabtyre cable (diameter 6mm)	
Operating Temperature	-10°C to +50°C	
Water Protection	IP-X4 (can be installed vertically or horizontally*)	
Finish	Enclosure Net  Bracket	ABS resin, white (RAL9010 PURE WHITE), paint Surface-treated steel plate, white (RAL9010 PURE WHITE), powder coating Surface-treated steel plate, white (RAL9010 PURE WHITE), powder coating
Dimensions	196 (W) x 290 (H) x 150 (D) mm (unit only)	
Weight	2.5kg (unit only)	
Accessory	Bracket x 1, Bracket mounting screw x 2, Bracket mounting washer x 2	
Option	Applicable bracket: WCB-13B, SP-410 ; Applicable stand: ST-16A	Mounting bracket: SP-420 ; Applicable bracket: WCB-13W, SP-410 ; Applicable stand: ST-16A

\* Install with the front facing downward. Note that the splash-proof capability will be lost if installed face-up. The logo mark needs to be located in the lower section when the speaker is installed vertically, and on the right side of the speaker (as viewed from the front) when installed horizontally.

>>>
 Universal Speaker

BS-1110W / BS-1120W



Model	BS-1110W	BS-1120W
Rated Input	10W	20W
Rated Impedance	100V line: 1kΩ (10W), 2kΩ (5W) 70V line: 500Ω (10W), 1kΩ (5W), 4Ω (10W)	100V line: 500Ω (20W), 1kΩ (10W) 70V line: 250Ω (20W), 500Ω (10W), 8Ω (20W)
Sensitivity	92dB (1W, 1m)	95dB (1W, 1m)
Frequency Response	150Hz – 14kHz	150Hz – 20kHz
Speaker Component	12cm cone-type x 2	12cm cone-type x 4 + Balanced dome-type x 1
Applicable Cable	600V vinyl-insulated cable (IV wire or HIV wire) Solid copper wire: ø0.8 – ø1.2mm 7-core twisted copper wire: 0.75 – 1.25mm²	
Connection	Push-in connector (Bridging connections possible)	
Operating Temperature	-10°C to +50°C	
Finish	Enclosure: Plywood vinyl coating, white (RAL9010 PURE WHITE) Front: ABS resin, white (RAL9010 PURE WHITE), paint Rear: Steel plate, white (RAL9010 PURE WHITE), paint	
Dimensions	180 (W) x 360 (H) x 100 (D) mm	180 (W) x 720 (H) x 100 (D) mm
Weight	2.9kg (unit only)	5.1kg (unit only)
Accessory	Mounting bracket x 2	
Option	Applicable bracket: YS-301, SP-410, WCB-13W Applicable stand: ST-16A	Applicable bracket: YS-301

## Plane Wave Speakers

### Compact Double-Sided Radiation Plane Wave Speaker

#### PW-1230DB / PW-1230DW

### Compact Single-Sided Radiation Plane Wave Speaker

#### PW-1230SB / PW-1230SW



Model	PW-1230DB	PW-1230DW	PW-1230SB	PW-1230SW
Type of Radiation	Double-sided radiation (Front, the side with TOA logo affixed: Positive pressure wave, Rear: Negative pressure wave)		Single-side radiation	
Rated Input	30W			
Rated Impedance	High impedance 100V line: 330Ω (30W), 670Ω (15W), 1kΩ (10W), 2kΩ (5W) High impedance 70V line: 170Ω (30W), 330Ω (15W), 670Ω (7.5W), 1kΩ (5W), 2kΩ (2.5W)			
Sensitivity	86dB (1W,1m equivalent measured at 4m, 1 – 10kHz) 86dB (1W, measured at 1m, 1 – 10kHz) (Beam tilting : FLAT, High pass filter: OFF)		87dB (1W, 1m equivalent measured at 4m,1 – 10kHz) 87dB (1W, measured at 1m, 1 – 10kHz) (Beam tilting : FLAT, High pass filter: OFF)	
Frequency Response	300Hz – 17.5kHz (Beam tilting : FLAT, High pass filter: OFF)		450Hz – 17.5kHz (Beam tilting : FLAT, High pass filter: OFF)	
Directivity Angle	Horizontal: 38° (2kHz, 1/3 octave band), Vertical: 75° (2kHz, 1/3 octave band)			
Speaker Unit	Plane wave unit (152 × 214mm) × 2			
Setting Switch	Beam tilting (radiation direction) FLAT: 0° downward, DOWNWARD: 5° downward, High pass filter (450Hz, -12dB/oct): OFF/ON			
Speaker Cord	ø9mm, 6-core cabtyre cable, 2m			
Water Protection	IPX4			
Operating Temperature	-10°C to +50°C			
Finish	Enclosure, Punched net and Mounting bracket: Stainless, black, semi-gloss, paint	Enclosure, Punched net and Mounting bracket: Stainless, light ivory, semi-gloss, paint	Enclosure, Punched net and Mounting bracket: Stainless, black, semi-gloss, paint	Enclosure, Punched net and Mounting bracket: Stainless, light ivory, semi-gloss, paint
Dimensions	524 (W) × 355 (H) × 60 (D) mm (including mounting bracket)			
Weight	7.3kg (including mounting bracket)		7.8kg (including mounting bracket)	

### Large Double-Sided Radiation Plane Wave Speaker

#### PW-1430DB / PW-1430DW

### Large Single-Sided Radiation Plane Wave Speaker

#### PW-1430SB / PW-1430SW



Model	PW-1430DB	PW-1430DW	PW-1430SB	PW-1430SW
Type of Radiation	Double-sided radiation (Front, the side with TOA logo affixed: Positive pressure wave, Rear: Negative pressure wave)		Single-side radiation	
Rated Input	30W			
Rated Impedance	High impedance 100V line: 330Ω (30W), 670Ω (15W), 1kΩ (10W), 2kΩ (5W) High impedance 70V line: 170Ω (30W), 330Ω (15W), 670Ω (7.5W), 1kΩ (5W), 2kΩ (2.5W)			
Sensitivity	88dB (1W, equivalent measured at 4m, 1 – 10kHz) 85dB (1W, measured at 1m, 1 – 10kHz) (Beam tilting : FLAT, High pass filter: OFF)		90dB(1W, equivalent measured at 4m, 1 – 10kHz) 87dB (1W, measured at 1m, 1 – 10kHz) (Beam tilting : FLAT, High pass filter: OFF)	
Frequency Response	250Hz – 17.5kHz (Beam tilting: FLAT, High pass filter: OFF)		400Hz – 17.5kHz (Beam tilting: FLAT, High pass filter: OFF)	
Directivity Angle	Horizontal: 19° (2kHz, 1/3 octave band), Vertical: 78° (2kHz, 1/3 octave band)			
Speaker Unit	Plane wave unit (152 × 214 mm) × 4			
Setting Switch	Beam tilting (radiation direction) FLAT: 0° downward, DOWNWARD: 5° downward, High pass filter (450Hz, -12dB/ oct) : OFF/ ON			
Speaker Cord	ø9mm, 6-core cabtyre cable, 2m			
Water Protection	IPX4			
Operating Temperature	-10°C to +50°C			
Finish	Enclosure, Punched net and Mounting bracket: Stainless, black, semi-gloss, paint	Enclosure, Punched net and Mounting bracket: Stainless, light ivory, semi-gloss, paint	Enclosure, Punched net and Mounting bracket: Stainless, black, semi-gloss, paint	Enclosure, Punched net and Mounting bracket: Stainless, light ivory, semi-gloss, paint
Dimensions	831 (W) × 355 (H) × 60 (D) mm (including mounting bracket)			
Weight	11.4kg (including mounting bracket)		11.9kg (including mounting bracket)	



# Interior Design Speakers

## Pendant Speakers

»» Pendant Speaker

### PE-64 / PE-304



Model	PE-64	PE-304
<b>Enclosure</b>	Bass-reflex type	
<b>Rated Input</b>	6W (100V line), 3W (70V line)	30W (100V, 70V line, 8Ω)
<b>Rated Impedance</b>	100V line: 1.7kΩ (6W), 3.3kΩ (3W), 10kΩ (1W) 70V line: 1.7kΩ (3W), 3.3kΩ (1.5W), 10kΩ (0.5W)	8Ω; 100V line: 330Ω (30W), 500Ω (20W), 670Ω (15W), 1kΩ (10W), 2kΩ (5W) 70V line: 170Ω (30W), 250Ω (20W), 330Ω (15W), 500Ω (10W), 1kΩ (5W)
<b>Sensitivity</b>	90dB (1W, 1m) (500Hz – 5kHz, pink noise)	91dB (1W, 1m) (500Hz – 5kHz, pink noise)
<b>Frequency Response</b>	100Hz – 18kHz (peak –20dB)	70Hz – 20kHz (peak –20dB)
<b>Speaker Component</b>	12cm (5") cone-type	12cm (5") cone-type + balanced dome tweeter
<b>Speaker Cord</b>	2-core cabtyre cord 5m	
<b>Applicable Cable</b>	600V vinyl-insulated cable (IV wire or HIV wire), Solid copper wire: ø0.8 – ø1.6mm (equivalent to AWG 20 – 14) 7-core twisted copper wire: 0.75 – 1.25mm <sup>2</sup> (equivalent to AWG 18 – 16)	
<b>Connection</b>	Push-in connector (bridging terminal-2 branch type)	
<b>Finish</b>	Enclosure: HIPS resin, off-white (RAL 9010 or equivalent colour) Grille: Surface-treated steel plate net, off-white (RAL 9010 or equivalent colour), paint	
<b>Dimensions</b>	ø186 × 251(H) mm (unit only)	
<b>Weight</b>	1.5kg (unit only)	2.1kg (unit only)
<b>Accessory</b>	Ceiling bracket × 1, Mounting hanger × 1, Ceiling cover × 1, Speaker mounting screw (4 × 16) × 4	

»» Projection Speaker

### PJ-64 / PJ-304



Model	PJ-64	PJ-304
<b>Enclosure</b>	Bass-reflex type	
<b>Rated Input</b>	6W (100V line), 3W (70V line)	30W (100V, 70V line, 8Ω)
<b>Rated Impedance</b>	100V line: 1.7kΩ (6W), 3.3kΩ (3W), 10kΩ(1W) 70V line: 1.7kΩ (3W), 3.3kΩ (1.5W), 10kΩ (0.5W)	8Ω; 100V line: 330Ω (30W), 500Ω (20W), 670Ω (15W), 1kΩ (10W), 2kΩ (5W) 70V line: 170Ω (30W), 250Ω (20W), 330Ω (15W), 500Ω (10W), 1 kΩ (5W)
<b>Sensitivity</b>	90dB (1W, 1m) (500Hz – 5kHz, pink noise)	91dB (1W, 1m) (500Hz – 5kHz, pink noise)
<b>Frequency Response</b>	100Hz – 18kHz (peak –20dB)	70Hz – 20kHz (peak –20dB)
<b>Speaker Component</b>	12cm (5") cone-type	12cm (5") cone-type + balanced dome tweeter
<b>Speaker Cord</b>	2-core cabtyre cord 60 cm (diameter 6mm)	
<b>Finish</b>	Enclosure: HIPS resin, off-white (RAL 9010 or equivalent colour) Grille: Surface-treated steel plate net, off-white (RAL 9010 or equivalent colour), paint	
<b>Dimensions</b>	ø186 × 369 (H) mm	
<b>Weight</b>	1.5kg (unit only)	2.1kg (unit only)
<b>Accessory</b>	Swivel bracket × 1, Speaker mounting screw (4 × 16) × 3	

»» Projection Speaker

### PJ-100W / PJ-200W



Model	PJ-100W	PJ-200W
<b>Rated Input</b>	10W (50V, 70V, 100V Line)	20W (50V, 70V, 100V Line)
<b>Rated Impedance</b>	100V Line : 1kΩ (10W), 2kΩ (5W), 4kΩ (2.5W) 70V Line: 500Ω (10W), 1kΩ (5W), 2kΩ (2.5W), 4kΩ (1.25W) 50V Line: 250Ω (10W), 500Ω (5W), 1kΩ (2.5W), 2kΩ (1.25W), 4kΩ (0.63W)	100V Line : 500Ω (20W), 1kΩ (10W), 2kΩ (5W) 70V Line: 250Ω (20W), 500Ω (10W), 1kΩ (5W), 2kΩ (2.5W) 50V Line: 125Ω (20W), 25Ω (10W), 500Ω (5W), 1kΩ (2.5W), 2kΩ (1.25W)
<b>Preset Impedance</b>	1kΩ	500Ω
<b>Sensitivity</b>	92dB (1m, 1W) at 1kHz	95dB (1m, 1W) at 1kHz
<b>Speaker Diameter</b>	12cm	16cm
<b>Frequency Response</b>	65Hz – 15kHz	50Hz – 20kHz
<b>Finish</b>	Cabinet, Cover: ABS resin, off-white; Bracket : SPCC, off-white	
<b>Dimensions</b>	160 (W) × 200 (H) × 195 (D) mm	200 (W) × 255 (H) × 250 (D) mm
<b>Weight</b>	1.8kg	2.5kg

Note: Avoid installing the speaker in locations which vibrate considerably or under environments easy to be oil-contaminated.

# Ceiling Speakers

## Flush Mount Ceiling Speakers

### »» Ceiling Mount Speaker

#### PC-1860S



Model	PC-1860S
Rated Output	6 W (100 V Line), 3 W (70 V Line)
Rated Impedance	100 V line: 1.7 kΩ (6 W), 3.3 kΩ (3 W), 6.7 kΩ (1.5 W), 13 kΩ (0.8 W) 70 V line: 1.7 kΩ (3 W), 3.3 kΩ (1.5 W), 6.7 kΩ (0.8 W), 13 kΩ (0.4 W)
Sensitivity	94 dB (1 W, 1 m) (500 Hz - 5 kHz, pink noise)
Frequency Response	80 Hz - 20 kHz (peak -20 dB)
Speaker Component	12 cm (5") cone-type
Dimensions for Fixing Hole	Mounting hole: $\phi 150 \pm 3$ mm (5.91" $\pm$ 0.12") Ceiling thickness: 5 - 25 mm (0.2" - 0.98")
Speaker Mounting Method	Spring Catch

Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)
Applicable Cable	Solid wire: 0.5 - 3 mm <sup>2</sup> (AWG 20 - 12)
Connection	Push wire connection (Bridging terminal - 2 branch type)
Finish	Frame: Steel plate, white (RAL 9016 equivalent), paint Grille: Steel net, white (RAL 9016 equivalent), paint Mounting bracket: Steel plate, plating
Dimensions	$\phi 180 \times 5$ (exposed section) + 101 (D) mm
Weight	750 g (1.65 lb)
Accessory	Paper pattern ...1

### »» Surface Mount Ceiling Speaker

#### PC-1868HK2

#### PC-1868SW2



Model	PC-1868HK2	PC-1868SW2
Rated Input	6W (for 100 V line), 3W (for 70 V line)	
Rated Impedance	100 V line: 1.7 kΩ (6W), 3.3 kΩ (3W), 10 kΩ (1W), Internal wiring must be changed 70 V line: 1.7kΩ (3W), 3.3kΩ (1.5W), 10 kΩ (0.5 W), Internal wiring must be changed	
Sensitivity	90 dB (1W, 1m) (330Hz - 3.3kHz, pink noise)	
Frequency Response	100Hz - 16kHz	
Speaker Component	12cm (5") cone-type	
Dimensions for Fixing Hole	$\phi 150$ (mounting hole) $\times$ 50mm (maximum ceiling thickness)	
Speaker Mounting Method	Spring catch	
Finish	Baffle: ABS resin, off-white (RAL9010 or equivalent color) Grille: Steel net, off-white (RAL9010 or equivalent color), paint	Baffle: ABS resin, signal-white (RAL 9003 or equivalent color) Grille: Steel net, signal-white (RAL 9003 or equivalent color), paint
Dimensions	$\phi 180 \times 11$ (exposed section) + 110 (D) mm	
Weight	740g (bracket included)	
Accessory	600 V Vinyl-insulated cable (IV wire or HIV wire) Solid copper wire: $\phi 0.8$ - $\phi 1.2$ mm 7-core twisted copper wire: 0.75 - 1.25 mm <sup>2</sup>	

### »» Metal Back Can

#### Q-BC1868

Dimensions:  $\phi 151$ -152 x 85(H) mm



### »» Ceiling Mount Speaker

#### PC-2360



Model	PC-2360
Rated Output	6 W (100 V Line), 3 W (70 V Line)
Rated Impedance	100 V line: 1.7 kΩ(6 W), 3.3 kΩ (3 W), 6.7 kΩ (1.5 W), 13 kΩ (0.8 W) 70 V line: 1.7 kΩ(3 W), 3.3 kΩ (1.5 W), 6.7 kΩ (0.8 W), 13 kΩ (0.4 W)
Sensitivity	94 dB (1 W, 1 m) (500 Hz - 5 kHz, pink noise)
Frequency Response	60 Hz - 20 kHz (peak -20 dB)
Speaker Component	16 cm (5") cone-type
Dimensions for Fixing Hole	Mounting hole: $\phi 200 \pm 3$ mm (7.87" $\pm$ 0.12") Ceiling thickness: 5 - 25 mm (0.2" - 0.98")
Speaker Mounting Method	Spring Clamp

Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)
Applicable Cable	Solid wire: 0.5 - 3 mm <sup>2</sup> (AWG 20 - 12)
Connection	Push wire connection (Bridging terminal - 2 branch type)
Finish	Frame: Steel plate, white (RAL 9016 equivalent), paint Grille: Steel net, white (RAL 9016 equivalent), paint
Dimensions	$\phi 230 \times 76$ (D) mm (9.06" $\times$ 2.99")
Weight	740 g (1.63 lb)
Accessory	Paper pattern x1

## » Surface Mount Ceiling Speaker

# PC-2668 PC-2268 PC-2268WP



Model	PC-2668	PC-2268	PC-2268WP
Rated Input	6W (for 100V Line), 3W (for 70V Line)		
Rated Impedance	100V line: 1.7kΩ (6W), 3.3kΩ (3W), 6.7kΩ (1.5W)*, 13kΩ (0.8W)* 70V line: 1.7kΩ (3W), 3.3kΩ (1.5W), 6.7kΩ (0.8W)*, 13kΩ (0.4W)* * Internal wiring must be changed.	100V line: 1.7kΩ (6W), 3.3kΩ (3W), 6.7kΩ (1.5W), 13kΩ (0.8W) 70V line: 1.7kΩ (3W), 3.3kΩ (1.5W), 6.7kΩ (0.8W), 13kΩ (0.4W)	
Sensitivity	90dB (1W, 1m) (330Hz – 3.3kHz Pink noise)		
Frequency Response	100Hz – 16kHz	160Hz – 14kHz (20dB below peak)	160Hz – 16kHz (20dB below peak)
Speaker Component	12cm (5") dynamic cone-type speaker	12cm (5") cone-type	
Mounting Method	Spring catch	-	-
Applicable Cable	600V Vinyl-insulated cable (IV wire or HIV wire) Solid copper wire: ø0.8 – ø1.2mm 7-core twisted copper wire: 0.75 – 1.25mm²	600V vinyl-insulated cable (IV wire or HIV wire) Solid copper wire: ø0.8 – ø1.6mm (equivalent to AWG 20 – 14) 7-core twisted copper wire: 0.75 – 1.25mm² (equivalent to AWG 18 – 16)	
Connction	Push-in connector (Bridging terminal-2 branch type)	Push-in connector (bridging terminal)	
Operating Temperature	-	-10°C to +50°C	
Water Protection	-	-	IPX4 (conforms when the unit is installed to a flat horizontal ceiling)
Finish	Baffle: ABS resin, off-white (RAL9010 or equivalent color)	Front case, Rear case: Fire-resistant HIPS resin (resin material grade: UL-94 V-0), light gray	Front case, Rear case: Fire-resistant HIPS resin (resin material grade: UL-94 V-0 or its equivalent), light gray Speaker mounting bracket: Surface-treated steel plate, off-white, powder coating
Dimensions	ø260 x 92 (D) mm (Exposed section)	ø220 x 80.5 (D) mm (excluding projection)	ø220 x 80.5 (D) mm (excluding projection) ø150 x 5 (D) mm (speaker mounting panel, excluding mounting screw)
Weight	820g (Bracket included)	880g	890g (unit only), 180g (speaker mounting panel)
Accessory	-	Switch box mounting screw (M4 x 35) x 2, Ceiling mounting screw (4 x 35) x 2,	Speaker mounting panel x 1, Switch box mounting screw (M4 x 35) x 2, Ceiling mounting screw (4 x 35) x 2, Knob nut x 2

## » Flush Mount Ceiling Speaker

# PC-2869 / PC-2852



Model	PC-2869	PC-2852
<b>Rated Input</b>	6W (100V line), 3W (70V line)	15W (100V line, 70V line)
<b>Rated Impedance</b>	100V line: 1.7kΩ (6W), 3.3kΩ (3W), 6.7kΩ (1.5W), 13kΩ (0.8W) 70V line: 1.7 kΩ (3W), 3.3kΩ (1.5W), 6.7 kΩ (0.8W), 13 kΩ (0.4W)	100V line: 670Ω (15W), 1kΩ (10W), 2kΩ (5W), 3.3kΩ (3W) 70V line: 330Ω (15W), 670Ω (7.5W), 1kΩ (5W), 2kΩ (2.5W), 3.3kΩ (1.5W)
<b>Sensitivity</b>	94dB (1W, 1m) (500Hz – 5kHz, pink noise)	96dB (1W, 1m) (500Hz – 5kHz, pink noise)
<b>Frequency Response</b>	40Hz – 20KHz (peak -20dB)	45Hz – 20KHz (peak -20dB)
<b>Speaker Component</b>	20cm (8") double cone-type	20cm (8") coaxial cone-type
<b>Dimensions for Fixing Hole</b>	Mounting hole: ø250 ±3mm, Ceiling thickness: 5 – 25mm	
<b>Speaker Mounting Method</b>	Spring clamp	
<b>Applicable Cable</b>	600V vinyl-insulated cable (IV wire or HIV wire), Solid copper wire: ø0.8 – ø1.6mm (equivalent to AWG 20 – 14) 7-core twisted copper wire: 0.75 – 1.25mm² (equivalent to AWG 18 – 16)	
<b>Connection</b>	Push-in connector (bridging terminal-2 branch type)	
<b>Finish</b>	Baffle: Steel plate, white (RAL9016 or equivalent colour), paint Grille: Surface-treated steel plate net, white (RAL9016 or equivalent colour), paint	
<b>Dimensions</b>	ø280 x 92 (D) mm	
<b>Weight</b>	1.4kg	1.6kg
<b>Accessory</b>	Paper Pattern x 1	

## » Flush Mount Ceiling Speaker

# PC-648R / PC-658R



Model	PC-648R	PC-658R
<b>Rated Input</b>	6W (100V line), 3W (70V line)	
<b>Rated Impedance</b>	100V line: 1.7kΩ (6W), 3.3kΩ (3W), 10kΩ (1W) 70V line: 1.7kΩ (3W), 3.3kΩ (1.5W), 10kΩ (0.5W)	
<b>Sensitivity</b>	90dB (1W, 1m) (500Hz – 5kHz, pink noise)	
<b>Frequency Response</b>	100Hz – 18kHz (peak -20dB)	65Hz – 18kHz (peak -20dB)
<b>Speaker Component</b>	12cm (5") cone type	16cm (6") cone type
<b>Dimensions for Fixing Hole</b>	Mounting hole: ø145 ±5mm Ceiling thickness: 5 – 25mm	Mounting hole: ø170 ±5mm Ceiling thickness: 5 – 25mm
<b>Speaker Mounting Method</b>	Spring clamp	
<b>Finish</b>	Baffle: polypropylene resin, off white (RAL9010 or equivalent color) Grille: Surface-treated steel plate net, off white (RAL9010 or equivalent color), paint	
<b>Dimensions</b>	ø168 x 77 (D) mm	ø192 x 73 (D) mm
<b>Weight</b>	470g	500g
<b>Accessory</b>	Paper Pattern x 1	

## » Small Sized Ceiling Speaker

### PC-6WM-EA



Model	PC-6WM-EA
Rated Input	6W
Rated Impedance	1.7 kΩ (6 W), 2.5 kΩ (4 W), 5 kΩ (2 W)
Sound Pressure Level	86 dB (1 m, 1 W)
Frequency Response	100 - 20,000 Hz (Peak - 10dB)
Speaker Component	7cm (3") cone-type
Operating Temperature	-10°C to +55°C
Dust/Water Protection	IPx4
Dimensions for fixing hole	Ø85 +5mm, -0mm

Speaker Mounting Method	Spring clip
Applicable Cable	Solid copper wire or 7-core twisted copper wire
Connection	Screw terminal
Finish	Baffle: Steel plate, RAL9016 or equivalent Grill: Steel plate net, RAL9016 or equivalent
Dimensions (Dia x H)	105 x 72 mm
Weight	0.5 kg

## Separate Flush Mount Ceiling Speakers with Spring Catch

## » Front Grille for CM-760 / CM-960

### CP-73 / CP-77

### CP-93 / CP-97



Model	CP-73	CP-77	CP-93	CP-97
Speaker Mounting Method	Spring catch			
Finish	Frame: ABS resin, off-white Net: Aluminum, off white, paint	Frame, net: Aluminum, off white, paint	Frame: ABS resin, off-white Net: Aluminum, off white, paint	Frame, net: Aluminum, off white, paint
Dimensions	ø180 x 11 (D) mm (exposed section)		ø230 x 12 (D) mm (exposed section)	
Weight	70g		100g	
Application Speaker	CM-760		CM-960	

## » Speaker Unit

### CM-760 / CM-960



Model	CM-760	CM-960
Rated Input	6W	
Rated Impedance	1.7kΩ (6W), 3.3kΩ (3W), (6.7kΩ (1.5W), 13kΩ (0.8W): Internal wiring must be changed)	
Sensitivity	90dB (1W, 1m)	92dB (1W, 1m)
Frequency Response	100Hz - 16kHz	100Hz - 12kHz
Speaker Component	12cm dynamic cone-type speaker	16cm dynamic cone-type speaker
Dimensions for Fixing Hole	ø150 (mounting hole) x 50mm (ceiling thickness)	ø200 (mounting hole) x 50mm (ceiling thickness)
Speaker Mounting Method	Spring catch	
Applicable Cable	600V Vinyl-insulated cable (IV wire or HIV wire), Solid copper wire: ø0.8 - ø1.2mm 7-core twisted copper wire: 0.75 - 1.25mm²	
Connection	Push-in connector (Bridging and branch connections possible)	
Finish	Grille: Fire-resistant, high-impact styrene resin (resin material grade: UL94 V-0 or its equivalent), black	
Dimensions	215 (W) x 134 (H) x 89 (D) mm	230 (W) x 174 (H) x 106.5 (D) mm
Weight	630g	850g
Applicable Panels	CP-73 and CP-77	CP-93 and CP-97

## Firedome Speakers

## » Firedome Speaker

### PC-1860BS



Model	PC-1860BS
Rated Output	6W (100 V Line), 3W (70 V Line)
Rated Impedance	100 V line: 1.7 kΩ(6W), 3.3 kΩ (3W), 6.7 kΩ (1.5W), 13 kΩ (0.8W) 70 V line: 1.7 kΩ(3W), 3.3 kΩ (1.5W), 6.7 kΩ (0.8W), 13 kΩ (0.4W)
Sensitivity	95 dB (1W, 1 m) (500 Hz - 5 kHz, pink noise) 93 dB (1W, 1 m) (100 Hz - 10 kHz, pink noise) 81 dB (1W, 4 m) (100 Hz - 10 kHz, pink noise)
Maximum Sound Pressure Level	100 dB (6W, 1 m) (100 Hz - 10 kHz, pink noise)
Frequency Response	88 dB (6W, 4 m) (100 Hz - 10 kHz, pink noise) 170 Hz - 20 kHz (peak -20 dB)
Coverage Angle (-6 dB)	Horizontal & Vertical: 165°(500 Hz), 175°(1 kHz), 165°(2 kHz), 70°(4 kHz) according to EN 54-24
Environmental type	A (indoor applications)

Speaker Component	12 cm (5") cone-type
Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)
Dimensions for Fixing Hole	Mounting hole: ø156 ±3 mm (6.14" ± 0.12") Ceiling thickness: 5 - 25 mm (0.2" - 0.98")
Speaker Mounting Method	Spring Catch
Applicable Cable	Solid wire: 0.8 - 6 mm² (AWG 18 - 10)
Connection	2-Steatite connector (3 pole)
Finish	Frame: Steel plate, white (RAL 9016 equivalent), paint Grille: Steel net, white (RAL 9016 equivalent), paint Fire dome: Steel plate, black, paint
Dimensions	ø180 x 5 (exposed section) + 100 (D) mm
Weight	1.1 kg (2.43 lb)
Accessory	Rubber grommet x2, Paper pattern x1

## »» Firedome Speaker

### PC-1860F



Model	PC-1860F
Rated Output	6 W (100 V Line), 3 W (70 V Line)
Rated Impedance	100 V line: 1.7 kΩ (6 W), 3.3 kΩ (3 W), 6.7 kΩ (1.5 W), 13 kΩ (0.8 W) 70 V line: 1.7 kΩ (3 W), 3.3 kΩ (1.5 W), 6.7 kΩ (0.8 W), 13 kΩ (0.4 W)
Sensitivity	95 dB (1 W, 1 m) (500 Hz - 5 kHz, pink noise)
Frequency Response	170 Hz - 20 kHz (peak -20 dB)
Speaker Component	12 cm (5") cone-type
Dimensions for Fixing Hole	Mounting hole: ø156 ±3 mm (6.14" ± 0.12")
Fixing Hole	Ceiling thickness: 5 - 25 mm (0.2" - 0.98")
Speaker Mounting Method	Spring Catch

Operating Temperature	-10 °C to +50 °C (14 °F to 122 °F)
Applicable Cable	Solid wire: 0.5 - 3 mm <sup>2</sup> (AWG 20 - 12)
Connection	Push wire connection (Bridging terminal - 2 branch type)
Finish	Frame: Steel plate, white (RAL 9016 equivalent), paint Grille: Steel net, white (RAL 9016 equivalent), paint Fire dome: Steel plate, black, paint
Dimensions	ø180 x 5 (exposed section) + 100 (D) mm
Weight	1 kg (2.2 lb)
Accessory	Rubber grommet ... 2, Paper pattern ... 1

## Clean Room / Splashproof Ceiling Speakers

### »» Splashproof Ceiling Speaker for Clean Rooms & Steam/Wet Sauna Rooms

#### PC-3CL



### »» Splashproof Ceiling Speaker for Shower Rooms

#### PC-3WR



Model	PC-3CL	PC-3WR
Rated Input	3W	3W, 1W
Rated Impedance	100V line: 3.3kΩ (3W), 10kΩ (1W) 70V line: 3.3kΩ (1.5W), 10kΩ (0.5W)	3.3kΩ (3W), 10kΩ (1W)
Sensitivity	87dB (1W, 1m)	88dB (1W, 1m)
Frequency Response	150Hz - 20kHz	180Hz - 20kHz
Enclosure	-	-
Speaker Component	8cm cone-type (vibration section: High molecular substance)	-
Operating Temperature	-20°C to +60°C	-10°C to +50°C
Chemical Resistance	Resistive to formalin solvent and iodine liquid (disinfectant)	-
Dust/Water Protection	IP64	IP64
Dust Particle Prevention	-	-
Finish	Panel: Alloy-coated ABS resin Enclosure: ABS resin Punching net: Stainless steel	Frame and case: ABS resin, off-white Punching net: Stainless steel
Dimensions for Fixing Holes	ø100mm (Ceiling panel: Must be over 5mm in thickness, equivalent to plywood in material, and strong enough to hold tapping screws)	ø150mm (The speaker can be mounted to the ceiling panel with thickness of up to 50mm)
Dimensions	ø139 x 104.5 (D) mm	ø180 x 120 (D) mm
Weight	550g	700g
	Packing (Material: Silicon rubber) x 1, Paper pattern x 1, Ceiling mounting tapping screws (Material: Stainless steel) x 4	-

Note for PC-3CL: The speaker cannot be used in dry sauna rooms or locations where unit is splashed with water.

Note for PC-3WR: Avoid using unit in locations where it is splashed with water.

## Horn Speakers

### Separate Reflex Horn Speakers and Driver Units

#### »» Separate Reflex Horn Speaker

#### TH-650 / TH-660




Model	TH-650	TH-660
Sensitivity	110dB (1W, 1m) (When operated with a driver.)	
Frequency Response	200Hz - 6kHz (When TU-631, TU-631M, TU-651, or TU-651M is used.) 200Hz - 8kHz (When TU-660 or TU-660M is used.)	
Dust/Water Protection	IP65 (When operated with a driver.)	
Driver Coupling	1 - 3/8 18 threads (inch screw)	
Operating Temperature	-20°C to +55°C (must be free from dew condensation)	
Finish	Horn flare and flange: Aluminum, off-white, powder coating Reflector horn: ABS resin, off-white Bracket holder: Aluminum, gray, powder coating Bracket: Steel, gray, powder coating Screws and bolts: Stainless steel	
Dimensions	ø500 x 394 (D) mm	ø600 x 425 (D) mm
Weight	2.9kg	3.6kg



## »» Separate Reflex Horn Driver Unit

### TU-631 TU-631M TU-651 TU-651M

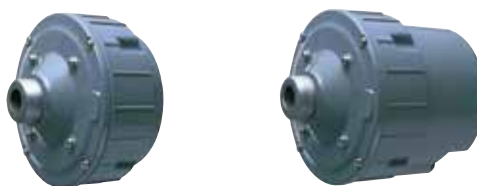

Model	TU-631	TU-631M	TU-651	TU-651M
Rated Input	30W	30W	50W	50W
Line Voltage	-	100V line or 70V line	-	100V line or 70V line
Rated Impedance	16Ω	100V line: 330Ω (30W), 670Ω (15W), 1kΩ (10W), 2kΩ (5W) 70V line: 170Ω (30W), 330Ω (15W), 670Ω (7.5W), 1kΩ (5W), 2kΩ (2.5W)	16Ω	100V line: 200Ω (50W), 330Ω (30W), 670Ω (15W) 70V line: 100Ω (50W), 200Ω (25W), 330Ω (15W), 670Ω (7.5W)
Sensitivity	110dB (1W, 1m) (When operated with JIS C 5504 standard horn)			
Frequency Response	150Hz – 6kHz (When operated with JIS C 5504 standard horn)			
Dust/Water Protection	IP65 (When operated with a horn)			
Horn Coupling	1 - 3/8 18 threads (inch screw)			
Polarity	Hot: Black, Com: White			
Operating Temperature	-20°C to +60°C (must be free from dew condensation)		-20°C to +55°C (must be free from dew condensation)	
Finish	Flange: Aluminum, gray, powder coating Rear cover: ABS resin, gray Screws: Stainless steel Speaker cable: Polyvinyl chloride insulated cabtyre cable (6mm in diameter, 600 mm in length)			
Dimensions	ø139 x 106 (D) mm	ø139 x 149 (D) mm	ø139 x 106 (D) mm	ø139 x 149 (D) mm
Weight	1.4kg	1.9kg	2kg	2.7kg
Option	Driver unit cover: UC-200A Matching Transformer: TM-30T, TM-60T	Driver unit cover: UC-200A	Driver unit cover: UC-200A Matching Transformer: TM-30T, TM-60T	Driver unit cover: UC-200A

Note: Avoid installing the speaker in locations which vibrate considerably, or under environment easy to be oil-contaminated.

## »» Separate Reflex Horn Driver Unit

### TU-660 TU-660M



Model	TU-660	TU-660M
Rated Input		60W
Line Voltage	-	100V line or 70V line
Rated Impedance	16Ω	100V line: 170Ω (60W), 330Ω (30W), 670Ω (15W) 70V line: 83Ω (60W), 170Ω (30W), 330Ω (15W), 670Ω (7.5W)
Sensitivity	110dB (1W, 1m) (When operated with JIS C 5504 standard horn)	
Frequency Response	150Hz – 8kHz (When operated with JIS C 5504 standard horn)	
Dust/Water Protection	IP65 (When operated with a horn)	
Horn Coupling	1 - 3/8 18 threads (inch screw)	
Polarity	Hot: Black, Com: White	
Operating Temperature	-20°C to +55°C (no condensation)	
Finish	Flange: Aluminum, gray, powder coating Rear cover: ABS resin, gray Screws: Stainless steel Speaker cable: Polyvinyl chloride insulated cabtyre cable (6mm in diameter, 600 mm in length)	
Dimensions	ø139 x 108 (D) mm	ø139 x 151 (D) mm
Weight	2kg	2.7kg
Option	Driver unit cover: UC-200A Matching Transformer: TM-30T, TM-60T	Driver unit cover: UC-200A

Note: Avoid installing the speaker in locations which vibrate considerably, or under environment easy to be oil-contaminated.

## »» Driver Unit Cover

### UC-200A

**Finish:** Unit cover: Glass fiber mixed unsaturated polyester resin, ivory, Cover fixing screw: Stainless

**Weight:** 590g

**Accessory:** Washer x 2, Throat gasket x 1

**Applicable Driver Unit:** TU-631, TU-631M, TU-651, TU-651M

**Applicable Horn:** TH-650, TH-660, DH-110, DH-120



## SC Series Reflex Horn Speakers

### »» SC Series Reflex Horn Speaker

#### SC-610 / SC-610M



Model	SC-610	SC-610M
Rated Input	10W (Mobile Mount use: 5W)	10W
Line Voltage	—	100V line or 70V line
Rated Impedance	8Ω	100V line: 1kΩ (10W), 2kΩ (5W), 3.3kΩ (3W), 10kΩ (1W) 70V line: 500Ω (10W), 1kΩ (5W), 2kΩ (2.5W), 3.3kΩ (1.5W), 10kΩ (0.5W)
Sensitivity	110dB (1W, 1m at 500Hz to 2.5kHz peak level)	
Frequency Response	315Hz – 12.5kHz	
Dust/Water Protection	IP65	
Polarity	Hot: Black, Com: White	
Operating Temperature	-20°C to +55°C (must be free from dew condensation)	
Finish	Horn flare: Aluminum, off-white, powder coating Reflector horn and rear cover: ABS resin, off-white Bracket, screws and bolts: Stainless steel Speaker cable: Polyvinyl chloride insulated cabtyre cable (6 mm in diameter, 600 mm in length)	
Dimensions	172 (W) x 161 (H) x 188 (D) mm	
Weight	1 kg	1.2 kg
Option	Swivel bracket: YS-151S (Can be used instead of the supplied bracket.)	

### »» SC Series Reflex Horn Speaker

#### SC-615 / SC-615M



Model	SC-615	SC-615M
Rated Input	15W (Mobile Mount use: 10W)	15W
Line Voltage	—	100V line or 70V line
Rated Impedance	8Ω	100V line: 670Ω (15W), 1kΩ (10W), 2kΩ (5W), 3.3kΩ (3W) 70V line: 330Ω (15W), 670Ω (7.5W), 1kΩ (5W), 2kΩ (2.5W), 3.3kΩ (1.5W)
Sensitivity	112dB (1W, 1m at 500Hz to 2.5kHz peak level)	
Frequency Response	280Hz – 12.5kHz	
Dust/Water Protection	IP65	
Polarity	Hot: Black, Com: White	
Operating Temperature	-20°C to +55°C (must be free from dew condensation)	
Finish	Horn flare: Aluminum, off-white, powder coating Reflector horn and rear cover: ABS resin, off-white Bracket, screws and bolts: Stainless steel Speaker cable: Polyvinyl chloride insulated cabtyre cable (6mm in diameter, 600mm in length)	
Dimensions	222 (W) x 179 (H) x 234 (D) mm	
Weight	1.1 kg	1.3 kg
Option	Swivel bracket: YS-151S (Can be used instead of the supplied bracket.)	

### »» SC Series Reflex Horn Speaker

#### SC-630 / SC-630M



Model	SC-630	SC-630M
Rated Input	30W (Mobile Mount use: 10W)	30W
Line Voltage	—	100V line or 70V line
Rated Impedance	8Ω	100V line: 330Ω (30W), 670Ω (15W), 1kΩ (10W), 2kΩ (5W) 70V line: 170Ω (30W), 330Ω (15W), 670Ω (7.5W), 1kΩ (5W), 2kΩ (2.5W)
Sensitivity	113dB (1W, 1m at 500Hz to 2.5kHz peak level)	
Frequency Response	250Hz – 10kHz	
Dust/Water Protection	IP65	
Polarity	Hot: Black, Com: White	
Operating Temperature	-20°C to +55°C (must be free from dew condensation)	
Finish	Horn flare: Aluminum, off-white, powder coating Reflector horn and rear cover: ABS resin, off-white Bracket, screws and bolts: Stainless steel Speaker cable: Polyvinyl chloride insulated cabtyre cable (6mm in diameter, 600mm in length)	
Dimensions	285 (W) x 227 (H) x 277 (D) mm	
Weight	1.7kg	2kg
Option	Swivel bracket: YS-151S (Can be used instead of the supplied bracket.)	

## »» SC Series Reflex Horn Speaker

### SC-651



Model	SC-651
Rated Input	50W (Mobil Mount use: 30W)
Rated Impedance	16Ω
Sensitivity	109dB (1W, 1m)
Frequency Response	250Hz - 6kHz
Dust/Water Protection	IP65
Polarity	Hot: Black, Com: White
Operating Temperature	20°C to +55°C (must be free from dew condensation)

Finish	Horn flare: Aluminum, off-white, powder coating Reflector horn: ABS resin, off-white Bracket holder: Aluminum, gray, powder coating Bracket: Steel, gray, powder coating Rear cover: ABS resin, gray Screws and bolts: Stainless steel Speaker cable: Polyvinyl chloride insulated cabtyre cable (6mm in diameter, 600mm in length)
Dimensions	430 (W) × 297.5 (H) × 327 (D) mm
Weight	3.4kg

## TC Series Reflex Horn Speakers

## »» TC Series Reflex Horn Speaker

### TC-615 / TC-615M



Model	TC-615	TC-615M
Rated Input	15W	15W
Line Voltage	-	100V Line or 70V Line
Rated Impedance	8Ω	100V Line: 670Ω (15W), 1kΩ (10W), 2kΩ (5W), 3.3kΩ (3W) 70V Line: 330Ω (15W), 670Ω (7.5W), 1kΩ (5W), 2kΩ (2.5W), 3.3kΩ (1.5W)
Sensitivity	108dB (1W, 1m)	
Frequency Response	250Hz - 7kHz	
Dust/Water Protection	IP65	
Polarity	Hot: Black, Com: White	
Operating Temperature	-20°C to +55°C (must be free from dew condensation)	
Finish	Horn flare: Aluminum, off-white, powder coating; Reflector horn: ABS resin, off-white Bracket holder: Aluminum, gray, powder coating; Bracket: Steel, gray, powder coating Rear cover: ABS resin, gray; Screw and bolts: Stainless steel Speaker Cable: Polyvinyl chloride insulated cabtyre cable (6mm in diameter, 600mm in length)	
Dimensions	ø400 (W) x 376 (D) mm	
Weight	3kg	3.2kg

## »» TC Series Reflex Horn Speaker

### TC-631 / TC-631M



Model	TC-631	TC-631M
Rated Input	30W	30W
Line Voltage	-	100V Line or 70V Line
Rated Impedance	16Ω	100V Line: 330Ω (30W), 670Ω (15W), 1kΩ (10W), 2kΩ (5W) 70V Line: 170Ω (30W), 330Ω (15W), 670Ω (7.5W), 1kΩ (5W), 2kΩ (2.5W)
Sensitivity	110dB (1W, 1m)	
Frequency Response	200Hz - 6kHz	
Dust/Water Protection	IP65	
Polarity	Hot: Black, Com: White	
Operating Temperature	-20°C to +60°C (must be free from dew condensation)	
Finish	Horn flare: Aluminum, off-white, powder coating; Reflector horn: ABS resin, off-white Bracket holder: Aluminum, gray, powder coating; Bracket: Steel, gray, powder coating Rear cover: ABS resin, gray; Screw and bolts: Stainless steel Speaker Cable: Polyvinyl chloride insulated cabtyre cable (6mm in diameter, 600mm in length)	
Dimensions	ø500 (W) x 463 (D) mm	
Weight	4.1 kg	4.5 kg

## »» TC Series Reflex Horn Speaker

### TC-651M



Model	TC-651M
Rated Input	50W
Line Voltage	100V line or 70V line
Rated Impedance	100V line: 200Ω (50W), 330Ω (30W), 670Ω (15W) 70V line: 100Ω (50W), 200Ω (25W), 330Ω (15W), 670Ω (7.5W)
Sensitivity	111dB (1W, 1m)
Frequency Response	200Hz - 6kHz
Dust/Water Protection	IP65
Polarity	Hot: Black, Com: White
Operating Temperature	-20°C to +60°C (must be free from dew condensation)

Finish	Horn flare: Aluminum, off-white, powder coating Reflector horn: ABS resin, off-white Bracket holder: Aluminum, white, powder coating Bracket: Steel, gray, powder coating Rear cover: ABS resin, gray Screw and bolts: Stainless steel Speaker Cable: Polyvinyl chloride insulated cabtyre cable (6mm in diameter, 600mm in length)
Dimensions	ø400 × 376 (D) mm
Weight	4kg

## Straight Horn Speakers

### »» Straight Horn Speaker

**DH-110**  
**DH-120**



Model	DH-110	DH-120
Sound Pressure Level	110dB (1W, 1m) *	
Frequency Response	180Hz – 6kHz *	
Applicable Unit	TU-631, TU-651, TU-631M, TU-651M, TU-660, TU-660M	
Driver Coupling	1 - 3/8 18 threads (inch screw)	
Variable Installation Angle	Vertical: +10°, -20° (when locally procured mounting bracket is used)	
Finish	Horn A: Aluminum, ivory, powder coating L-Shaped adapter and Horn C: Aluminum, ivory, powder coating Bracket: Steel plate, ivory, powder coating	Horn A: Aluminum, ivory, powder coating L-Shaped adapter and Adapter: Aluminum, ivory, powder coating Bracket: Steel plate, ivory, powder coating
Dimensions	ø518 x 968 (D) mm	ø518 x 884 (D) mm
Weight	5.3kg	
Accessory	Stainless steel bolt for assembly x 1 set, Gasket x 1 set, Anti-bird net x 1 set	

\* When TU-631 or TU-651 or TU-660 series is used.

Note: 1) An optional UC-200A cover protects the driver unit from the rain, snow, sand, sunlight, and salt water.

2) Only the bracket does not ensure the sufficient strength. Prepare separately a bracket mountable utilizing 2 M12 screw taps.

## Explosion-Proof Combination Reflex Horn Speakers

### »» Explosion-Proof Combination Reflex Horn Speaker

**TP-M15E / TP-M15D**



Model	TP-M15E	TP-M15D
Rated Input	15W	
Rated Impedance	670Ω (15W), 1kΩ (10W), 2kΩ (5W)	
Frequency Response	300Hz - 5.5kHz	350Hz - 4.5kHz
Sensitivity	104dB (1W, 1m)	
Category	eG4 (increased safety explosion-proof)	
Standard Environmental Condition	Temperature: -20°C to +40°C, Elevation: 1km or less, Relative Humidity: 45% to 85% Others: Dust, corrosive gas or vibration which requires special considerations to be provided in the explosion-proof facility must not exist	
Finish	Horn: Ivory, Others: Dark brown Bracket materials: Surface zinc treated steel plate (SECC, t3.2)	
Dimensions	ø392 x 475 (D) mm	ø242 x 368 (D) mm
Weight	4.9kg	4.3kg

#### Installation Locations

- Locations where flammable gas and vapor of flammable liquid are mixed together under the abnormal condition, creating an atmosphere close to the threshold of explosion.
- The TP-M15E/TP-M15D cannot be used in locations that can periodically create an explosive atmosphere when used or operated normally.

#### Poor Installation Location Examples

- 1) Locations where vessels are damaged due to corrosion or deterioration, causing explosive gas to escape.
- 2) Locations which emit explosive gas due to malfunctions, or high temperature or high pressure as a result of irregular reaction.
- 3) Locations which can create an explosive atmosphere when the ventilation device fails and explosive gas stays.
- 4) Peripheral areas of or rooms adjacent to locations which can create an explosive atmosphere in a normal state and the explosive gas rarely enters such areas or rooms.

## Wide Range Horn Speakers (Weatherproof)

### »» Wide Range Horn Speaker (Weatherproof)

**CS-64**



Model	CS-64
Rated Input	6W
Rated Impedance	100V Line: 1.7kΩ (6W), 33kΩ (3W), 10kΩ (1W) 70V Line: 830Ω (6W), 1.7KΩ (3W), 3.3kΩ (1.5W), 10kΩ (0.5W)
Sensitivity	96dB (1W, 1m)
Frequency Response	130Hz - 13kHz
Speaker Component	12cm cone-type (treated for splash proof)
Speaker Cord	2-core cabtyre cord with diameter of 6mm
Operating Temperature	-20°C to +55°C

Finish	Horn, cover: ABS resin, off-white, paint Bracket: Stainless steel Punched net: Surface-treated steel plate, dark-gray, power coating Screw: Stainless steel
Dimensions	233 (W) x 224 (H) x 208 (D) mm
Weight	1.5kg

Note: Do not install the speaker face-up from a horizontal plane nor in such a way that the paper cone is exposed to direct sunlight. If water accumulates on the paper cone, or ultraviolet rays are radiated on it, it is may cause the paper cone to deteriorate, leading to speaker malfunction.

## »» Wide Range Horn Speaker (Weatherproof)

### CS-154 / CS-304



Model	CS-154	CS-304
Rated Input	15W	30W
Rated Impedance	100V Line: 670Ω (15W), 1kΩ (10W), 2kΩ (5W) 70V Line: 330Ω (15W), 670Ω (7.5W), 1kΩ (5W), 2kΩ (2.5W)	100V Line: 330Ω (30W), 500Ω (20W), 1kΩ (10W) 70V Line: 170Ω (30W), 330Ω (15W), 500Ω (10W), 1kΩ (5W)
Sensitivity	97dB (1W, 1m)	98dB (1W, 1m)
Frequency Response	150Hz – 15kHz	120Hz – 15kHz
Speaker Component	12cm cone-type	
Horizontal Directivity	Constant directivity horn 90° (±45° horizontal from front axis), 93dB or more (1W, 1m), 3kHz at ±45°	
Speaker Cord	2-core cabtyre cord with diameter of 6mm	
Operating Temperature	-20°C to +55°C	
Dust/Water Protection	IP65	
Finish	Horn, cover: ABS resin, off-white, paint; Bracket: Stainless steel Net: Aluminum, gray, paint; Screw: Stainless steel	
Dimensions	366 (W) × 230 (H) × 272 (D) mm	
Weight	2.8kg	3.1kg

## Music Horn Speakers (Weatherproof)

### »» 2-Way Weatherproof Music Horn

### CS-760B-AS / CS-760W-AS



Model	CS-760B-AS	CS-760W-AS
Rated Input	60W	
Rated Impedance	100V Line: 170 Ω (60 W), 330 Ω (30 W), 670 Ω (15 W), 1.3 kΩ (7.5 W) 70V Line: 83 Ω (60 W), 170 Ω (30 W), 330 Ω (15 W), 670 Ω (7.5 W)	
Sensitivity	100 dB (1W, 1m)	
Maximum SPL ( 60W, 1m )	117 dB	
Frequency Response	100Hz - 20kHz	
Crossover Frequency	2.5kHz	
Directivity Angle	Horizontal : 90° ; Vertical : 80°	
Speaker Component	Low Frequency: 16cm (6") cone-type High Frequency: 2.5 cm (1") dome tweeter	
Dust/Water Protection	IP66	
Connection	Speaker cord (Hot: Black; Corn: White)	
Finish	Enclosure: ABS, Black, Paint Coating Punched Net: Surface-treated Steel Plate, Black, Paint Coating Bracket: Stainless Steel, Black, Powder Coating	Enclosure: ABS, White, Paint Coating Punched Net: Surface-treated Steel Plate, White, Paint Coating Bracket: Stainless Steel, White, Powder Coating
Dimensions	388 (W) × 310 (H) × 367 (D) mm	
Weight	7.4kg	

## Ultra-High Power Speaker

### »» Ultra-High Power Horn Speaker

### SC-240



Model	SC-240
Rated Input	240W
Rated Impedance	8 Ω × 4
Sound Pressure Level	107 dB (1 W, 1 m)
Frequency Response	250 - 5,000 Hz
Adjustable Angle Range	Vertical: 8.5 ° upward, 14 ° downward
Required Terminals	φ21 mm /2-pin round connector
Finish	Horn: Aluminum die casting, ivory Cover: Surface treated steel plate, ivory Driver unit case: Weatherproof ABS resin Bracket: Equal angle steel, ivory Horn mounting bolts: Dichromate-plated iron

Operating Temperature	-20 °C to +55 °C
Dimensions	598 (W) × 251 (H) × 654 (D) mm
Weight	28kg
Accessories	Driver unit case x1, Connection cord: YR-2120 x4
Speaker Input Method	φ21 mm /2-pin receptacle

### »» Matching Transformer

### TM-60T

**Impedance:** Primary: 290Ω (35W), 250Ω (40W), 220Ω (45W), 200Ω (50W), 180Ω (55W), 170Ω (60W)/  
Secondary: 4Ω, 8Ω, 16Ω  
**Frequency Response:** 80Hz – 16kHz  
**Dimensions:** 96 (W) × 96 (H)  
**Weight:** 1.3kg





## Garden Speaker

### » Garden Speaker

#### GS-302




Model	GS-302
Enclosure	Sealed type
Rated Input	30W (100V line), 15W (70V line)
Rated Impedance	100 V line: 330 Ω (30 W), 670 Ω (15 W), 1 kΩ (10 W), 2 kΩ (5 W), 3.3 kΩ (3 W) 70 V line: 330 Ω (15 W), 670 Ω (7.5 W), 1 kΩ (5 W), 2 kΩ (2.5 W), 3.3 kΩ (1.5 W)
Sensitivity (1W, 1m)	87 dB
Frequency Response	100 – 8,000 Hz
Speaker Component	12cm splash proof cone-type
Dust/Water Protection	Equivalent to IPX4

Input Terminal	Push-in terminal
Applicable Cable	Solid copper wire: φ0.8 – φ1.6 mm, Stranded copper wire: 0.75 – 1.25 mm²
Finish	Top cover and base: FRP resin, dark gray, semi-gloss, paint Speaker panel: ABS resin, dark gray, semi-gloss, paint Legs: Aluminum, dark gray, semi-gloss, paint
Dimensions	ø270 x 335(H) mm
Weight	2.4kg
Accessory	TOA label x2

## Wall Flush-Mount Speakers

### » Wall Flush-Mount Speaker

#### PC-391 / PC-391T



Model	PC-391	PC-391T
Rated Input	3W	
Rated Impedance	3.3kΩ, 10kΩ	3.3kΩ
Sensitivity	90.7dB (3W, 1m)	
Frequency Response	150Hz – 18kHz	
Speaker Component	7.7 cm cone-type speaker	
Attenuation	-	0 (OFF), 1 (–12dB), 2 (–6dB), 3 (0dB)
Finish	Baffle: Stainless steel; Grille: Aluminum, silver	
Dimensions	162 (W) x 115 (H) x 43 (D) mm (excluding the projected screw heads)	162 (W) x 115 (H) x 47 (D) mm (excluding the projection parts such as a switch knob)
Weight	560g	600g
Accessory	Switch box mounting screw x 4, Speaker mounting screw x 4, Wood screw x 4	

### » Flush Mount Back Box

#### YC-150

**Finish:** Zinc-plating, t1.6  
**Dimensions:** 184 (W) x 119 (H) x 57 (D) mm  
**Weight:** 700g



### » Flush Mount Back Box

#### YC-150E

**Finish:** Heavy chrome plating, t1.2  
**Dimensions:** 145 (W) x 95 (H) x 57 (D) mm  
**Weight:** 410g



## Others

## Attenuators

### » Attenuator

#### AT-063AP / AT-303AP / AT-603AP



Model	AT-063AP	AT-303AP	AT-603AP
Input Range	0.5W - 6W	0.5W - 30W	0.5W - 60W
Attenuation	5 steps (0dB, - 6dB, - 12dB, - 18dB,OFF)		
Applicable Cable	600V vinyl-insulated cable (Indoor Vinyl or Heat-resistant Indoor Vinyl cable) Solid cable: ø0.8 - ø1.6mm		
Finish	Knob, panel, plate: ABS resin, white (RAL 1013 or equivalent color) Case: ABS resin, black		
Terminal	Push-in connector		
Dimensions	70 (W) x 120 (H) x 52.4 (D) mm (with plate) 41 (W) x 108 (H) x 52.4 (D) mm (attenuator only)		
Weight	170g (unit only)	210g (unit only)	
Accessory	Plate x 1, Plate mounting screw x 2, Box mounting screw x 2		
Applicable Plate	YP-1AF (option)		
Applicable Box	YS-11A (option)		

## » Attenuator

# AT-4012B-EB / AT-4030B-EB

# AT-4060B-EB / AT-4120B-EB

# AT-4200B-EB



Model	AT-4012B-EB	AT-4030B-EB	AT-4060B-EB	AT-4120B-EB	AT-4200B-EB
Input Capacity	12W	30W	60W	120W	200W
Attenuation	8 Steps ( 0dB, -3dB, -9dB, -12dB, -15dB, -18dB, OFF )				
Override Indicator	Red LED (4-wire connection only)				
Overriding Voltage	24V, 11mA DC (4-wire connection only)				
Dimensions	86(W) x 86(H) x 24(D) mm	86 (W) x 86 (H) x 51 (D) mm			
Weight	0.12kg	0.45kg	0.46kg	0.48 kg	0.49kg
Finish	Knob, Cover Panel: ABS Resin, White (RAL 9016 or equivalent) Front Panel (Plate): Surface treated steel plate				
Terminal	Screw type x 5				
Usable Cable	Cable range 22 - 14 AWG				
Accessory	-	Box (85.5 (W) x 85.5 (H) x 60 (D) mm) x 1, Back plate mounting screw x 2			

## Impedance Meter

## » Impedance Meter

### ZM-104A



Model	ZM-104A
Power Supply	R6 x 4 (1.5V DC x 4)
Current Consumption	39mA
Reading	Direct reading meter, unit: Ω
Measurement Range	x1 range: 5Ω - 1kΩ, x10 range: 50Ω - 10kΩ, x100 range: 500Ω - 100kΩ
Accuracy	±10%
Oscillation Frequency	1kHz, ±10%
Battery Life when continuously used	x1 range: 30 hours x10 range and x100 range: 60 hours

Operating Temperature	-5°C to +40°C
Dimensions	110 (W) x 180 (H) x 58 (D) mm (Unit) 120 (W) x 220 (H) x 63 (D) mm (Carrying case)
Finish	ABS resin, black
Weight	700g (including carrying case, without batteries)
Accessory	Test leads x 1 set
Measurement Category	CAT I

## Optional Accessories

## » Pole Mount Bracket

### SP-131



**Load Capacity:** 5kg  
**Finish:** Bracket and screw: Stainless steel  
**Weight:** 330g (bracket only)  
**Product Composition:** Mounting bracket x 2,  
 Mounting screw (M10 x 25 bolt set, M8 x 20 bolt set)  
 each x 1 set  
**Applicable Unit:** SC-610, SC-610M, SC-615,  
 SC-615M, SC-630, SC-630M

## » Wall And Pole Mount Bracket

### SP-201



**Load Capacity:** 10kg  
**Finish:** Bracket and screw: Stainless steel  
**Weight:** 610g (bracket only)  
**Product Composition:** Mounting bracket x 1,  
 Mounting screw (M10 x 25 bolt set, M8 x 20 bolt set)  
 each x 1 set  
**Applicable Unit:** TH-650, TH660, SC-610, SC-610M,  
 SC-615, SC-615M, SC-630, SC-630M

## » Wall Mount Bracket

### SP-301



**Load Capacity:** 5kg  
**Finish:** Bracket and screw: Stainless steel  
**Weight:** 910g (bracket only)  
**Product Composition:** Mounting bracket x 1,  
 Mounting screw (M10 x 25 bolt set, M8 x 20 bolt set)  
 each x 1 set  
**Applicable Unit:** SC-610, SC-610M, SC-615,  
 SC-615M, SC-630, SC-630M

## » Swivel Bracket

### YS-151S



**Finish:** Bracket: Zinc, black, paint  
 Hexagon headed bolt, butterfly nut, coiled  
 spring, and washer: Stainless steel  
**Weight:** 430g  
**Applicable Unit:** SC-610, SC-610M,  
 SC-615, SC-615M, SC-630, SC-630M  
**Mounting Method:**  
 Mounting using (1) M6 bolt - 3pcs,  
 (2) G16 cable pipe, (3) Band

## » Wall Mounting Back Box

### YS-11A



**Finish:** High impact polystyrene resin,  
 milky white  
**Dimensions:**  
 70 (W) x 120 (H) x 40 (D) mm  
**Weight:** 60g  
**Accessory:** Countersunk head machine  
 screw x 2, Round head wood screw x 2  
**Application Unit:**  
 AT series Attenuators (Applicable plates: YP-1AF),  
 YM/YS series connector units (Applicable plates: YP-1AF)

## » Pole Band


### YS-60B



**Mounting Pole Diameter:** Approx. ø90 - ø340  
**Finish:** Electroless zinc plating  
**Weight:** 360g (per band)  
**Product Composition:** Pole band x 2

# Conference Systems

## Integrated Audio Collaboration System

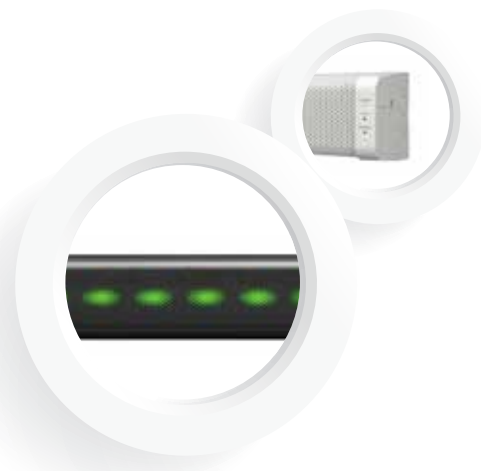

### » Integrated Audio Collaboration System

## AM-CF1B / AM-CF1W




Model	AM-CF1B	AM-CF1W
<b>Power Source</b>	12 V DC (supplied from the specified AC adapter) or 52 V DC (supplied from the specified PoE extender)	
<b>Current Consumption</b>	Under 3.5 A	
<b>Inputs</b>	USB Audio: 2 channels, USB 3.0 / USB 2.0 / USB 1.1 micro-B port Bluetooth: 2 channels, Codec: 1 channel, RCA pin jack, -10 dB*, 10 kΩ, unbalanced type AUX: 2 channels, RCA pin jack, -10 dB*, 10 kΩ, unbalanced type	
<b>Outputs</b>	USB Audio: 2 channels, USB 3.0 / USB 2.0 / USB 1.1 micro-B port Bluetooth: 2 channels Codec: 1 channel, RCA pin jack, -10 dB*, 600 Ω, unbalanced type AUX: 2 channels, removable terminal block (6 pins), 4 dB*, 600 Ω, balanced (electronically-balanced) type Internal speaker: 2-way x 2 (woofer x 2, tweeter x 1)	
<b>Control Inputs</b>	2 inputs, removable terminal block (6 pins), no-voltage make contact	
<b>Control Outputs</b>	2 outputs, removable terminal block (6 pins), no-voltage make contact, relay contact output	
<b>Network I/F</b>	10BASE-T/100BASE-TX, RJ45	
<b>Array Microphone</b>	Unidirectional electret condenser type	
<b>Frequency Characteristics</b>	20 Hz - 20 kHz (AUX-IN - AUX-OUT) Power Switch, Bluetooth Pairing, Mute, Volume Up/Down	
<b>Operation Section</b>	Power (blue/green/orange/red), USB connection (green), Bluetooth (blue), Multifunction (green/red)	
<b>Indicator</b>	0 °C - 40 °C (32 °F - 104 °F)	
<b>Operating Temperature</b>	90 % RH or less (no condensation)	
<b>Operating Humidity</b>	Body: Aluminum, Black Punched Net: Steel, Black (RAL 9005 equivalent) Side Cover: ABS resin, black	
<b>Finish</b>	Body: Aluminum, White Punched Net: Steel, White (RAL 9003 equivalent) Side Cover: ABS resin, white	
<b>Dimensions</b>	799 (W) x 83.2 (H) x 85.5 (D) mm (31.46" x 3.28" x 3.37") 4.6 kg (10.14 lb)	

(\*) 0 dB = 1 V

(\*) 0 dB = 0.775 V



GUI for easy setup and control

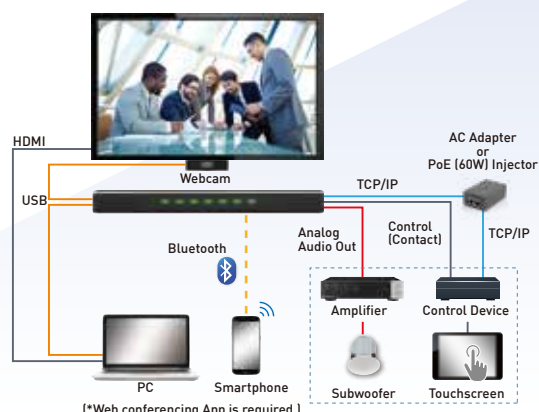

## TS-920 / TS-820 Series

### » Central Unit

TS-920RC

TS-820RC

TS-820



\* 0dB = 1V

Model	TS-920RC	TS-820RC	TS-820
Power Source	100 – 240V AC, 50/60Hz (use of supplied AC adapter)		
Power Consumption	72W		
Current Consumption	Max. 3A DC (when 24V DC is supplied from the accessory AC adapter)		
Current Frequency	Reception: Audio channel 1: 7.35MHz, Audio channel 2: 8.10MHz, Audio channel 3: 8.55MHz, Audio channel 4: 9.15MHz, Control channel: 6.45MHz Transmission: Base language channel: 1.95MHz Translation language channel: 2.25MHz	Reception: Audio channel 1: 7.35MHz, Audio channel 2: 8.10MHz, Audio channel 3: 8.55MHz, Audio channel 4: 9.15MHz, Control channel: 6.45MHz Transmission: Base language channel: 1.95MHz	
Input	MIC 1 (Base Language): –60dB*, 600Ω, unbalanced, ø6.3mm phone jack (2 pins) MIC 2 (Translation Language): –60dB*, 600Ω, unbalanced, ø6.3mm phone jack (2 pins) AUX 1 (Base Language): –20dB*, 10kΩ, unbalanced, ø6.3mm phone jack (2 pins) AUX 2 (Translation Language): –20dB*, 10kΩ, unbalanced, ø6.3mm phone jack (2 pins) AUX 3 (Bass and Translation Language): –20dB*, 10kΩ, unbalanced, ø6.3mm phone jack (2 pins)	MIC 1 (Base Language): –60dB*, 600Ω, unbalanced, ø6.3mm phone jack (2 pins) MIC 2 (Translation Language): –60dB*, 600Ω, unbalanced, ø6.3mm phone jack (2 pins)	
Output	LINE: -10dB*, 10kΩ, unbalanced, ø6.3mm phone jack (2P) REC: -10dB*, 10kΩ, unbalanced, ø6.3mm phone jack (2P), RCA pin jack HEADPHONE: ø3.5 mini jack (3P: monaural)		
External Equalizer	Input: –20dB*, 10kΩ, unbalanced, RCA pin jack Output: –20dB*, 10kΩ, unbalanced, RCA pin jack		
No. of Connectable Chairman/Delegate Units	192 units	64 units	
No. of Connectable Infrared Transmitter/ Receiver Units	Up to 4 units (with the use of distributor, up to 16 units connectable when they are all TS-905, and up to 12 units when they are all TS-907, or TS-905 and TS-907 are used in combination)		
Infrared Transmitter/ Receiver I/O Terminal	BNC jack		
External Contol Connection Terminal	D-sub connector (9P, male)/ USB-B selectable		
LED Indicator	Voting result indicators 1-3 (7-segment LED, 3 digits), Short-circuit indicator, Audio signal receiving indicators 1-4 CH, Data signal receiving indicator, External control priority indicator, External control communication indicator, Battery indicator (flashes when a Chairman/ Delegate unit's battery nears complete discharge), Recording status indicator, Format in-progress indicator, Acess Indicator, Internal memory capacity warning indicator, USB memory status indicator, Remaining internal memory capacity warning indicator, Remaining USB memory capacity warning indicator	Audio signal receiving indicators 1-4 CH, Data signal receiving indicator, External control priority indicator, External control communication indicator, Battery indicator (flashes when a Chairman/ Delegate unit's battery nears complete discharge), Recording status indicator, Format in-progress indicator, Acess Indicator, Internal memory capacity warning indicator, USB memory status indicator, Remaining internal memory capacity warning indicator, Remaining USB memory capacity warning indicator, Short-circuit indicator	Audio signal receiving indicators 1-4 CH, Data signal receiving indicator, External control priority indicator, External control communication indicator, Battery indicator (flashes when a Chairman/ Delegate unit's battery nears complete discharge), Short-circuit indicator
Record Switch	Recording start button, Recording stop button, Format button		-
Recording Parts	USB-A (for USB memory devices) and USB Mini-B (for PCs)		-
Recording Function	Recordings can be made to a USB memory device or internal memory. Recording format: MP3 (MPEG-1 Audio Layer-3), monaural ; Sampling frequency: 32 kHz, Bit rate: 128kbps		-
Function Switch	No. of open microphones setting switch: 1/2/3/4 Mic-off setting switch: TIME OUT ON/ OFF Speech priority selector switch: FIRST (First-in-first-out priority), LATEST (Last-in-first-out priority), FIRST:FIXED NEXT:LATEST (Priority fixed for the first unit, and last-in-first-out priority for the subsequent units) FBS switch: Auto/OFF/EXT		
Operating Temperature	0°C to +40°C		
Operating Humidity	90% RH or less (no condensation)		
Finish	Panel: Surface-treated steel plate, black, 30% gloss, paint		
Weight	2.8kg		2.7kg
Accessory	AC adapter (Cord length: 1.8m DC cord, and 2m detachable AC cord) × 1		
Option	Rack mounting bracket: MB-TS920		

>>> Infrared Chairman Unit

TS-921



>>> Infrared Delegate Unit

TS-922



>>> Infrared Chairman Unit

TS-821



>>> Infrared Delegate Unit

TS-822



Model	TS-921	TS-922	TS-821	TS-822
Power Source	7.2 V DC (supplied from optional lithium-ion battery), 9V DC (AC adapter) (supplied from optional AC adapter)			
Current Consumption	Max. 390mA			
Infrared Emitter/ Detector Wavelength Modulation Method Carrier Frequency	870nm (AM: Brightness modulation) Frequency modulation  Transmission: Audio channel 1: 7.35MHz, Audio channel 2: 8.10MHz Audio channel 3: 8.55MHz, Audio channel 4: 9.15MHz Control channel: 6.45MHz  Reception: Base language channel: 1.95MHz Translation language channel: 2.25MHz 7m (radius)		870nm (AM: Brightness modulation) Frequency modulation  Transmission: Audio channel 1: 7.35MHz, Audio channel 2: 8.10MHz Audio channel 3: 8.55MHz, Audio channel 4: 9.15MHz Control channel: 6.45MHz  Reception: Audio channel: 1.95MHz 7m (radius)	
Covering Range				
Input	Microphone terminal: XLR-4-31 type			
Output	Monitor speaker: 8Ω, 0.2W; Headphone: ø3.5mm mini jack (3 pins: monaural) × 2			
LED Indicator	Speech indicator, Voting status indicators 1 – 3, power indicator		Speech indicator, Power indicator	
Function	Monitor volume control Headphone volume control Priority speech function Voting function Monitor selector switch (MAIN/SUB)	Monitor volume control Headphone volume control Voting function Monitor selector switch (MAIN/SUB)	Monitor volume control Headphone volume control Priority speech function	Monitor volume control Headphone volume control
Battery Life	Approx. 10 hours			
Operating Temperature	0°C to +40°C			
Operating Humidity	90% RH or less (no condensation)			
Finish	Case: PC resin, black ; Speaker net: black, mat finish, paint			
Dimensions	205.7 (W) × 70.3 (H) × 164.2 (D) mm			
Weight	525 g			
Option	Microphone: TS-923, TS-903, TS-924, TS-904 (Select either one) ; Lithium-ion battery: BP-900A; AC adapter: AD-0910			

>>> Standard Microphone Unit / Long Microphone Unit

TS-923 / TS-924



Model	TS-923	TS-924
<b>Type</b>	Electret condenser microphone	
<b>Directivity</b>	Unidirectional	
<b>Rated Impedance</b>	1.4kΩ	
<b>Rated Sensitivity</b>	-37dB (1kHz, 0dB = 1V/ Pa)	
<b>LED Indicator</b>	Speech Indicator (ring type) Red	
<b>Frequency Response</b>	100 Hz – 13 kHz	
<b>Output Connector</b>	Combined type of XLR-4-32	
<b>Flexible Part</b>	2 parts	
<b>Operating Temperature</b>	0°C to +40°C	
<b>Operating Humidity</b>	90% RH or less (no condensation)	
<b>Finish</b>	Body: Aluminum, black, semi-gloss, paint Shaft: Copper alloy, black, semi-gloss, paint	
<b>Length</b>	470mm	620mm
<b>Weight</b>	130g	150g
<b>Applicable Unit (Option)</b>	Chairman Units: TS-821, TS-921, TS-811, TS-911 Delegate Units: TS-822, TS-922, TS-812, TS-912	



## TS-910 Series

### » Central Unit

## TS-910



<b>Model</b>	TS-910
<b>Power Source</b>	100 – 240V AC, 50/60Hz (use of supplied AC adapter)
<b>Power Consumption</b>	72W
<b>Current Consumption</b>	Max. 3A DC (when 24V DC is supplied from the accessory AC adapter)
<b>Current Frequency</b>	Reception: Audio channel 1: 7.35MHz, Audio channel 2: 8.10MHz, Audio channel 3: 8.55MHz, Audio channel 4: 9.15MHz, Control channel: 6.45MHz Transmission: Base language channel: 1.95MHz Translation language channel: 2.25MHz
<b>Input</b>	MIC 1 (Base Language): –60dB*, 600Ω, unbalanced, ø6.3mm phone jack (2 pins) MIC 2 (Translation Language): –60dB*, 600Ω, unbalanced, ø6.3mm phone jack (2 pins) AUX 1 (Base Language): –20dB*, 10kΩ, unbalanced, ø6.3mm phone jack (2 pins) AUX 2 (Translation Language): –20dB*, 10kΩ, unbalanced, ø6.3mm phone jack (2 pins) AUX 3 (Bass and Translation Language): –20dB*, 10kΩ, unbalanced, ø6.3mm phone jack (2 pins)
<b>Output</b>	LINE: –20dB*, 10kΩ, unbalanced, ø6.3mm phone jack (2P) REC: –20dB*, 10kΩ, unbalanced, ø6.3mm phone jack (2P), RCA pin jack HEADPHONE: ø3.5 mini jack (3P: monaural)
<b>External Equalizer</b>	Input: –20dB*, 10kΩ, unbalanced, RCA pin jack Output: –20dB*, 10kΩ, unbalanced, RCA pin jack
<b>No. of Connectable Chairman/Delegate Units</b>	192 units
<b>No. of Connectable Infrared Transmitter/ Receiver Units</b>	Up to 4 units (with the use of distributor, up to 16 units connectable when they are all TS-905, and up to 12 units when they are all TS-907, or TS-905 and TS-907 are used in combination)

<b>Infrared Transmitter/ Receiver I/O Terminal</b>	BNC jack
<b>No. of Connectable Expansion Unit</b>	4 units (up to 8 units connectable when using a distributor)
<b>LED Indicator</b>	Voting result indicators 1-3 (7-segment LED, 3 digits), audio signal receiving indicators 1-4 CH, data signal receiving indicator, external control priority indicator, external control communication indicator, battery indicator (flashes in case of battery warning of infrared conference unit), short-circuit indicator
<b>External Control Terminal</b>	D-sub connector (9 P, male)/USB-B selectable
<b>Function Switch</b>	Simultaneous speaker No. setting switch: 1/2/3/4 Mic-off setting switch: TIME OUT ON/ OFF Speech priority selector switch: A/B/C (A: First-in-first-out priority, B: Last-in-first-out priority, C: Fixed for the first unit, and last-in-first-out for the subsequent units), FBS selector switch: External equalizer/OFF/FBS Auto/FBS Manual
<b>Operating Temperature</b>	0°C to +40°C
<b>Operating Humidity</b>	90% RH or less (no condensation)
<b>Finish</b>	Panel: Surface-treated steel plate, gray metallic, paint, semi-gloss
<b>Dimensions</b>	359 (W) × 118.8 (H) × 138.2 (D) mm
<b>Weight</b>	2.8kg
<b>Accessory</b>	AC adapter (Cord length: 1.8m DC cord, and 2m detachable AC cord) × 1
<b>Option</b>	Rack mounting bracket: MB-TS900

### » Wired Chairman Unit

## TS-911



### » Wired Delegate Unit

## TS-912



### » Wired Chairman Unit

## TS-811



### » Wired Delegate Unit

## TS-812



Model	TS-911	TS-912	TS-811	TS-812
Power Source	24V DC (supplied from the optional TS-918 Expansion unit)			
Current Consumption	Max. 60mA			
Modulation Method	Frequency modulation			
Carrier Frequency	Transmission: Audio channel 1: 7.35MHz, Audio channel 2: 8.10MHz Audio channel 3: 8.55MHz, Audio channel 4: 9.15MHz Control channel: 6.45MHz Reception: Base language channel: 1.95MHz Translation language channel: 2.25MHz		Transmission: Audio channel 1: 7.35MHz, Audio channel 2: 8.10MHz Audio channel 3: 8.55MHz, Audio channel 4: 9.15MHz Control channel: 6.45MHz Reception: Audio channel: 1.95MHz	
Input	Microphone terminal: XLR-4-31 type (dedicated for connecting the optional TS-903 or TS-904)			
Output	Monitor speaker: 8Ω, 0.2W Headphone: ø3.5mm mini jack (3P: monaural) x 2			
Connection Terminal	RJ45 connector			
LED Indicator	Speech indicator (flashes at communication failure), Voting status indicators 1 – 3, Power indicator (flashes at communication failure)		Speech indicator (flashes at communication failure), Power indicator (flashes at communication failure)	
Function	Monitor volume control Headphone volume control Priority speech function Voting function Monitor selector switch (MAIN/ SUB)	Monitor volume control Headphone volume control Voting function Monitor selector switch (MAIN/ SUB)	Monitor volume control Headphone volume control Priority speech function	Monitor volume control Headphone volume control
Operating Temperature	0°C to +40°C			
Operating Humidity	90% RH or less (no condensation)			
Finish	Top panel: ABS resin, gray metallic, paint, semi-gloss			
Dimensions	210 (W) x 68.6 (H) x 152 (D) mm			
Weight	570g		560g	
Option	Microphone: TS-903, TS-904			

## TS-910 Series Optional Accessories

### »» Expansion Unit

## TS-918



Model	TS-918
<b>Power Source</b>	100 – 240V AC, 50/ 60Hz (use of the supplied AC adapter)
<b>Power Consumption</b>	74.4W
<b>Current Consumption</b>	Max. 3.1A DC (when 24V DC is supplied from the accessory AC adapter)
<b>Gain</b>	Upstream: +16.5dB, Downstream: +12.5dB
<b>Connection Terminal</b>	Central unit connection terminal: BNC jack Bridge unit connection terminal: RJ45 connector
<b>LED Indicator</b>	Connection status indicators (3 LEDs each on the front and rear panels), Power indicator
<b>No. of Connectable Chairman/ Delegate Units</b>	Up to 24 units (when using 21 units of TS-919B1 or 6 units of TS-919B4, both optional Bridge units)
<b>Operating Temperature</b>	0°C to +40°C

<b>Operating Humidity</b>	90% RH or less (no condensation)
<b>Finish</b>	Panel: Aluminum, black, 30% gloss, melamine-baked paint Case: Pre-coated steel plate, black
<b>Dimensions</b>	210 (W) x 44 (H) x 296.5 (D) mm
<b>Weight</b>	1.6kg
<b>Accessory</b>	AC adapter (cord length: 1.8m DC cord, and 2m detachable AC cord x 1, BNC plug-to-BNC plug cord (50cm) x 1
<b>Option</b>	Rack mounting bracket: MB-15B-BK (for rack mounting one units) MB-15B-J (for rack mounting two units)

### »» Bridge Unit

## TS-919B1 / TS-919B4



Model	TS-919B1	TS-919B4
<b>Power Source</b>	24V DC (supplied from the optional TS-918 Expansion Unit)	
<b>Current Consumption</b>	Max. 16mA	Max. 26 mA
<b>Branching Loss</b>	Upstream: 16.5dB Downstream: 16dB	Upstream: 17.5dB Downstream: 16.5dB
<b>Insertion Loss</b>	Upstream: 1dB Downstream: 0.5dB	Upstream: 3dB Downstream: 2dB
<b>Connection Terminal</b>	Communication cable: RJ45 connector x 2 Conference unit: RJ45 connector	Communication cable: RJ45 connector x 2 Conference unit : RJ45 connector x 4
<b>LED Indicator</b>	Connection status	Connection status x 4
<b>No. of Connectable Chairman/ Delegate Units</b>	1 unit	4 units
<b>Operating Temperature</b>	0°C to +40°C	
<b>Operating Humidity</b>	90% RH or less (no condensation)	
<b>Finish</b>	ABS resin, black	
<b>Dimensions</b>	68 (W) x 60.3 (H) x 24 (D) mm	176.2 (W) x 75 (H) x 29.8 (D) mm
<b>Weight</b>	40g	160g

## TS-910 / TS-920 / TS-820. Series Optional Accessories

### »» Standard Microphone Unit / Long Microphone Unit

## TS-903 / TS-904



Model	TS-903	TS-904
<b>Type</b>	Electret condenser microphone	
<b>Directivity</b>	Unidirectional	
<b>Rated Impedance</b>	1.8kΩ	
<b>Rated Sensitivity</b>	-37dB (1kHz, 0dB = 1V/ Pa)	
<b>LED Indicator</b>	Speech (ring type)	
<b>Frequency Response</b>	100Hz – 13kHz	
<b>Output Connector</b>	Combined type of XLR-4-32	
<b>Operating Temperature</b>	0°C to +40°C	
<b>Operating Humidity</b>	90% RH or less (no condensation)	
<b>Finish</b>	Gooseneck: Stainless steel, black; Other: ABS resin, black	
<b>Length</b>	368mm	518mm
<b>Weight</b>	90g	105g
<b>Applicable Unit (Option)</b>	Chairman/ Delegate Units: TS-801, TS-802, TS-811, TS-812, TS-901, TS-902, TS-911 and TS-912	

## » Infrared Transmitter/Receiver

### TS-905 / TS-907



Model	TS-905	TS-907
<b>Power Source</b>	24V DC (supplied from the optional TS-900 or TS-800)	
<b>Current Consumption</b>	Max. 150mA	Max. 180mA
<b>Infrared Emitter/ Detector</b>	Wavelength: 870nm (AM: Brightness modulation) Modulation Method: Frequency modulation Carrier Frequency: <div>             Transmission: Audio channel 1: 7.35MHz              Audio channel 2: 8.10MHz              Audio channel 3: 8.55MHz              Audio channel 4: 9.15MHz              Control channel: 6.45MHz              Reception: Base language channel: 1.95MHz              Translation language channel: 2.25MHz           </div>	
Acceptance Angle	Vertical: 150° (75°+75°), Horizontal: 360°	Vertical: 90° (45°+45°), Horizontal: 360°
Emission Angle	Vertical: 150° (75°+75°), Horizontal: 360°	Vertical: 90° (45°+45°), Horizontal: 360°
Communication Area	Approx. 6 – 7m in radius from the point underneath the unit (ceiling height: 2.5 – 4.5m)	Approx. 6m in radius from the point underneath the unit (ceiling height: 5 – 7m)
<b>Connection Terminal</b>	BNC jack	
<b>LED Indicator</b>	Power	
<b>Operating Temperature</b>	0°C to +40°C	
<b>Operating Humidity</b>	90% RH or less (no condensation)	
<b>Finish</b>	Dome: PC resin, visible light cut filter; Base: ABS resin, black	
<b>Dimensions</b>	ø120 × 71.3 (H) mm	
<b>Weight</b>	230g (unit only)	
<b>Accessory</b>	Mounting bracket × 1, Stand mounting bracket × 1, Stand mounting bracket attaching screw × 3, Thread adapter (U5/16 - NS5/8) × 1	
<b>Option</b>	Microphone stand (the mounting thread size must be U5/16 or NS5/8)	

## » RF Distributor

### YW-1022

**Frequency Range:** 1.6 – 1,000 MHz (excluding 50 – 70 MHz)

**Distribution Loss:** 4.5dB ±3dB (between the Mixing and each Distribution terminals)

**Input/Output Impedance:** 75Ω

**Coaxial Connector:**

Mixing terminal: BNC jack, power passing type (30V DC or less, under 2A or less)

Distribution 1 and 2 terminals: BNC jack, power passing type (30V DC or less, 1A or less)

**Operating Temperature:** -10°C to +50°C

**Operating Humidity:** 90% RH or less (no condensation)

**Finish:** ABS resin, gray

**Dimensions:** 75 (W) × 122 (H) × 34 (D) mm

**Weight:** 105g

**Accessory:** Unit fixing wood screw (4.1 × 25) × 2



## » RF Distributor

### YW-1024

**Frequency Range:** 1.6 – 1,000 MHz (excluding 50 – 70 MHz)

**Distribution Loss:** 8.5dB ±3dB (between the Mixing and each Distribution terminal)

**Input/Output Impedance:** 75Ω

**Coaxial Connector:**

Mixing terminal: BNC jack, power passing type (30V DC or less, 2A or less)

Distribution 1 - 4 terminals: BNC jack, power passing type (30V DC or less, 1A or less)

**Operating Temperature:** -10°C to +50°C

**Operating Humidity:** 90% RH or less (no condensation)

**Finish:** ABS resin, gray

**Dimensions:** 75 (W) × 122 (H) × 34 (D) mm

**Weight:** 120g

**Accessory:** Unit fixing wood screw (4.1 × 25) × 2



## » Battery Charger

### BC-920

**Power Source:** 100 – 240V AC, 50/ 60Hz (supplied from AC adapter)

**Current Consumption:** Max. 1.4A

**Charging Time:** Approx. 5 hours

**Charging Capacity:** 8 pieces BP-900A(option) or BP-920(option) batteries

**LED Indicator:** Charging status (Green: Full charge, Red: On charge), Power indicator

**Operating Temperature:** 0°C to +40°C

**Operating Humidity:** 90% RH or less (no condensation)

**Finish:** Case: Steel, black, paint, Battery receptacles: PPO resin, black

**Dimensions:** 240 (W) × 70 (H) × 115 (D) mm

**Weight:** Unit: 1.1kg,

**Accessory:** AC adapter (Cord length: 1m DC cord, 2m detachable AC cord) × 1



## » Rechargeable Lithium Ion Battery

### BP-900A

**Nominal Voltage:** 7.2V DC

**Nominal Capacity:** 2100mAh

**Dimensions:** 71.6 (W) × 20.5 (H) × 37.5 (D) mm

**Weight:** 95g



## » Rack Mount Bracket

### MB-TS920

**Finish:** Surface-treated steel plate, black 30% gloss, paint,

**Dimensions:** 65.5 (W) × 177 (H) × 61 (D) mm

**Weight:** 680g

**Accessory:** Rack mounting screw x4, rack mounting washer x4



## » AC Adapter

### AD-0910

**Power Source:** 100 – 240V AC, 50/ 60Hz

**Output:** 9V DC, 1 A

**Ripple Voltage:** 100mV (p-p)

**Power Consumption:** 400mA AC, Input 100V

**Cord Length:** 1.8m

**Plug:** RC6705, center "+"

**Operating Temperature:** 0°C to +40°C

**Operating Humidity:** 90% RH or less (no condensation)

**Finish:** Case: Resin, black

**Weight:** 150g

**Accessory:** AC power cord (2m) × 1



## » Rack Mount Bracket

### MB-TS900

**Finish:** Surface-treated steel plate, gray metallic, paint, semi-gloss

**Dimensions:** 65.5 (W) × 177 (H) × 61 (D) mm

**Weight:** 680g

**Accessory:** Rack mounting screw x4, rack mounting washer x4



# TS-D1000 Series

## Master Control Unit

### TS-D1000-MU



Model	TS-D1000-MU
Power Source	100 – 240V AC, 50/60Hz (use of supplied AC adapter)
Power Consumption	60W or less
Audio Transmission System	Time division multiplexing (TDM), 10 channels 16 bit PCM, 32 kHz sampling frequency
MIC Input	-54 dB*, 600Ω, unbalance, ø6.3 phone jack (2 pins)
Output	LINE: -10dB*, 10kΩ, unbalance, ø6.3 phone jack (2P) REC: -10dB*, 10kΩ, unbalance, RCA pin jack, monaural HEADPHONE: ø3.5 mini jack, monaural
EQ Insert Input / Output Terminal	-10dB*, 10kΩ, unbalance, RCA pin jack
Video Conference System Input/ Output Terminal	-10dB*, 10kΩ, unbalance, RCA pin jack
No. of Connectable Chairman / Delegate Units	32 units* <sup>2</sup>
No. of Connectable Sub Control Units	5 units
Maximum Cable Distance	50m (between this unit and Chairman/Delegate unit at the end of daisy chain)* <sup>2</sup> 1m (between Master control unit and sub control units) (Use the cable supplied with sub control unit.)
Maximum No. of Open Microphone	2 chairman units, 8 delegate units
Chairman/Delegate Units Terminal	RJ45 connector x2
Sub Control Units Terminal	RJ45 connector
LED Indicator	Power indicator, Conference mode indicator, No. of open microphones indicators, Microphone auto off indicator, Monitor speaker of conference units volume indicators, Connection test indicator, External control indicator, Setting lock indicator, Recording status indicator, USB access status indicator, Internal memory status indicator, USB memory status indicator, Remaining internal memory capacity warning indicator, Remaining USB memory capacity warning indicator, LINK/ACT indicator, 10M/100M indicator

Function Key	No of open microphones selector key: 1/2/8 Microphone auto off setting key: ON/OFF Conference mode selector key: Standard/Override/Voice activation/Chairman Only Setting lock key: ON/OFF Monitor speaker of conference units volume setting key: -, +
Operation Key	Connection test, Rec start, Rec stop
Recording Parts	USB-A
Recording Function	Recordings can be made to a USB memory device* <sup>3</sup> or the internal memory. Recording format: MP3 (MPEG-1 Audio Layer-3), monaural Sampling frequency: 32 kHz, Bit rate: 128 kbps
Network I/F	10BASE-T/100BASE-TX (Automatic-Negotiation)
Network Protocol	TCP, HTTP, DHCP, ARP (APIPA), UDP (mDNS)
Network Connector	RJ45 connector
Operating Temperature	0°C to +40°C
Operating Humidity	90% RH or less (no condensation)
Finish	Panel: Surface-treated steel plate, black, 30% gloss, paint
Dimensions	361 (W) × 100.4 (H) × 184.2 (D) mm
Weight	2.2kg
Accessory	AC adapter (Cord length: 1.8m DC cord, and 2m detachable AC cord) × 1
Option	Rack mounting bracket: MB-TS920

\*<sup>1</sup> 0dB = 1V

\*<sup>2</sup> Cable lengths can be extended to a maximum of 100m with the use of the Extension unit

\*<sup>3</sup> A USB 2.0-compatible FAT32-formatted flash memory device of up to 32GB in capacity can be used. There may be cases in which a USB flash drive cannot be used with the TS-D1000-MU, depending on the drive's attributes or recording conditions

\*<sup>4</sup> Relevant control software is supplied on a custom-made basis

## Chairman Unit / Delegate Unit

### TS-D1000-CU/ TS-D1000-DU



Model	TS-D1000-CU	TS-D1000-DU
Power Source	24 V DC ( supplied from TS-D1000-MU Master control unit(option), TS-D1000-SU Sub control units (option) or TS-D1000-EX Extension unit (option))	
Power Consumption	1.5W or less	
Input	Microphone terminal: XLR-3-31 type	
Output	Monitor speaker: 8Ω, 0.4W Earphone: ø3.5 mini jack, (3P: monaural) x2	
Connecting Terminal	RJ45 connector x2	
LED Indicator	Power indicator, Speech indicator	
Function	Speech function, Priority speech function, Earphone volume control x2	Speech function, Earphone volume control x2
Operating Temperature	0°C to +40°C	
Operating Humidity	90% RH or less (no condensation)	
Finish	Case: ABS resin, black, mat finish, paint; Speaker net: black, mat finish, paint	
Dimensions	208.9(W) × 71.3(H) × 160.5(D) mm	
Weight	880 g	875 g
Option	Standard microphone: TS-D1000-M1; Long microphone: TS-D1000-M2	

## »» Standard Microphone Unit / Long Microphone Unit

## TS-D1000-M1/ TS-D1000-M2



Model	TS-D1000-M1	TS-D1000-M2
Type	Electret condenser microphone	
Directivity	Unidirectional	
Rated Impedance	1.4kΩ	
Rated Sensitivity	-37dB (1kHz, 0dB = 1V/ Pa)	
LED Indicator	Speech indicator (ring type) Red	
Frequency Response	100Hz – 13kHz	
Output Connector	Combined type of XLR-3-32	
Operating Temperature	0°C to +40°C	
Operating Humidity	90% RH or less (no condensation)	
Finish	Gooseneck: Stainless steel, black; Other: ABS resin, black	
Length	518 mm	668 mm
Weight	110g	125 g
Applicable Unit (Option)	Chairman Unit: TS-D1000-CU; Delegate Units: TS-D1000-DU	

## »» Extension Unit

## TS-D1000-EX



Model	TS-D1000-EX
Power Source	100 – 240V AC, 50/ 60Hz (use of the supplied AC adapter)
Power Consumption	25 W or less
Connection Terminal	RJ45 connector x2
LED Indicator	Power indicator
Operating Temperature	0°C to +40°C
Operating Humidity	90% RH or less (no condensation)
Finish	ABS resin, white (RAL 9003 equivalent)
Dimensions	124.3 (W) x 100.3 (H) x 35 (D) mm
Weight	150g
Accessory	AC adapter (Cord length: 1.8m cord, and 2m detachable AC cord x1)

## »» Sub Control Unit

## TS-D1000-SU



Model	TS-D1000-SU
Power Source	100 – 240V AC, 50/ 60Hz (use of the supplied AC adapter)
Power Consumption	80W or less
Number of Connectable Chairman/ Delegate Units	48 units
Chairman/ Delegate Units Terminal	RJ45 connector x3
Master/ Sub Control Units Terminal	RJ45 connector x2
Maximum Cable Distance	50m (between Sub control unit and terminal Chairman/ Delegate unit at end of daisy chain <sup>*1</sup> )

LED Indicator	Power indicator
Operating Temperature	0°C to +40°C
Operating Humidity	90% RH or less (no condensation)
Finish	Panel: Aluminum, black, 30% gloss, paint Case: Surface-treated steel plate, black, 30% gloss, paint
Dimensions	210 (W) x 45.8 (H) x 294.8 (D) mm
Weight	1.6 kg
Accessory	AC adapter (Cord length: 1.8m DC cord, and 2m detachable AC cord) x1, Connection cable (Cat5e STP, 1m) x1
Option	Rack mounting bracket: MB-15B-BK (for rack mounting one TS-D1000-SU unit), MB-15B-J ( for rack mounting two TS-D1000-SU units)

<sup>\*1</sup> Cable lengths can be extended to a maximum of 100m with the use of the Extension unit



# Microphone (Wireless)

## UHF Wireless Systems and Optional Accessories

### »» UHF Hand-Held Wireless Microphone

### WM-5270 / WM-5265 / WM-5225



Model	WM-5270 (Vocal)	WM-5265 (Vocal)	WM-5225 (Speech)
Microphone Element	Dynamic microphone unit: Unidirectional		Electret condenser microphone unit: Unidirectional
Modulation	Frequency modulation		
Frequency Response	576 – 865 MHz, UHF	576 – 937.5 MHz, UHF	
Channel Selectable	64 channels (the number of channels may differ from country to country.)		
RF Carrier Power	Less than 50mW (factory preset 10mW ERP)		
Tone Frequency	32.768kHz		
Oscillator	PLL synthesized		
Max. Input Level	142dB SPL	132dB SPL	126dB SPL
Max. Deviation	±40kHz		
Audio Frequency Response	80Hz – 15kHz	100Hz – 15kHz	100Hz – 15kHz
Dynamic Range (AF Circuit)	95dB or more (with WT-5800)		
Battery	AA alkaline dry cell battery	WB-2000 rechargeable battery (option) or AA alkaline dry cell battery	
Battery Life	Approx. 10h (when the alkaline battery is used)	Approx. 13h (when the WB-2000 rechargeable battery is used) Approx. 10h (when the alkaline battery is used)	
Indicator	Power/ Battery lamps		
Antenna	Built-in type		
Operating Temperature	–10°C to +50°C	–10°C to +50°C (except battery)	
Operating Humidity	30% to 85% RH (no condensation)		
Finish	Dark gray	Resin, coating	
Dimensions	ø48 × 244 mm	ø50 × 229 mm	ø43.6 × 231.5 mm
Weight	340g (with battery)	205g (with battery)	180g (with battery)
Accessory	Microphone holder (with stand adapter) × 1, Screw driver (housed in the body) × 1, Storage case × 1, Rolling stopper × 1	Microphone holder W3/8" (with stand adapter) × 1, Screw driver × 1, Storage case × 1	Microphone holder W3/8" (with stand adapter) × 1, Screw driver × 1, Storage case × 1

### »» UHF Wireless Transmitter

### WM-5325



Model	WM-5325
<b>Modulation</b>	Frequency modulation
<b>Frequency Range</b>	576 – 937.5 MHz <sup>*1</sup> , UHF
<b>Channel Selectable</b>	64 channels (the no. of channels may differ from country to country)
<b>RF Carrier Power</b>	Less than 50mW (factory preset 10mW ERP)
<b>Tone Frequency</b>	32.768kHz
<b>Oscillator</b>	PLL synthesized
<b>Max. Input Level</b>	–14dB to –29dB <sup>*2</sup> (Audio level control: Min. to Max.)
<b>Max. Deviation</b>	±40 kHz
<b>Audio Frequency Response</b>	100Hz – 15kHz
<b>Battery</b>	WB-2000 rechargeable battery or AA alkaline dry cell battery
<b>Battery Life</b>	Approx. 13h (when WB-2000 rechargeable battery is used) Approx. 10h (when alkaline battery is used)

<b>Indicator</b>	Power/ Battery lamps
<b>Antenna</b>	Built-in type
<b>Connector</b>	ø3.5mm mini plug
<b>Operating Temperature</b>	–10°C to +50°C (except battery)
<b>Operating Humidity</b>	30% to 85% RH (no condensation)
<b>Finish</b>	Resin, coating
<b>Dimensions</b>	62 (W) × 102.5 (H) × 23 (D) mm
<b>Weight</b>	90g (with battery)
<b>Accessory</b>	Screw driver × 1, Storage case × 1, Neck strap × 1
<b>Option</b>	Lavalier microphone: YP-M5300 (unidirectional), YP-M5310 (omnidirectional) Headset microphone: WH-4000A, WH-4000H

<sup>\*1</sup> Frequency range dependent on individual country regulatory codes.

<sup>\*2</sup> 0dB = 1V

### Uni-Directional Lavalier Microphone

## YP-M5300



### Omni-Directional Lavalier Microphone

## YP-M5310



### Headset Microphone

## WH-4000H



### Headset Microphone

## WH-4000A



Model	YP-M5300	YP-M5310	WH-4000H	WH-4000A
Type	Electret condenser type			
Directivity	Unidirectional	Omnidirectional	Unidirectional	Unidirectional
Sensitivity	-63dB ±3dB (0dB = 1V/0.1 Pa, 1kHz)	-64dB ±3dB (0dB = 1V/0.1 Pa, 1kHz)	-66dB ±3dB (0dB = 1V/0.1 Pa, 1kHz)	-66dB ±3dB (0dB = 1V/0.1 Pa, 1kHz)
Frequency Response	100Hz – 12kHz	100Hz – 15kHz	-	-
Max. Input Level	120dB SPL	110dB SPL	120dB SPL	
Cable Length	1.3m			
Terminal	ø3.5mm mini plug		ø3.5mm monaural plug	
Finish	Dark black		Frame: Stainless, black (silicon rubber) Gooseneck: black (shrink tube)	Headband: EVA, black Frame: Stainless, black (silicon rubber) Gooseneck: black (shrink tube)
Weight	20g (cable included)		50g (cable included)	

Note: \*WH-4000H and WH-4000A are expendable items. No warranty is provided for any trouble except incipient failure.

\*Windscreen is also available as optional parts.

### Ear-Hook Microphone

## YP-M5000E

Type: Electret Condenser type

Directivity: Omnidirectional

Frequency Response: 20 Hz - 20 kHz

Sensitivity: -67 dB  $\pm$ 3 dB (0 dB = 1V/O, 1Pa, 1 kHz)

Max. Input Level: 115 dB SPL, 1 kHz at 1%

Cord Length: 1.3m (4.27 ft)

Terminal:  $\phi$ 3.5mm (0.14") Stereo plug

Finish: Beige color

Weight: 14g or 0.49 oz (cable included)



### Headset Microphone

## YP-M5000H

Type: Electret Condenser type

Directivity: Omnidirectional

Frequency Response: 20 Hz - 20 kHz

Sensitivity: -67 dB  $\pm$ 3 dB (0 dB = 1V/O, 1Pa, 1 kHz)

Max. Input Level: 115 dB SPL, 1 kHz at 1%

Cord Length: 1.3m (4.27 ft)

Terminal:  $\phi$ 3.5mm (0.14") Stereo plug

Finish: Beige color

Weight: 21g or 0.74 oz (cable included)



### Microphone Waist Holder

## WH-4000P

Length: 800mm (1300mm at full extension)

Finish: Elastic cloth, Black



### Microphone Windscreen (10pcs/set)

## WH-4000S

Finish: Urethane form, Black

Applicable Model (option): Headset Microphone:

WH-4000A, WM-4000H

Personal PA system: ER-1000



### UHF Portable Receiver

## WT-5100



Model	WT-5100
Power Source	1.5V DC (Battery)
Frequency Range	576 - 865MHz, UHF
Channel Selectable	16 selectable frequencies
Receiving System	Double super-heterodyne
Receiving Sensitivity	Better than 60dB S/N ratio (20dB $\mu$ V input, $\pm$ 40kHz deviation)
Frequency Response	200Hz - 5kHz (Portable transmitter to Portable receiver)
De-emphasis	50 $\mu$ s
Output Level	4mW (16 $\Omega$ load, 10% distortion)
Battery	WB-2000-2 rechargeable battery or LR6/ AA alkaline dry cell battery

Battery Life	16h (when WB-2000-2 rechargeable battery is used) 15h (when alkaline battery is used)
Operating Temperature	-10°C to +50°C (except battery)
Operating Humidity	30% to 85% RH (no condensation)
Finish	Resin, dark silver
Dimensions	62 (W) $\times$ 163.6 (H) $\times$ 32.5 (D) mm
Weight	125g (battery included)
Accessory	Neck strap $\times$ 1
Option	Ni-MH battery: WB-2000-2 Ear-suspension earphone: YP-E401 Assist earphone: YP-E5000

\* When using an earphone not made by TOA, use the one with a  $\phi$ 3.5mm plug and impedance of over 16 $\Omega$ .

### Ear-Suspension Earphone

## YP-E401

Type: Dynamic type

Impedance: 16 $\Omega$

Frequency Response: 300Hz - 15kHz

Rated Sensitivity: 88dB (0dB = 2  $\times$  10<sup>-5</sup>Pa, 1kHz, 10mW)

Input: Max. 50 mW

Terminal:  $\phi$ 3.5mm monaural plug

Finish: Black

Weight: 17g

Accessory: Ear-pad  $\times$  1, Suspension ring  $\times$  2



### Assist Earphone

## YP-E5000

Type: Dynamic type

Impedance: 16 $\Omega$

Frequency Response: 300Hz - 15kHz

Rated Sensitivity: 88dB (0dB = 2  $\times$  10<sup>-5</sup>Pa, 1kHz, 10mW)

Input: Max. 50 mW

Terminal:  $\phi$ 3.5mm mini plug (3-pole)

Finish: Black

Weight: 17g

Accessory: Ear-pad  $\times$  1, Suspension ring  $\times$  2



» UHF Wireless Tuner

WT-5800  
WT-5805  
WT-5810



\* 0dB= 1V

Model	WT-5800	WT-5805	WT-5810
Power Source	AC mains (supplied AC adapter must be used)		
Power Consumption	250mA (12V DC)	200mA (12V DC)	130mA (12V DC)
Receiving Frequency	576-865 MHz, UHF	576-937.5MHz, UHF	576 - 865 MHz, UHF
Channel Selectable	64 Selectable frequencies		16 channels
Receiving System	Double Super-heterodyne		
Diversity System	Space diversity (true diversity)	Space diversity	
Mixing Output	MIC/LINE (selectable): -60dB* (MIC) / -20dB* (LINE), 600Ω phone jack (unbalanced), 600Ω, XLR-3-32 type connector (balanced)		MIC: -60dB*, 600Ω, balanced, XLR-3-32 type connector LINE: -20dB*, 600Ω, unbalanced, phone jack
Mixing Input	-20dB*, 10kΩ, unbalanced, phone jack		
Antenna	-		Whip antenna
Antenna Input	75Ω, BNC (phantom powering for antenna), 9V DC, 30mA (max.)		-
Antenna Output	75Ω, BNC (Gain 0dB)		-
Receiving Sensitivity	90dB or more, S/N ratio (20dBμV input, 40kHz deviation)		
Squelch Sensitivity	16 - 40dBμV variable		
Squelch System	Using together of noise SQ, carrier SQ and tone SQ		
Tone Frequency	32.768kHz		
Indicator	Audio (6 steps), RF (6 steps), ANT A/B, Audio (peak), Battery alarm		ANT A/B, Audio (peak), battery alarm, channel no.
Channel Check	Usable frequencies scanning		
S/N Ratio	110dB or more (A-weight, unbalanced output)		104dB or more (A-weight, unbalanced output)
Harmonic Distortion	1% or less (typical)		
Frequency Response	100Hz - 15kHz, ±3 dB		
Operating Temperature	-10°C to +50°C		
Operating Humidity	30% to 85% RH (no condensation)		
Finish	Resin, black		
Dimensions	210 (W) × 44 (H) × 205 (D) mm		206 (W) × 40.6 (H) × 152.7 (D) mm
Weight	700g		590g
Accessory	AC adapter × 1, Whip antenna × 2, Rubber foot × 4		AC adapter × 1
Option	Mounting bracket kit: MB-WT3 (for rack mounting one unit), MB-WT4 (for rack mounting two units)		-

» UHF Wireless Tuner

WT-4820



\* 0dB = 1V

Model	WT-4820	
Power Source	AC mains (supplied AC adapter must be used)	
Power Consumption	250mA (12V DC when operating with two tuner modules)	
Receiving Frequency	576 - 865 MHz*, UHF	
Mixing Input	-20dB*, 10kΩ, unbalanced, phone jack	
Audio Output	Mixing/Channel 1 (selectable): -20dB* (+6dB* Max.), 600Ω, unbalanced, phone jack -14dB* (+12dB* Max.), 600Ω, balanced, XLR-3-32 type connector Channel 2: -20dB* (+6dB* Max.) 600Ω, unbalanced, phone jack	
Antenna Input	75Ω, BNC (phantom powering for antenna) 9V DC, 30mA (max.)	
Antenna Output	75Ω, BNC (Gain 0dB)	
Indicator	ANT A/B, Audio (peak), Power	
S/N Ratio		102dB or more (A-weight, balanced output)
Harmonic Distortion		1% or less
Frequency Response		50 - 18kHz, ±3dB
Operating Temperature		-10°C to +50°C
Operating Humidity		30% to 85% RH (no condensation)
Finish		Resin, black
Dimensions		210 (W) × 44 (H) × 181 (D) mm
Weight		770g (without tuner module)
Accessory		AC adapter × 1, Whip antenna × 2, Rubber foot × 4
Option		Mounting bracket kit: MB-WT3 (for rack mounting one unit), MB-WT4 (for rack mounting two units)

» Antenna Distributor

WD-5800



Model	WD-5800	
Power Source	AC mains (supplied AC adapter must be used)	
Power Consumption	25W or less	
Current Consumption	1.6A (12 - 15V DC)	
Frequency Range	VHF/ UHF	
Antenna Input	2 inputs per distribution channel (front × 1, rear × 1), 75Ω, BNC (phantom powering for antenna)	
Antenna Output	4 output per distribution channel, 75Ω, BNC	
DC Power Supply	4 output, (each output: 12V DC/250mA) (Output voltage of this unit depends on that of AC adapters.)	
Indicator		Power lamp
Operating Temperature		-10°C to +50°C
Finish		Panel: Aluminum, black, paint Case: Steel, black, paint
Dimensions		420 (W) × 44 (H) × 214 (D) mm
Weight		2kg
Accessory		AC adapter × 1, Power cord (2m) × 1, DC cable × 4, Rubber foot × 4
Option		Rack mounting bracket: MB-15B

## »» Battery Charger BC-5000-2



**Power Source:** 12V DC (optional AC adapter AD-5000-2 must be used)  
**Power Consumption:** 700mA  
**Charging Time:** Max. 3h  
**No. of Wireless Microphone to be Charged Simultaneously:** 2 pieces  
**Operating Temperature:** 0°C to +40°C  
**Operating Humidity:** 30% to 85% RH (no condensation)  
**Finish:** Case: ABS resin, gray  
 Microphone receptacle section: PPE resin, black  
**Dimensions:** 238 (W) × 105 (H) × 98 (D) mm (including mounting adapter)  
**Weight:** 500g (with mounting adapters attached)  
**Accessory:** Mounting adapter × 2  
**Option:** Rechargeable battery: WB-2000-2 (containing 2 pieces)  
 AC adapter: AD-5000-2

## »» Battery Charger BC-5000-12



**Power Source:** 12V DC (optional AC adapter AD-5000-6 must be used)  
**Power Consumption:** 4.4 A  
**Charging Time:** Max. 3 h  
**Number of Wireless Microphone to be Charged Simultaneously:** 12 pieces  
**Operating Temperature:** 0°C to +40°C  
**Operating Humidity:** 30% to 85% RH (no condensation)  
**Finish:** Case: Steel plate, black, paint  
 Microphone receptacle section: ABS resin, black  
**Dimensions:** 390 (W) × 118 (H) × 246 (D) mm (including mounting adapter)  
**Weight:** 3.4kg (with mounting adapters attached)  
**Accessory:** Mounting adapter × 12  
**Option:** Rechargeable battery: WB-2000-2 (containing 2 pieces)  
 AC adapter: AD-5000-6

## »» AC Adapter AD-5000-2



**Power Source:** 100 – 240V AC, 47 –63Hz, 1A  
**Output:** 12V DC, 2 A  
**Ripple Voltage:** 120mV p-p  
**Cord Length:** 1.8m  
**Plug:** Dependent on the country where the unit is used  
**Operating Temperature:** 0°C to +40°C  
**Finish:** Case: PC/ABS alloy, Black  
**Weight:** 175g  
**Accessory:** Power cord (2m) × 1

## »» UHF Wireless Antenna (Wall Mountable) YW-4500



**Power Source:** 7 – 12V DC (supplied from amplifier or tuner)  
**Current Consumption:** 15mA or less  
**Receiving Frequency:** 550 – 932 MHz, UHF  
**Dipole Ratio Relative Gain:** 8dB or more (780 MHz)  
**VSWR:** 3.0 or less  
**Output Impedance:** 75Ω  
**Mounting Hole Pitch:** 83.5 mm (dimensions for wiring box)  
**Operating Temperature:** -10°C to +50°C  
**Finish:** ABS resin, off-white  
**Dimensions:** 105 (W) × 140 (H) × 126 (D) mm  
**Weight:** 270g  
**Accessory:** M3.5 screw for wiring box × 2, Tapping screw (M4) for wooden wall × 2, RG-6/U or RG-11/U sleeve × 1

## »» Battery Charger BC-5000-6



**Power Source:** 12V DC (optional AC adapter AD-5000-6 must be used)  
**Power Consumption:** 2.2 A  
**Charging Time:** Max. 3h  
**No. of Wireless Microphone to be Charged Simultaneously:** 6 pieces  
**Operating Temperature:** 0°C to +40°C  
**Operating Humidity:** 30% to 85% RH (no condensation)  
**Finish:** Case: Steel plate, black, paint  
 Microphone receptacle section: ABS resin, black  
**Dimensions:** 390 (W) × 118 (H) × 131 (D) mm (including mounting adapter)  
**Weight:** 2kg (with mounting adapters attached)  
**Accessory:** Mounting adapter × 6  
**Option:** Rechargeable battery: WB-2000-2 (containing 2 pieces)  
 AC adapter: AD-5000-6

## »» Ni-MH Rechargeable Battery WB-2000-2



**Nominal Voltage:** 1.2V DC  
**Capacity:** 1900 mAh (rated), 2000 mAh (typical)  
**Operating Temperature:** 0°C to +40°C  
**Operating Humidity:** 30% to 85% RH (no condensation)  
**Dimensions:** ø14.2 × 50.2mm  
**Weight:** 30g

## »» AC Adapter AD-5000-6



**Power Source:** 100 – 240V AC, 47 –63Hz, 2A  
**Output:** 12V DC, 5A  
**Ripple Voltage:** 120mV p-p  
**Cord Length:** 1.8m  
**Plug:** Dependent on the country where the unit is used  
**Operating Temperature:** 0°C to +40°C  
**Finish:** Case: PC/ABS alloy, Black  
**Weight:** 300g  
**Accessory:** Power cord (2m) × 1

## »» UHF Wireless Tuner Unit WTU-4800



**Power Requirement:** 7 – 12V DC  
**Current Consumption:** 100mA  
**Receiving Frequency:** 576 – 865 MHz, UHF  
**Receiving System:** Double Super-Heterodyne  
**Receiving Sensitivity:** 80dB or more, S/N Ratio (20dB μV input, 40kHz deviation)  
**Antenna Input Impedance:** 75Ω  
**Diversity System:** Space diversity  
**Channel Selectable:** 16 Channels  
**Squelch System:** Noise SQ  
**Squelch Sensitivity:** 17dB μV  
**Output:** 0dB\* max. deviation, 2.2kΩ load)  
**Harmonic Distortion:** 1% or less  
**Frequency Response:** 100Hz – 12kHz, ±3 dB  
**Operating Temperature:** -10°C to +50°C  
**Operating Humidity:** 30% to 85% RH (no condensation)  
**Finish:** Surface-treated steel plate  
**Dimensions:** 60 (W) × 25 (H) × 139 (D) mm  
**Weight:** 130kg  
**Accessory:** Driver for channel changing × 1

\* 0dB = 1V

» VHF Wireless Antenna

YW-3500

**Power Source:** 8 – 10V DC  
(supplied from amplifier or tuner)  
**Current Consumption:** 24mA or less  
**Receiving Frequency:** 168 – 216 MHz  
**Dipole Ratio Relative Gain:** 6dB  
(including booster amplifier)  
**VSWR:** 2.6 or less  
**Output Impedance:** 75Ω  
**Mounting Hole Pitch:** 68.5 mm  
(dimensions for wiring box)  
**Operating Temperature:** -10°C to +50°C  
**Finish:** Antenna/bracket ABS resin, off-white  
**Dimensions:** 197 (W) x 850 (H) x 32 (D) mm  
**Weight:** 200g  
**Accessory:** Tapping screw (M4) for wooden wall x 2,  
M3.5 screw for wiring box x 2, RG-59/U sleeve x 1



» UHF/VHF Wireless Antenna

YW-3510

**Receiving Frequency:** VHF (longest): 169 - 216 MHz  
UHF (shortest): 690 - 865 MHz  
**Antenna Gain:** Approx. -3 dBd  
**Output Impedance:** 75Ω  
**Output Connector:** BNC plug  
**Finish:** Antenna element: Chrome plated brass  
Other: Nickel-plated brass  
**Dimensions:** Antenna element length:  
(for VHF) 378 mm, (for UHF) 108 mm  
Maximum connector diameter: φ15 mm  
**Weight:** 27g



Infrared Wireless Microphone Systems

» Classroom Amplifier

SA-112



\* 0dB = 1V

Model	SA-112
Power Source	DC 24V /1A
Amplification System	Class D
Power Consumption	2W (1kHz sine wave) 5.6W (1/8 rated output)
Maximum output	12W (100V)
Output impedance	833Ω
Frequency Response	50Hz - 20kHz (-6dB@50H, -7dB@20kHz)
Distortion	0.15%
S/N Ratio	75dB or more (A-Weighted)
Protection	Protection against over heat, excessive current flow, output short circuit (Automatically resume after fault resolution)
Input	MIC1 / IR (Front Panel): -60dB*, 600Ω, Balanced (Phone Jack) MIC2 (Front Panel): -60dB*, 600Ω, Balanced (Phone Jack) AUX (Front Panel): -20dB*, 10kΩ, 3.5mm Stereo Mini Jack LINE (Rear Panel): -20dB*, 10kΩ, Unbalance RCA Pin Jack IR (Rear Panel): RJ45 (For IR-701TA CE) EXT(Emergency Input): +40dB* (100V), Maximum Input Power 12W EXT has the highest priority

Tone control	BASS: ±10dB at 100Hz TREBLE: ±10dB at 10kHz
EXT Input Sensitivity Control	SENSE: MIN (Emergency paging start when EXT input higher than 10V) ; MAX (Emergency paging start when EXT input higher than 30V)
Indicator	SIG OUT (Yellow LED) : Lights when signal out PROTECT (Red LED) : Lights when protection circuit activate) SIG IN (Green LED) : Lights when signal in POWER (Green LED) : Lights when the power is switched on
Operating Temperature	-10°C to +40°C
Operating Humidity	Less than 90%RH
Dimensions	210 (W) x 44 (H) x 204.5 (D) mm
Weight	800g
Finish	Upper case: ABS resin (Black), Lower case: ABS resin (Black)
Accessory	TOA sticker x1
Option	AC Adapter AD-246, Wall mount bracket (Q-MA-SA112), 1CH Infrared wireless microphone system: IR-701TA, IR-201M

» Infrared Hand-Held Wireless Microphone / Infrared Hands-Free Wireless Microphone

IR-200M

IR-300M



Model	IR-200M	IR-300M
Battery	IR-200BT-2 rechargeable battery for the infrared wireless microphone or AA alkaline dry cell battery (2 pieces).	
Current Consumption	Typ. 250 mA (2.4 V, Power selector switch: N), Typ. 340 mA (2.4 V, Power selector switch: H)	
Infrared Emitter	870 nm (AM: Brightness modulation) Frequency modulation Channel A: 3.100 MHz, Channel B: 3.350 MHz Approx. 20m (Power selector switch: H; In an unobstructed space.) Approx. 15m (Power selector switch: N; In an unobstructed space.)	
Wavelength	32.768 kHz	
Modulation Method	±4.8kHz (1kHz, when SPL of 84dB is input)	
Carrier Frequency	120dB SPL	
Transmission Distance	Adjustment range: -9dB to 0dB (factory preset: 0dB)	
Tone Signal	Unidirectional electret condenser microphone	
Modulation Sensitivity	100Hz – 12kHz	
Max. Input Sound Pressure	300 μs	
Input Sensitivity Adjustment	-	
Microphone Unit	External microphone input (ø3.5mm monaural mini jack)	
Frequency Response	Approx. 8 hours (when the IR-200BT rechargeable battery for the infrared wireless microphone is used, Power selector switch: N) Approx. 6 hours (when the alkaline battery is used; Power selector switch: N)	
Preemphasis	0°C to +40°C	
Input	30 to 85% RH	
Battery Operation Time	Control Section: ABS resin, metallic gray, 50% gloss, paint; Filter Section: Polycarbonate, optical cut filter	
Operating Temperature	ø37 x 241.8 (H) mm	
Operating Humidity	64 (W) x 91.3 (H) x 27.3 (D) mm	
Finish	170g (with battery)	
Dimensions	130g (with battery & strap)	
Weight	Screwdriver (for setting) x 1, Color label (6 colors) x 1	
Accessory		



## »» Infrared Wireless Receiver

IR-701T  
IR-701TA

Model	IR-701T	IR-701TA
<b>Power Source</b>	AC 220 V, 50 Hz (With specific transformer)	DC 13.8 V (SA-112 provide the power)
<b>Power Consumption</b>	Below 2W	
<b>Infrared Detector</b>	870 nm 3.10 MHz Approx. 15m ( In an unobstructed space)	
<b>Connection Terminal</b>	RCA jack	RJ 45
<b>Operating Temperature</b>	0°C to +40°C	
<b>Finish</b>	Base: ABS resin, White ; Filter: Polycarbonate resin, optical cut filter	
<b>Dimensions</b>	210 (W) x 46 (H) x 312 (D) mm	
<b>Weight</b>	Approx. 300 g	
<b>Accessories</b>	Specific transformer x 1	-
<b>Option</b>	IR-201M	

## »» Infrared Wireless Tuner

## IR-702T



\* 0dB = 1V

Model	IR-702T
<b>Power Source</b>	AC mains, 50/60Hz (use of the supplied AC adapter)
<b>Power Consumption</b>	15W or less
<b>Receiving Frequency</b>	Channel A: 3.100 MHz, Channel B: 3.350 MHz
<b>Receiver Sensitivity</b>	S/N ratio: 50dB or more (40dB $\mu$ V input, 1kHz modulation, $\pm$ 4.8 kHz deviation)
<b>S/N ratio</b>	61dB or more (60dB $\mu$ V input, $\pm$ 4.8 kHz deviation, A-weighted)
<b>Tone Squelch Frequency</b>	32.768kHz
<b>Infrared Receiver Input</b>	75 $\Omega$ , BNC jack x 2 (Infrared wireless receiver's power source: 24V DC, 220 mA max. in total of 2 terminals)
<b>No. of Connectable Conference Receiver</b>	4 (YW-1022/YW-1024) 16 (IR-700D, YW-1024 x 4)
<b>Output</b>	Channel A and B: -10dB* ( $\pm$ 4.8kHz deviation, at volume level max.), 600 $\Omega$ , electronically balanced, 3 pole phone jack Note: Channel A switchable to mixer output

<b>Frequency Response</b>	100Hz – 12kHz
<b>Operating Temperature</b>	-10°C to +50°C
<b>Operating Humidity</b>	30% to 85% RH (no condensation)
<b>Finish</b>	Case: ABS resin, black
<b>Dimensions</b>	210 (W) x 44 (H) x 210.9 (D) mm
<b>Weight</b>	630g (unit only)
<b>Accessory</b>	AC Adapter (DC cord length: 1.8m) x 1, Power cord (2m) x 1, Cord with a phone plug (1m) x 1, Color label (6 colors) x 1, Rubber foot x 4
<b>Option</b>	Rack mounting bracket: MB-WT3, MB-WT4 (for mounting with the optional IR-700D together)

## »» Infrared Wireless Distributor

## IR-700D



Model	IR-700D
<b>Power Source</b>	AC mains, 50/60Hz (use of the supplied AC adapter)
<b>Power Consumption</b>	25W or less
<b>Input/Output</b>	4 mixing inputs, 2 distribution outputs
<b>Band-Pass Frequency</b>	3.0 – 6.0 MHz
<b>Gain</b>	0dB ( $\pm$ 3dB)
<b>Infrared Receiver Input</b>	75 $\Omega$ , BNC jack x 4 (Infrared wireless receiver's power source: 24V DC, 800 mA max. in total of 4 terminals)
<b>No. of Connectable Conference Receiver</b>	16 (YM-1024 x 4)
<b>Distribution Output</b>	75 $\Omega$ , BNC jack
<b>Operating Temperature</b>	-10°C to +50°C

<b>Operating Humidity</b>	30% to 85% RH (no condensation)
<b>Finish</b>	Case: ABS resin, black
<b>Dimension</b>	210 (W) x 44 (H) x 200.9 (D) mm
<b>Weight</b>	640g (unit only)
<b>Accessory</b>	AC adapter (DC cord length: 1.8m) x 1, Power cord (2m) x 1, BNC plug-to-BNC plug cord (50 cm) x 1, Rubber foot x 4
<b>Option</b>	Rack mounting bracket: MB-WT3, MB-WT4 (for mounting with the optional IR-702T together)

## »» RF Distributor

## YW-1022



**Frequency Range:** 1.6 – 1,000 MHz (excluding 50 – 70 MHz)  
**Distribution Loss:** 4.5dB  $\pm$ 3dB (between the Mixing and each Distribution terminals)  
**Input/Output Impedance:** 75 $\Omega$   
**Coaxial Connector:**  
 Mixing terminal: BNC jack, power passing type (30V DC or less, under 2A or less)  
 Distribution 1 and 2 terminals: BNC jack, power passing type (30V DC or less, 1A or less)  
**Operating Temperature:** -10°C to +50°C  
**Operating Humidity:** 90% RH or less (no condensation)  
**Finish:** ABS resin, gray  
**Dimensions:** 75 (W) x 122 (H) x 34 (D) mm  
**Weight:** 105g  
**Accessory:** Unit fixing wood screw (4.1 x 25) x 2

## »» RF Distributor

## YW-1024



**Frequency Range:** 1.6 – 1,000 MHz (excluding 50 – 70 MHz)  
**Distribution Loss:** 8.5dB  $\pm$ 3dB (between the Mixing and each Distribution terminal)  
**Input/Output Impedance:** 75 $\Omega$   
**Coaxial Connector:**  
 Mixing terminal: BNC jack, power passing type (30V DC or less, 2A or less)  
 Distribution 1 - 4 terminals: BNC jack, power passing type (30V DC or less, 1A or less)  
**Operating Temperature:** -10°C to +50°C  
**Operating Humidity:** 90% RH or less (no condensation)  
**Finish:** ABS resin, gray  
**Dimensions:** 75 (W) x 122 (H) x 34 (D) mm  
**Weight:** 120g  
**Accessory:** Unit fixing wood screw (4.1 x 25) x 2

## » Infrared Hand-Held Wireless Microphone

### IR-201M



Model	IR-201M
<b>Battery</b>	AA alkaline dry cell battery DC 1.5V x2 or Ni-MH rechargeable battery DC 1.2V x2
<b>Infrared Emitter</b>	
Wavelength	870 nm (AM: Brightness modulation)
Modulation Method	FM modulation
Carrier Frequency	3.100 MHz
Transmission Distance	Approx. 15m (In an unobstructed space)
<b>Modulation Sensitivity</b>	±40kHz
<b>Maximum Input Sound Pressure</b>	126 dB SPL
<b>Microphone Unit</b>	Unidirectional condenser microphone
<b>Frequency Response</b>	100 Hz - 16 kHz

## » Tie-Clip Microphone

### YP-M101

**Type:** Electret condenser type  
**Directivity:** Unidirectional  
**Sensitivity:** -46dB (0dB = 1V/Pa, 1kHz, load: 2kΩ)  
**Maximum Input Level:** 115dB SPL  
**Terminal:** ø3.5 mm mono mini plug  
**Finish:** Dark gray  
**Weight:** 20g (cable included)  
**Accessory:** Clip x 1



## » Close-Talking Microphone

### YP-M201

**Type:** Electret condenser type  
**Directivity:** Unidirectional  
**Sensitivity:** -57dB (0dB = 1V/Pa, 1kHz, load: 2kΩ)  
**Maximum Input Level:** 115dB SPL  
**Terminal:** ø3.5 mm stereo plug  
**Finish:** Black  
**Weight:** 20g (cable included)  
**Accessory:** -



## » Headset Microphone

### YP-M301

**Type:** Electret condenser type  
**Directivity:** Unidirectional  
**Sensitivity:** -44dB (0dB = 1V/Pa, 1kHz, load: 2kΩ)  
**Maximum Input Level:** 115dB SPL  
**Terminal:** ø3.5 mm monaural plug  
**Finish:** Headband: ABS resin, black  
**Weight:** 45g  
**Accessory:** Storage case x 1, Windscreen x 2



## » Battery Charger

### IR-200BC

**Power Source:** AC mains, 50/60Hz  
(supplied from the enclosed AC adapter)  
**Power Consumption:** Max. 2 A  
**Charging Time:** Max. 3 hours  
**Number of wireless microphones to be charged simultaneously:** 2 pieces\*  
**Operating Temperature:** 0 to +40 °C  
**Operating Humidity:** 30% to 85% RH (no condensation)  
**Finish:** Case: ABS resin, metallic gray, 50% gloss, paint  
Microphone receptacle section: PPE resin, black  
**Dimensions:** 238 (W) x 109.5 (H) x 98 (D) mm  
**Weight:** 635g (unit, including mounting adapter)  
Using the mounting adapter allows one each of the IR-200M and IR-300M to be charged in combination.



## » NI-MH Battery

### IR-200BT-2Y

**Nominal Voltage:** 1.2V DC  
**Nominal Capacity:** Min. 2300 mAh  
**Operating Temperature:** 0°C to +40°C  
**Operating Humidity:** 30% to 85% RH  
**Dimensions:** ø14.2 x 50.2 mm  
**Weight:** 30g (per piece)



## » Infrared Wireless Receiver

### IR-500R

### IR-510R

### IR-520R



Model	IR-500R	IR-510R	IR-520R
<b>Power Source</b>	24V DC (supplied from IR-702T)		
<b>Current Consumption</b>	Max. 40 mA	Max. 60 mA	Max. 30 mA
<b>Infrared Detector</b>			
Wavelength	870 nm	870 nm	870 nm
Carrier Frequency	Channel A: 3.100 MHz, Channel B: 3.350 MHz	Channel A: 3.100 MHz, Channel B: 3.350 MHz	Channel A: 3.100 MHz, Channel B: 3.350 MHz
Reception Angle	Vertical: 80° (Up to 30° movable downward) Horizontal: 80° (Up to 30° movable left or right)	-	-
Communication Area	Approx. 15m (in a space without any obstacles)	Approx. 7m in radius from the point underneath the unit (Ceiling height: 2.5 - 3.0m, in a space without any obstacles)	Approx. 15m (in a space without any obstacles)
<b>Connection Terminal</b>	75Ω, BNC jack		
<b>Operating Temperature</b>	0°C to +40°C		
<b>Operating Humidity</b>	30% to 80% RH (no condensation)	30% to 85% RH (no condensation)	
<b>Finish</b>	Filter section: Polycarbonate, optical cut filter Base: ABS resin, off-white	Filter section: Polycarbonate, optical cut filter Base: ABS resin, black	Filter section: Polycarbonate, optical cut filter
<b>Dimensions</b>	70 (W) x 120 (H) x 72 (D) mm	ø120 x 71.3 (H) mm	84.5 (W) x 63.5 (H) x 32 (D) mm
<b>Weight</b>	220g (unit only)	205g (unit only)	100g (unit only)
<b>Accessory</b>	-	Mounting bracket x 1	Stand mounting bracket x 1, Bracket mounting screw x 2



## S4.04 & S4.10 Series

» S4.04 UHF Wireless Microphone System / S4.10 UHF Wireless Microphone System

**S4.04-HD-EA**

**S4.04-L-EA**

**S4.10-HD-EA**

**S4.10-L-EA**



\* 0dB = 0.775V

Model	S4.04-HD-EA	S4.04-L-EA	S4.10-HD-EA	S4.10-L-EA
Microphone Unit	Dynamic with cardioid pattern	TRANTEC series lavalier microphone	Dynamic with cardioid pattern	TRANTEC series lavalier microphone
RF Carrier Power	10mW	10mW	10mW	10mW
Audio Frequency Response	80 - 15 kHz	50 - 15 kHz	80 - 15 kHz	50 - 15 kHz
Audio Input Level	140 dB SPL (Max)	-6 dBV (Max), mic gain 0dB	140 dB SPL (Max)	-6 dBV (Max), mic gain 0dB
Modulation System	PLL synthesizer	PLL synthesizer	PLL synthesizer	PLL synthesizer
Battery Life	Approx. 10 hours	Approx. 10 hours	Approx. 10 hours	Approx. 10 hours
Battery	1 AA size alkaline battery, 1.5V	1 AA size alkaline battery, 1.5V	1 AA size alkaline battery, 1.5V	1 AA size alkaline battery, 1.5V
Indicator	Battery status LED, 7segments LED	Battery status LED, 7segments LED	Battery status LED, 7segments LED	Battery status LED, 7segments LED
Finish	Resin, coating	Resin, coating	Resin, coating	Resin, coating
Dimensions	Ø55 x 250 mm	62(W) x 100(H) x 25(D) mm (with clip)	Ø55 x 250 mm	62(W) x 100(H) x 25(D) mm (with clip)
Weight	approx. 245g (with battery)	85g (with battery)	245g (with battery)	approx. 85g (with battery)
Product Composition	Handheld wireless microphone x1, Tuner x 1	Lavalier wireless microphone x 1, Tuner x 1	Handheld wireless microphone x1, Tuner x 1	Lavalier wireless microphone x 1, Tuner x 1
Modulation	Wideband FM			
Frequency Range	506-937.5 MHz*2, UHF			
Tunable Frequencies	25 kHz Steps			
Channel Selectable	S4.04 : 4 channels	S4.10 : up to 16 channels (depending on region)		
Pilot Tone	32.768kHz			
Total Harmonic Distortion	less than 1% @1kHz			
Function	IR sync, Channel scan, Battery life information			
Dynamic Range	more than 96 dB(A)			
Operating Range	approx. 100 m			
Operating Temperature	-10°C to +50° C			
Accessory	AC Adapter*3 x1, Microphone holder W5/16" x1	AC Adapter*3 x1, Screwdriver x1	AC Adapter*3 x1, Microphone holder W5/16" x1	AC Adapter*3 x1, Screwdriver x1
Diversity Reception	Antenna Diversity			
Sensitivity	10uV at 45 dBA S/N			
Squelch (SQ)	Tone SQ, Carrier SQ, Noise SQ			
Audio Frequency Response	50 - 15kHz			
Audio Output Level (Max)	Balanced (XLR socket): -20dBu Unbalanced (1/4" jack socket): +10dBu		Balanced (XLR socket): 16dBu Unbalanced (1/4" jack socket): 10dBu	
Power Supply	11-18 VDC 500mA			
Dimensions	214 (W) x 39 (H) x 102 (D) mm (excluding antenna and BNC)			
Weight	480g			

\*2

Band	Frequency
B	720 - 758 MHz, UHF
C	785 - 832 MHz, UHF
D	836 - 866 MHz, UHF
E	671 - 701 MHz, UHF
F	633 - 671 MHz, UHF
G	603 - 633 MHz, UHF
H	576 - 603 MHz, UHF
K	902 - 938 MHz, UHF

\*3

Version	AC Adapter
G (UK)	220 - 230 V AC, 50Hz
E (ER)	230 V AC, 50Hz
T (US)	120 V AC, 50Hz
A (AS)	230 V AC, 50Hz
R (US)	120 V AC, 60Hz
C (CH)	220 V AC, 50Hz

» S4.10 UHF Dual Channel Wireless Microphone System

S4.10-HD2-EA  
S4.10-HDL-EA  
S4.10-L2-EA



\* 0dB = 0.775V

Model	S4.10-HD2-EA	S4.10-HDL-EA	S4.10-L2-EA
Microphone Unit	Dynamic with cardioid pattern	Dynamic with cardioid pattern	TRANTEC series lavalier microphone
RF Carrier Power	10mW	10mW	10mW
Audio Frequency Response	80 - 15 kHz	80 - 15 kHz	50 - 15 kHz
Audio Input Level	140 dB SPL (Max)	140 dB SPL (Max)	-6 dBV (Max), mic gain 0dB
Modulation System	PLL synthesizer	PLL synthesizer	PLL synthesizer
Indicator	Battery status LED, 7 segments LED	Battery status LED, 7 segments LED	Battery status LED, 7 segments LED
Battery Life	Approx. 10 hours	Approx. 10 hours	Approx. 10 hours
Power Supply	1 AA size alkaline battery, 1.5V	1 AA size alkaline battery, 1.5V	1 AA size alkaline battery, 1.5V
Finish	Resin, coating	Resin, coating	Resin, coating
Dimensions	Ø55 x 250 mm	55 x 250 mm	62(W) x 100(H) x 25(D) mm (with clip)
Weight	245g (with battery)	245g (with battery)	85g (with battery)
Product Composition	Handheld wireless microphone x2, Tuner x1	Handheld wireless microphone x1, Lavalier wireless microphone x1, Tuner x1	Lavalier wireless microphone x2, Tuner x1
Frequency Range	506-937.5 MHz*2, UHF		
Tunable Frequencies	25 kHz Steps		
Channel Selectable	S4.10 : Up to 16 channels (depending on region)		
Pilot Tone	32.768kHz		
Total Harmonic Distortion	less than 1% @1kHz		
Function	IR sync, Channel scan, Battery life information		
Accessory	AC Adapter*3 x1, Microphone holder W5/16" x1		AC Adapter*3 x1, Screwdriver x1
Diversity Reception	AC mains (supplied AC-DC adapter must be used)		
Sensitivity	10uV at 45 dBA S/N		
Squelch (SQ)	Tone SQ, Carrier SQ, Noise SQ		
Audio Frequency Response	50 - 15kHz		
Audio Output Level (Max)	Balanced (XLR socket): 16dBu Unbalanced (1/4" jack socket): 10dBu		
Power Supply	11-18 VDC 500mA		
Dimensions	214 (W) x 44 (H) x 202 (D) mm (excluding antenna and BNC)		
Weight	670g		

\*2

Band	Frequency
B	720 - 758 MHz, UHF
C	785 - 832 MHz, UHF
D	836 - 866 MHz, UHF
E	671 - 701 MHz, UHF
F	633 - 671 MHz, UHF
G	603 -633 MHz, UHF
H	576 - 603 MHz, UHF
K	902 - 938 MHz, UHF

\*3

Version	AC Adapter
G (UK)	220 - 230 V AC, 50Hz
E (ER)	230 V AC, 50Hz
T (US)	120 V AC, 50Hz
A (AS)	230 V AC, 50Hz
R (US)	120 V AC, 60Hz
C (CH)	220 V AC, 50Hz

» Ear-Hook Microphone

YP-MS4E



Type: Electret Condenser type  
Directivity: Omnidirectional  
Frequency Response: 20 Hz - 20 kHz  
Sensitivity: -67 dB ±3 dB [0 dB = 1V/0, 1Pa, 1 kHz]  
Max. Input Level: 115 dB SPL, 1 kHz at 1%  
Cord Length: 1.3m [4.27 ft]  
Terminal: ø3.5mm [0.14"] Stereo plug  
Finish: Beige color  
Weight: 16g or 0.56 oz [cable included]

» Headset Microphone

YP-MS4H



Type: Electret Condenser type  
Directivity: Omnidirectional  
Frequency Response: 20 Hz - 20 kHz  
Sensitivity: -67 dB ±3 dB [0 dB = 1V/0, 1Pa, 1 kHz]  
Max. Input Level: 115 dB SPL, 1 kHz at 1%  
Cord Length: 1.3m [4.27 ft]  
Terminal: ø3.5mm [0.14"] Stereo plug  
Finish: Beige color  
Weight: 23g or 0.81 oz [cable included]

## S5.5 Series

» S5.5 UHF Hand-Held Wireless Set / S5.5 UHF Hands-Free Wireless Set

### S5.5-HC-C5 / S5.5-HD-C5 / S5.5-L-C9



\* 0dB = 1V

Model	S5.5-HC-C5	S5.5-HD-C5	S5.5-L-C9
Product Composition	Handheld wireless microphone S5.5-HCX x 1, Diversity Tuner S5.5-RX x 1	Handheld wireless microphone S5.5-HDX x 1, Diversity Tuner S5.5-RX x 1	Lavalier wireless microphone S5.5-LTX x 1, Diversity Tuner S5.5-RX x 1
Channel Selectable	10 banks, 24 frequencies max/bank (the number of channels may differ from country to country)		
Tone Frequency	32.768kHz		
Operation Temperature	-10°C to +50°C		
Accessory	CD (PC Monitoring Software) x 1, BNC cable x 2, AC adapter x 1, Microphone holder W3/8" (with stand adapter) x 1, Wireless antenna x 2, Antenna blanking cap x 2, color ring (6 colors) x 6, Rack mount kit x 1		CD (PC Monitoring Software) x 1, BNC cable x 2, AC adapter x 1, Lavalier Microphone x 1, Belt crip x 1, Wireless antenna x 2, Antenna blanking cap x 2, Rack mount kit x 1
	Wireless Microphone		
Microphone Element	Electret condenser microphone unit: cardioid	Dynamic microphone unit: Hyper cardioid	Electret condenser microphone, Omni-directional pattern
Modulation	Frequency modulation		
RF Carrier Power	50 mW or less		
Modulation System	PLL synthesized		
Max. Input Level	142dB SPL (microphone sensitivity: Gain "0")	146dB SPL (microphone sensitivity: Gain "0")	120dB SPL (microphone sensitivity: Gain "0")
Audio Input Connector	-	-	TA-4 (Mini-XLR 4pins)
Max. Deviation	±40kHz		
Audio Frequency Response	90Hz - 20kHz	60Hz - 20kHz	
Dynamic Range	110 dB or more (with S5.5-RX)		
Battery	LR6 (AA)		
Battery Life	10 hours (alkaline)		
Indicator	LCD display, power lamp		
Antenna	Built-in type		1/4λ mono-pole type
Function	Mute switch, Infra-red link port, battery life indicator (4 steps), Microphone sensitivity adjustment (Gain 0-2; 12dB)		Infra-red link port, battery life indicator (4 steps), Microphone sensitivity adjustment (Gain 0-9; 20dB)
Finish	Dark gray		Silver
Dimensions	Ø50 x 232.9 mm	Ø50 x 247.9 mm	55 (W) x 80 (H) x 22 (D) mm
Weight	300g (with battery)	380g (with battery)	140g (with battery)
	Wireless Tuner		
Power Source	230V AC, 50Hz (supplied AC adapter must be used)		
Power Consumption	300 mA (13V DC)		
Receiving System	Double super-heterodyne		
Diversity System	Space diversity (true diversity)		
Audio Output	Line: -22 dB*/MIC: -62 dB* Line/MIC selectable, 600Ω, balanced, XLR-3-32 type connector Headphone: max. 100mW 16Ω, unbalanced, phone jack, -28 dB*, 600Ω, unbalanced, phone jack		
Antenna Input	50Ω, BNC		
Antenna Phantom Power	9V DC, 30mA (max.) (Available to turn off phantom power)		
Receiving Sensitivity	0 dBμV or less (12dB SINAD)		
Squelch Sensitivity	6-36 dBμV variable		
Squelch System	Using together of noise SQ, carrier SQ and tone SQ		
Tone Frequency	32.768kHz		
Indicator	LCD, Power lamp, Mute lamp, ANT A/B lamp		
S/N Ratio	110dB or more (A-weight)		
Harmonic Distortion	1% or less (typical)		
Frequency Response	50Hz - 20kHz, ±3 dB		
Function	Audio low-cut, high-boost and phase reverse, battery indicator (7 steps), Headphone output, Infra-Red link port, Channel scan, Monitoring software with USB connectivity		
Finish	Chassis: Steel, dark gray, painting Front panel: Anodized aluminum, silver		
Dimensions	210 (W) x 46 (H) x 210 (D) mm (excluding antenna)		
Weight	1.3kg		



### »» Lapel Microphone

for S5 Series **MIC-X2**  
for S4 Series **MIC-LP2**

**Type:** Omni-directional electret condenser  
**Normal Impedance:** 3000Ω  
**Max SPL:** >120dB  
**Operating Voltage:** 2-10 volts min/max  
**Current Consumption:** 50 μA  
**Frequency response:** 60Hz-16kHz ±3dB  
**Cable length:** 1500mm  
**Colours Available:** Black



### »» Microphone Clip

for S5 Series **ACC-X2-CLIP**  
for S4 Series **ACC-LP2-CLIP**

for microphone stand



### »» Rack Mounting Bracket

**ACC-S5RX-MB1**

1U, 19" Rack Mount Kit for S5 Receiver enable you to mount 1 x S5 receiver in a 1U, 19" rack space.



### »» Rack Mounting Bracket

**ACC-S5RX-MB2**

1U, 19" Rack Mount Kit for S5 Receiver enable to mount 2 x S5 receivers side by side



### »» Rack Mounting Bracket

**ACC-S5RX-MB3**

1U, 19" Rack Mount Kit for S5 Receiver enable you to mount 1 x S5 receiver in a 1U, 19" rack space. Complete with antenna extension cables.



### »» Wireless Antenna

**ANT-S5X-D**

Frequency range: 830-865MHz



### »» Wireless Antenna

**ANT-S5X-G**

Frequency range: 606-638MHz



### »» AC Adapter

**PS-S115-UK**

Output 13V DC 300mA



### »» Remote Antenna

**YW-7570**

Directional antenna designed for having higher receiving sensitivity in the directional angle



**Frequency Range:** 570 - 870 MHz  
**Type of Antenna:** Log-periodic antenna  
**Antenna Gain:** 6 dBi  
**V.S.W.R:** 2.0 or less  
**Output Impedance:** 50 Ω  
**Output Connector:** BNC jack  
**Mounting Screw:** NS5/8 (with adaptor to W3/8)  
**Finish:** FR-4 glass epoxy board, t2.0  
**Dimensions:** 433 (W) × 288 (H) × 31.7 (D) mm  
**Weight:** 315 g

### »» Antenna Distribution Unit

**S5-ADU-GW**

allow a single pair of antennae to feed up to 4 receivers  
For larger systems(up to 12 channels), additional ADUs can be cascaded.



### »» Cable

**LD-X-JAC**

for S5 Series only

Instrument cable terminated with 4 pin miniXLR (TA-4) - 6.3mm Mono Jack Plug, 1.3 length.



### »» Antenna Cable

**LD-S5-ANT**

Using TNC Panel Mount Socket - TNC Plug with 35cm RG58 50 ohm coaxial cable



### »» Battery Compartment

**ACC-S5-BATC**

Replacement Battery compartment for Trantec S5BTX



### »» Battery Door

**ACC-S5-BATD**

Replacement Battery Door for Trantec S5BTX



### »» Belt Clip

**ACC-S5-CLIP**

Spare/replacement belt clip for Trantec S5BTX



### »» Leather Belt Pouch

**ACC-S5-POUCH**



# Microphones (Wired)

## Array Microphones

### »» Real-Time Steering Array Microphone

### AM-1MBQAM/AM-1MWQAM



(\*1) 0dB = 0.775V  
(\*2) 0dB = 1V

Model	AM-1MBQAM	AM-1MWQAM
Product Composition	Array Microphone AM-1MB x 1, Control Unit AM-1C x 1	Array Microphone AM-1MW x 1, Control Unit AM-1C x 1
	Array Microphone	
Power Source	24 V DC (supplied from the Control unit)	
Microphone	Unidirectional electret condenser microphone	
Directivity Angle	Horizontal: 50° ( 800Hz - 18 kHz, Array mode), 180° ( Cardioid mode), Vertical: 90°	
Frequency Response	150 Hz - 18 kHz	
Maximum input Sound Pressure	100 dB SPL	
Operation	Mute Switch	
Indicator	Microphone status indicator (output: green, mute: red)	
Microphone Cable	Shielded twisted pair cable 10m (32.81 ft) with connector equivalent to TA-3	
Maximum Cable Distance	70m (229.66 ft) (use of the AES/EBU cable)	
Finish	Body, Punched net: Suface-treated steel plate, black, 30% gloss Side cover: ABS resin, black	Body, Punched net: Suface-treated steel plate, white (RAL 9016 equivalent), 30% gloss Side cover: ABS resin, white (RAL 9016 equivalent)
Dimensions	483.9 (W) x 22.1 (H) x64.9 (D) mm (excluding Cable)	
Weight	1.2 kg	
	Control Unit	
Power Source	24 V DC (supplied from the AC adapter (option)) Usable DC power supply plug: 5.5 mm (0.22") outer diameter, 2.1 mm (0.08") inner diameter, 9.5 mm (0.37") long, and non-polarity type	
Current Consumption	410 mA or less	
Signal to Noise Ratio	90 dB or more	
Input	Combined type of TA-3 (dedicated to the array microphone)	
Output	Combined type of XLR-3-32, Removable terminal block (3 pins)	
Network	Network I/F: 10 BASE-T/100BASE-TX, RJ45 connector Network protocol: TCP/IP, HTTP	
Level Control	Output level selection ( +4dB (*1), -10 dB(*2), -50dB (*1)) LOW CUT ON/OFF	
Operation	Power switch	
Indicators	Power indicator (blue), Mute indicator (red), Signal indicator (green)	
Finish	Pre-coated steel plate, black, 30% gloss	
Dimensions	210 (W) x 45.7 (H) x 271.5 (D) mm	
Weight	1.5 kg	
Dedicated Software	iPad app, PC browser software ( for setting of tracking distance/range, sensitivity/speed, mute ON/OFF)	
Operating Temperature	0°C to +40°C	
Operating Humidity	90% RH (no condensation)	
Accessory	Removable terminal plug (3 pins) x1	
Option	AC adapter: AD-246, Rack mounting bracket: MB-15B-BK (for rack mounting one control unit), MB-15B-J (for rack mounting two control units), Wall mounting bracket: YC-850 (for one control unit)	

# Desktop Microphones

## »» Paging Microphone

### PM-660 / PM-660D / PM-660U



Model	PM-660	PM-660D	PM-660U
Type	Moving coil microphone		
Directivity	Unidirectional		
Rated Impedance	600Ω, unbalanced	600Ω, balanced	
Rated Sensitivity	-58dB (1kHz, 0dB = 1/Pa)		
Frequency Response	100Hz - 10kHz		
Output	ø4.5, 2-conductor shielded cable (2.5m) with stereo phone plug	ø5.0, 4-conductor (2-shielded) cable (2.5m) with 5-pin DIN plug	ø5.0, 4-conductor (2-shielded) cable (2.5m) without plug
Talk Switch	Push-to-talk type (short-off circuit, with lock lever)		
Remote Control	500mA or less at 30V DC		
Finish	Head: Zinc plated steel wire, gray baked paint Body: ABS resin, gray		
Dimensions	100 (W) x 215 (H) x 150 (D) mm		
Weight	440g (cord excluded)		

## »» Amplifier Control Unit for PM-660D

### RU-2001 / RU-2002



Model	RU-2001	RU-2002
Power Requirement	12-24V DC or 12V AC adapter	
Current Consumption	60mA	
Microphone Input	-62dBV, 600Ω, unbalanced, 5-pin DIN socket	
Output	0dBV, 600Ω, balanced, M3 screw terminal, distance between barriers: 6.4mm	
Chime	-	4-tone chime, 2-tone chime, single-tone chime
Finish	Pre-coated steel plate, black	
Dimensions	124 (W) x 42.5 (H) x 159 (D) mm	
Weight	700g	
Accessory	Mounting bracket x 1	

## »» Chime Microphone

### EC-380-AS



Model	EC-380-AS
Power Source	6V DC (4 x "AA" batteries) or DC adapter: 9 - 24V
Current Consumption	13mA during chime and 6 mA microphone operation
Microphone Element	Condenser
Polar Pattern	Cardioid
Chime Tones	4-tone chime (up/ down)
Rated Impedance	600 Ω, balanced
Output	Microphone: -41 dB ±3 dB (1 kHz 0dB = 1V/Pa) Chime Tones: -31 dB ±3 dB (max. position)
Microphone Frequency Response	50 Hz - 18 kHz

Output Connector	XLR-3-32 Equivalent RJ45: Audio Output, Power supply and contact output
Operating Temperature	0 °C - 40 °C
Finish	Stand Mic: ABS resin, Black, Paint MIC shaft: Copper alloy, Black, Paint
Dimensions	110 (W) x 145 (L) x 532 (H) mm
Weight	558g (excludes batteries)
Accessory	Windscreen x 1, XLR Cable Stereo Phone Plug (7.5m) x 1
Option Accessory	AD-246 AC adapter

Note: Batteries and AC adapter are not supplied with the unit. Please purchase separately.

# Handheld Microphones

## Uni-Directional Dynamic Microphone

DM-1100  
DM-1200  
DM-1300  
DM-1500



Model	DM-1100	DM-1200	DM-1300	DM-1500
Type	Moving coil microphone			
Directivity	Unidirectional			
Rated Impedance	600Ω, unbalanced	600Ω, balanced		
Rated Sensitivity	-55dB (1kHz 0dB = 1 V/Pa)	-52dB (1kHz 0dB = 1 V/Pa)	-54dB (1kHz 0dB = 1 V/Pa)	-56dB (1kHz 0dB = 1 V/Pa)
Frequency Response	100Hz - 12kHz	50Hz - 12kHz	70Hz - 15kHz	
Connection Cable	Single-core shielded cable	Single-core shielded cable, unbalanced	Single-core shielded cable, unbalanced	2-core shielded cable, unbalanced
Cable Length	7.5m	10m	10m	
Terminal of Cable	Phone plug		Phone plug	
Talk Switch	Short-off, slide switch		Short-off, slide switch	
Finish	Body: Die-cast aluminum, black Head: ABS resin/zinc-plated steel wire, black	Body: Die-cast zinc, metallic gray Head: Die-cast aluminum/zinc-plated steel wire, metallic gray	Body: Die-cast zinc, metallic gray Head: Steel/zinc-plated steel wire, metallic gray	Body: Die-cast zinc, metallic gold Head: Brass/zinc-plated steel wire, metallic gold
Dimensions	ø55 x 178mm	ø39.5 x 163mm	ø51 x 170mm	ø40.5 x 173mm
Weight	155g (without connection cable)	265g (without connection cable)	245g (without connection cable)	280g (without connection cable)
Accessory	Microphone holder (U5/16, NS5/8) x 1	Microphone holder (U5/16, NS5/8, W3/8) x 1	Microphone holder (U5/16) x 1	

## Paging Microphone

PM-120  
PM-222



Model	PM-120	PM-222
Type	Moving coil microphone	
Directivity	Unidirectional	
Frequency Response	50Hz - 12kHz (close-talking characteristic)	100Hz - 10kHz
Rated Sensitivity	-56dB (1kHz, 0dB = 1V/Pa)	-47dB (1kHz, 0dB = 1V/Pa)
Rated Impedance	250Ω, unbalanced	600Ω, unbalanced
Cable	Coiled cable ø6 x 2.5m (at a max. extended length)	1-core shielded cable, 2m (when extended)
Terminal	-	Phone plug
Talk Switch	Push-to-talk switch	Short-off type with lock
Finish	Front: ABS resin, matte, champagne gold Rear: ABS resin, matte, black	ABS resin, gray
Remote Control Capacity	-	-
Dimensions	-	44 (W) x 160 (H) x 38 (D) mm
Weight	230g	200g
Accessory	-	Microphone holder x 1, metal fitting x 1, tapping screw (4x16) x 2
Option	Microphone hanger: 2202	-

Note: PM-120 can be modified to the balanced type by changing a plug

## Other Microphones

### »» Lavalier Microphone

**EM-410**



### »» Flush-Mount Boundary Microphone

**EM-600**



### »» Boundary Microphone

**EM-700**



Model	EM-410	EM-600	EM-700
Type	Electret condenser microphone		
Directivity	Hypercardioid	Omnidirectional	Cardioid
Rated Impedance	120Ω, balanced		
Rated Sensitivity	-47dB (1kHz, 0dB = 1V/Pa)	-36 dB (1kHz, 0 dB = 1V/Pa)	-33 dB (1kHz, 0 dB = 1 V/Pa)
Phantom Power	9 – 52V DC		
Frequency Response	100Hz – 15kHz	30Hz – 20kHz	35Hz – 20kHz
Low Cut	-	-	100Hz – 12dB/ oct
Connector	Balanced-phone plug	XLR-3-12 equivalent	
Connection Cable	-	-	-
Cable Length	5m	-	7.5m
Operating Temperature	0°C to +40°C		
Finish	Body: Copper alloy, black, semi-gloss, paint	Body: Steel, white, semi-gloss, paint Head: Zinc-plated steel wire, white, semi-gloss, paint	Body: Die-cast aluminum, black, matte finish, paint Punched net: Surface-treated steel plate, black, matte finish, paint
Dimensions	ø8.9 × 28.6mm	ø28 × 68mm	83 (W) × 23 (H) × 83 (D) mm
Weight	100g	85g	290g
Battery	-	-	-
Accessory	Windscreen × 1, Clip Holder × 1	Rubber Isolation Ring × 2, M20 Nut × 1	-

### »» Gooseneck Microphone

**EM-380-AS**



### »» Gooseneck Microphone

**EM-800**



### »» Fixed Lo-Z Gooseneck Microphone

**DM-524B**



### »» Fixed Lo-Z Gooseneck Microphone with Switch

**DM-524S**



Model	EM-380-AS	EM-800	DM-524B	DM-524S
Type	Electret condenser microphone		Moving coil microphone	
Directivity			Cardioid	
Rated Impedance	750Ω, balanced	120Ω, balanced	600Ω, balanced	
Rated Sensitivity	-41dB ±3 dB (1kHz 0dB = 1V/Pa)	-35dB (1kHz 0dB = 1V/Pa)	-56dB (1kHz 0dB = 1V/Pa)	
Phantom Power	9 – 52V DC or 3V DC (2xAA Batteries)	9 – 52V DC	-	-
Frequency Response	50Hz – 16kHz	60Hz – 20kHz	-	-
Frequency Range	-	-	100Hz - 10kHz	
Switch	-	-	-	Slide/short-off type
Connector	XLR-3-12 equivalent	XLR-3-12 equivalent	ø21, 3-pin plug (BTS21P3B)	
Operating Temperature	0°C to +40°C	0°C to +40°C	-	-
Finish	Stand Mic: ABS resin, Black, Paint Mic Shaft: Copper alloy, Black, Paint	Body, Shaft: Copper alloy, black, semi-gloss, paint	Microphone body: Gold, sparkling paint Gooseneck shaft: Nickel-pear, skin-plating	
Dimensions	110 (W) x 145 (L) x 532 (H) mm	ø12 × 420mm	-	-
Weight	550g (exclude batteries)	135g	465g	475g
Accessory	Windscreen x 1, XLR to Phone Jack Cable (7.5m) x 1	Windscreen x 1	ø21 3-pin receptacle (BTS21R3A) x 1, Screw (M3x10) x 3, W3 washer x 3, SW3 spring washer x 3, M3 nut x 3	
Applicable Stand	-	ST-800 (option)	ST-73A (option) or ø21mm 3-pin socket	



## Optional Accessories

### Desk Stands

#### » Microphone Desk Stand

**ST-800**

**ST-73A**

**ST-65A**

**ST-66A**



Model	ST-800	ST-73A	ST-65A	ST-66A
Mounting Screw	-	-	U5/16 thread (thread adapter), NS5/8 thread (inner pipe)	
Application Microphone	-	-	ø18 - ø35mm in diameter, Mountable weight: Max. 500g	
Input Connector	XLR-3-31 or equivalent	BTS21R3A	-	-
Output Connector	XLR-3-32 or equivalent	XLR-3-14 or equivalent	-	-
Usable Connector	-	Input: BTS21R3B Output: XLR-3-11C or equivalent	-	-
Finish	Die-cast zinc, black, matte finish, paint	Zinc die-casting, black, paint	Shaft: Steel pipe for general use; Inner pipe: Chrome plating Outer pipe: Black, semi-gloss, paint Base: Iron casting, black, semi-gloss, paint	
Dimensions	115 (W) x 40 (H) x 124 (D) mm	ø165 x 58.5 (H) mm	-	-
Weight	715g	2.3kg	1kg (without accessory)	1.1kg (without accessory)
Accessory	-	-	Clip type microphone holder (U5/16 thread) x 1	

### Goosenecks

#### » Flexible Gooseneck

**ST-506 / ST-507**



Model	ST-506	ST-507
Finish	Chromium plating	
Length	150mm	300mm
Weight	130g	210g

### Microphone Stands

#### » Microphone Stand

**ST-303A**

**ST-304A**

**ST-310F**

**ST-321B**



Model	ST-303A	ST-304A	ST-310F	ST-321B
Effective Extensible Length	940 - 1,600mm	890 - 1,530mm	-	1,045 - 1,706mm (Boom Enlarged Extensible Length: 53 - 660mm)
Diameter	-	-	Upper shaft: ø15.9mm Lower shaft: ø22.2mm Base: ø360	-
Mounting Screw	NS5/8 (pipe thread), U5/16 (adapter)		W3/8 (stand thread), U5/16 (adapter)	NS5/8 (pipe thread), U5/16 (adapter)
Adjustable Stand Height	-	-	908 - 1,515mm	-
Finish	Steel pipe for general use, chrome plating	Outer pipe: Steel for general use, black semi-gloss paint Inner pipe: Steel for general use, chrome plating Base: Iron casting, black, semi-gloss paint	Shaft: Chrome plating Base: Semi-matte paint, black	Steel pipe for general use, black, matte finish, paint
Weight	1.7kg	3.6kg	3.8kg	2.9kg
Accessory	Thread adapter x 1	Thread adapter x 1, Cord clip x 1	-	Thread adapter x 1

# Megaphones

## Hand Grip Megaphones

### »» Hand Grip Megaphone

#### ER-1215



### »» Hand Grip Megaphone with Siren

#### ER-1215S



### »» Hand Grip Megaphone with Shoulder Strap and Detachable Microphone

#### ER-3215



Model	ER-1215	ER-1215S	ER-3215
Power Source	R14P (C) × 6 (9V DC)		
Rated Output	15W		
Max. Output	23W		
Battery Life	Approx. 14 hours (JEITA)*	Voice: Approx. 14 hours (JEITA)* Siren: Approx. 20 min (JEITA)*	Approx. 9 hours (JEITA)*
Audible Range	Approx. 315m (JEITA)*	Voice: Approx. 315m (JEITA)* Siren: Approx. 500m (JEITA)*	Approx. 400m (JEITA)*
Signal Sound	-	Siren (sounds at 5 seconds intervals)	-
Diaphragm	Polyimide film (voice coil, bobbin)		
Operating Temperature	-10°C to +40°C		
Finish	Horn: ABS resin, light gray Mouth, battery case and handle: ABS resin, gray Strap: Nylon, black	Horn, mouth, battery case and handle: ABS resin, red Strap: Nylon, black	Horn: ABS resin, light gray Mouth, battery case and handle: ABS resin, gray Strap: Nylon, black
Dimensions	210 (W) × 291 (H) × 346 (D)mm		
Weight	1.1kg (without batteries)	1.2kg (without batteries)	1.15kg (body, without microphone and batteries) Microphone: 150g

\* JEITA: Japan electronics and information technology industries association. (EIAJ TT-4501A)  
Note: Batteries are optional

## Waterproof Hand Grip Megaphones

### »» Splash Proof Megaphone

#### ER-1203



### »» Splash Proof Megaphone

#### ER-1206



### »» Splash Proof Megaphone with Whistle

#### ER-1206W



### »» Splash Proof Megaphone with Siren

#### ER-1206S



Model	ER-1203	ER-1206	ER-1206W	ER-1206S
Power Source	R6P (AA) × 4 (6V DC)	R6P (AA) × 6 (9V DC) or R6P (AA) × 4 (6V DC)		
Rated Output	3W	6W (when using six R6P batteries)		
Max. Output	4W	10W (when using six R6P batteries)		
Battery Life	Approx. 8 hours (JEITA)* <sup>1</sup>	When using six R6P batteries Approx. 8 hours (JEITA)* <sup>1</sup> When using four R6P batteries* <sup>2</sup> Approx. 5 hours (JEITA)* <sup>1</sup>	When using six R6P batteries Voice: Approx. 8 hours (JEITA)* <sup>1</sup> Whistle: Approx. 20 minutes When using four R6P batteries* <sup>2</sup> (JEITA)* <sup>1</sup> Voice: Approx. 5 hours, Whistle: Approx. 10 minutes	When using six R6P batteries Voice: Approx. 8 hours (JEITA)* <sup>1</sup> Siren: Approx. 20 minutes When using four R6P batteries* <sup>2</sup> (JEITA)* <sup>1</sup> Voice: Approx. 5 hours, Siren: Approx. 10 minutes
Audible Range	Approx. 125m (JEITA)* <sup>1</sup>	Approx. 250m (JEITA)* <sup>1</sup>	Voice: Approx. 250m (JEITA)* <sup>1</sup> Whistle: Approx. 315m (JEITA)* <sup>1</sup>	Voice: Approx. 250m (JEITA)* <sup>1</sup> Siren: Approx. 315m (JEITA)* <sup>1</sup>
Signal Sound	-	-	Whistle	Siren (sounds at 5 seconds intervals)
Frequency Response	500Hz - 6kHz (SPL -20dB)	450Hz - 6kHz (SPL -20dB)		
Magnetic Circuit	Neodymium magnet, inner magnet type			
Diaphragm	Polyimide film (voice coil, bobbin)			
Water Protection	IPX5			
Operating Temperature	-10°C to +40°C			
Finish	Horn: ASA resin, clear dark gray Other: ASA resin, dark gray Strap: Nylon, black		Horn: ASA resin, clear dark gray Other: ASA resin, yellow Strap: Nylon, black	Horn: ASA resin, clear red Other: ASA resin, red Strap: Nylon, black
Dimensions	137 (W) × 257.8 (H) × 210 (D) mm	154 (W) × 266 (H) × 250 (D) mm		
Weight	610g (without Batteries)	660g (without Batteries)	680g (without Batteries)	
Accessory	-	Battery spacer × 1		
Option	Wall mounting bracket for megaphone : SP-1100			

Note: Batteries are optional

\*<sup>1</sup> JEITA: Japan electronics and information technology industries association. (EIAJ TT-4501A)

\*<sup>2</sup> With the additional use of the supplied battery spacer.

## »» Wall Mount Bracket

# SP-1100

**Finish:** Stay: Stainless steel; Holder and Dustproof cover: ASA resin, clear dark gray  
**Dimensions:** 126 (W) x 420 (H) x 156 (D) mm (With dustproof cover and holder are opened)  
**Weight:** 410g  
**Accessory:** Wall mounting screw (SUS self-tapping screw 4 x 16) x 2



## Shoulder Megaphones

### »» Shoulder Megaphone

## ER-2215



### »» Shoulder Megaphone with whistle

## ER-2215W



### »» Shoulder Megaphone with whistle

## ER-2230W



### »» Shoulder Megaphone with whistle

## ER-2930W



Model	ER-2215		ER-2215W	ER-2230W	ER-2930W
Power Source	R14P (C) × 6 (9V DC)			Battery: R20P (D) x 10 (15V DC), External Power: 12V DC Battery	
Rated Output	15W			30W	
Max. Output	23W			45W	
Battery Life	Approx. 9 hours (JEITA)*2 -	Voice: Approx. 9 hours (JEITA)*2 Whistle: Approx. 20 min (JEITA)*2	Voice: Approx. 17 hours (JEITA)*2 Whistle: Approx. 90 min (JEITA)*2		
Audible Range	Voice: Approx. 400m (JEITA)*2 -	Voice: Approx. 400m (JEITA)*2 Whistle: Approx. 500m (JEITA)*2	Voice: Approx. 800m (JEITA)*2, Whistle: Approx. 1,000m (JEITA)*2		
Signal Sound	-	Whistle (1.6kHz to 2.4kHz)			
AUX Input Sensitivity	-	-	-10dB** (300mV) 10kΩ (ø3.5 mini jack, stereo plug acceptable), volume control		
EXT Mic Input	-	-	600Ω, unbalanced, ø6.3 phone jack, volume control		
Receiving Frequency	-	-	-	UHF (800MHz band) VHF (200MHz band)	
Antenna	-	-	-	Fold-down flexible antenna	
Diaphragm	Polyimide Film (voice coil, bobbin)				
Remaining Battery Indication	-	-	LED (also serves as a power indicator) Steady ON: Normal use, Flashing: Batteries need replacement		
Operating Temperature	-10°C to +40°C				
Finish	Horn: ABS resin, light gray Microphone and others: ABS resin, gray Strap: Nylon, black			Horn ring: Vinyl chloride, gray Horn: Aluminum, light gray, paint Case top: Die-cast aluminum, gray, paint Strap: Nylon, black; Others: ABS resin, gray	
Dimensions	ø210 × 336 mm			ø351 × 512mm	
Weight	1.1kg (Body, without microphone and batteries) Microphone: 150g	1.2kg (Body, without microphone and batteries) Microphone: 150g	3.6kg (without batteries) Microphone: 150g	3.8kg (without batteries) Microphone: 150g	
Accessory	-	-	ø3.5 mini plug (AUX input) × 1, External power supply cord (1m) × 1, Splash-proof cover × 1*3		
Option	Speaker stand: ST-16A			Speaker stand: ST-16A Microphone: DM series	Speaker stand: ST-16A Microphone: DM series Wireless microphone: WM-3220 series, WM-3310 series, WM-4200 series, WM-4300 series Wireless tuner: WTU-3800 series, WTU-4800 series

Note: Batteries are optional

\*1 0dB = 1V

\*2 JEITA: Japan electronics and information technology industries association. (EIAJ TT-4501A)

\*3 Do not use the unit in heavy rains or strong winds, or in locations where the unit is directly exposed to water even using with the supplied splash-proof cover.

## »» Wireless Tuner Unit for ER-2930W

# WTU-4800



Model	WTU-4800
<b>Power Requirement</b>	7 ~ 12V DC
<b>Current Consumption</b>	100 mA
<b>Receiving Frequency</b>	576 ~ 865 MHz, UHF
<b>Receiving System</b>	Double super-heterodyne
<b>Receiving Sensitivity</b>	80dB or more, S/N ratio (20 dBμV input, 40kHz deviation)
<b>Antenna Input Impedance</b>	75Ω
<b>Diversity System</b>	Space diversity
<b>Channel Selectable</b>	16 channels
<b>Squelch System</b>	Noise SQ
<b>Squelch Sensitivity</b>	17 dBμV

<b>Output</b>	0dB* (max. deviation, 2.2kΩ load)
<b>Harmonic Distortion</b>	1% or less
<b>Frequency Response</b>	100Hz ~ 12kHz, ±3dB
<b>Operating Temperature</b>	-10°C to +50°C
<b>Operating Humidity</b>	30% to 85% RH (no condensation)
<b>Finish</b>	Surface-treated steel plate
<b>Dimensions</b>	60 (W) x 25 (H) x 139 (D) mm
<b>Weight</b>	130g
<b>Accessory</b>	Driver for channel changing x 1

\* 0dB = 1V

# Hands-Free Megaphones

»» Compact Power Megaphone

## ER-604W



Model	ER-604W
Power Source	R6 battery x 8 (12V DC) 12V DC / 0.8 A or more (AC adapter or DC power supply unit usable.)
Rated Output	6W
Max. Output	10W
Battery Life	Voice: Approx. 10 hours (R6P manganese dioxide battery use) Whistle: Approx. 30 minutes (continuous use)
Audible Range	Voice: 160m (under noise level of 55dB) Whistle: 160m (under noise level of 55dB)
Microphone	Close-talking type, press-to-talk switch, volume control, Fixed to the microphone hanger on the unit's top panel.
Signal	Whistle, push switch activation
Input	MIC 1: -40dB*, 1.5kΩ, ø6.3mm phone jack MIC 2: -18dB*, 3kΩ, ø3.5mm mini jack, phantom powering AUX: -12dB*, 18kΩ, ø3.5mm mini jack External power supply: 12V DC Note: MIC 1, 2, and AUX inputs can be used at the same time. However, their individual volume cannot be adjusted as the unit's volume control is common to those inputs.











Other Function	Voice switch (functions to activate the unit with external input signals, and to make the unit in stand-by status with no external signal.) Battery check
Operating Temperature	-10°C to +40°C
Finish	Body, microphone: ABS resin, off-white Shoulder pad, belt: Black
Dimensions	102 (W) × 258 (H) × 216 (D) mm (excluding shoulder belt)
Weight	1.6kg (without batteries)
Accessory	ø3.5 mini plug x 1, External power supply cord (1m) x 1
Options	Headset microphone: WH-4000A, WH-4000H Dynamic microphone: DM series Speaker stand: ST-16A











Note:

- Batteries are optional.
- Do not use the battery from a starting car as its voltage is high, otherwise, the megaphone may fail.
- Battery Life assumes that the megaphone is used for 30 minutes a day.
- Audible Range assumes that the megaphone employs new batteries and is used on a quiet street. It varies depending on such conditions as battery consumption, ambient noise, wind direction and obstacles.


























# Selection Charts





























## Speaker Mounting Accessories Selection Chart






Speakers	Wide-Dispersion Speakers			
	F-1000B / F-1000BT F-1300B / F-1300BT	F-1000W / F-1000WT F-1300W / F-1300WT	F-1000BTWP / F-1300BTWP	F-1000WTWP / F-1300WTWP
Installation Configurations				
Cluster Bracket	 HY-CL10B			
Ceiling Mounting Bracket	 HY-CM10B	 HY-CM10W		
Board Hanger Bracket	 HY-BH10B			
Pole Mounting Bracket			 YS-60B	
Speaker Stand	 ST-16A			



















Speakers	Wide-Dispersion Speakers			
	F-2000B / F-2000BT	F-2000W / F-2000WT	F-2000BTWP	F-2000WTWP
Installation Configurations				
Cluster Bracket	 HY-CL20B			
Ceiling Mounting Bracket	 HY-CM20B	 HY-CM20W		
Pole Mounting Bracket			 SP-131	 YS-60B
Speaker Stand	 ST-16A			



















Speakers	Compact Array Speakers					
	HX-5B	HX-5W	HX-5B-WP	HX-5W-WP	FB-120B	FB-120W
Installation Configurations						
Rigging Frame	 HY-PF1B	 HY-PF1W	 HY-PF1WP		 HY-PF1B	 HY-PF1W
Ceiling Mount Bracket	 HY-CW1B	 HY-CW1W	 HY-CW1WP			
Mount Bracket	 HY-WM1B  HY-WM2B	 HY-WM1W  HY-WM2W	 HY-WM1WP  HY-WM2WP			
Extension Bracket	 HY-CN1B	 HY-CN1W	 HY-CN1B-WP	 HY-CN1W-WP		
Speaker Stand Adapter	 HY-ST1					















Speakers	Compact Array Speakers					
	HX-7B	HX-7W	HX-7B-WP	HX-7W-WP	FB-150B	FB-150W
Installation Configurations						
Speaker Connection Bracket	 HY-CN7B	 HY-CN7W	 HY-CN7B-WP	 HY-CN7W-WP		
Angle Adjustment Bar	 HY-60DB	 HY-60DW	 HY-60DB-WP	 HY-60DW-WP		
Rigging Frame	 HY-PF7B	 HY-PF7W			 HY-PF7B	 HY-PF7W
Rigging Bracket	 HY-VM7B	 HY-VM7W	 HY-TM7B-WP	 HY-TM7W-WP		
Wall Mounting Bracket	 HY-WM7B	 HY-WM7W	 HY-MS7B-WP	 HY-MS7W-WP		
Matching Transformer Adapter	 HY-MT7					
Speaker Stand Adapter	 HY-ST7					








Speakers		Line Array Speakers Type A		
Installation Configurations	Indoor Use	SR-A12L / SR-A12S / SR-A18B	Outdoor Use	SR-A12LWP / SR-A12SWP
				
	Rigging Frame	 SR-RF12	 SR-RF12WP	
	Tilt Joint Plate	 SR-TP12		



<div>Speakers</div> <div>Installation Configurations</div>	Line Array Speakers Type S				Slim Array Speakers
	<div>SR-S4L</div> <div></div>	<div>SR-S4LWP</div> <div></div>	<div>SR-S4S</div> <div></div>	<div>SR-S4SWP</div> <div></div>	<div>TZ-S60W-EA</div> <div></div>
	<div>Extension Plate</div> <div><div></div><div>SR-EP4</div></div>	<div><div></div><div>SR-EP4WP</div></div>	<div><div></div><div>SR-EP4</div></div>	<div><div></div><div>SR-EP4WP</div></div>	
	<div>Wall Tilt Bracket</div> <div><div></div><div>SR-TB4</div></div>	<div><div></div><div>SR-TB4WP</div></div>	<div><div></div><div>SR-TB4</div></div>	<div><div></div><div>SR-TB4WP</div></div>	
	<div>Wall Mounting Bracket</div> <div><div></div><div>SR-WB4</div></div>	<div><div></div><div>SR-WB4WP</div></div>			
<div>Stacking Bracket</div>					<div><div></div><div>HY-S60W-EA</div></div>
<div>Stand Adapter</div>	<div><div></div><div>SR-SA4</div></div>				
<div>Protection Pad</div>	<div><div></div><div>SR-PP4</div></div>				






















Speakers	Line Array Speakers Type C			
	Indoor Use		Outdoor Use	
Installation Configurations	SR-C8L / SR-C8S / SR-C15B		SR-C8LWP / SR-C8SWP / SR-C15BWP	
				
	Rigging Frame		Rigging Frame	
	 SR-RF8		 SR-RF8WP	
	Cluster Bracket			
	 SR-CL8			
Rigging Support Bracket	 SR-SB8			
Tilt Joint Plate	 SR-TP8			

Speakers	Line Array Speakers Type H			
	SR-H2L	SR-H2S	SR-H3L	SR-H3S
Installation Configurations				
	Extension Plate			
	 SR-EP3		 SR-EP3	
	Wall Mount Bracket			
	 SR-WB3			
Wall Tilt Bracket	 SR-TB3			
Stand Adapter	 SR-SA3			










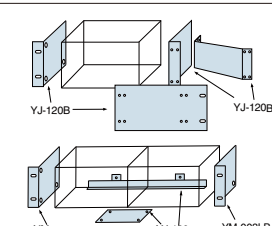




























Speakers	2-way Passive Speakers	
	SR-F04	SR-F08
Installation Configurations		
	Speaker Mount Bracket	Speaker Mount Bracket
	 HY-B0801	 HY-B0801
	 HY-UV04	 HY-UV08
	 HY-UH04	 HY-UH08
Ceiling Mount Bracket	 HY-C0801	
	 HY-C0801	
Wall Mount Bracket	 HY-W0801	
	 HY-WM04	
Speaker Stand	 ST-34B	
Speaker Stand Adapter	 HY-ST04	

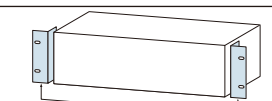Speakers	FGM Speakers			
	H-1	BS-1030B	BS-1030W	BS-1110W
Installation Configurations				
				
Ceiling Mount Bracket				
Wall Mount Bracket				
Speaker Stand				

Speakers	Line Array Speaker Type T
Installation Configurations	SR-T5 
Wall Pan Bracket	 SR-PB5

Speakers	HS Series Speakers			
	HS-120B HS-1200BT	HS-120W HS-1200WT	HS-150B HS-1500BT	HS-150W HS-1500WT
Installation Configurations				
Wall/Ceiling Mount Bracket				
Wall/Ceiling Mount Bracket				
Ceiling Mount Bracket				
Wall Mount Bracket				
Speaker Stand				


# Rack Mount Selection Chart

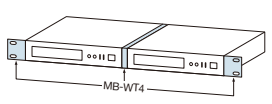Mountable Equipment				Rack Mounting Brackets			
	Name	Model	Appearance	Appearance, Size and Color	Setting		
Amplifiers	Mixer Amplifier	A-2030D-EA		<b>MB-25B (2-size)</b> Color: Black 			
		A-2060D-EA					
		A-2120D-EA					
		A-2240D-EA					
		A-2030					
		A-2060					
		A-2120					
		A-2240					
		A-3212DMZ-EA4					
		A-3224DMZ-EA4					
		A-3248DMZ-EA4					
		A-3512D					
		A-3524D					
		A-3548D					
		A-3606D					
		A-3612D					
		A-3624D					
		A-3648D					
	Power Amplifier	P-2240		<b>YM-003LB (1/2-size)</b> Color: Black <b>YB-121B (1/2-size)</b> Color: Black <b>YJ-120B (1/2-size)</b> Color: Black 			
		P-3248D-EA4					
		PA-3640VB					
IP Intercom Systems	Audio Interface Unit	N-8000AL		<b>MB-15B-BK (1-size)</b> (Color: Black) 			
	Telephone Interface Unit	N-8000AF					
	CO Interface Unit	N-8000CO					
Conference Systems	Conference Expansion Unit	TS-918		<b>MB-15B-J (1-size)</b> Color: Black 			
	Network-Related Systems	Network Audio Adapter				NX-100	
NX-100S							
NX-300							
Voice Evacuation Systems	VM-2000 Series	VM-2120		<b>MB-36 (3-size)</b> Color: Gray 			
		VM-2240					
Wireless Microphone Systems	Power Antenna Distributor	WD-5800		<b>MB-15B (1-size)</b> Color: Black 			
	UHF Wireless Tuner	WT-5800		<b>MB-WT3 (1-size)</b> Color: Black 			
		WT-5805					
		WT-4820					
	Infrared Wireless Tuner	IR-702T		<b>MB-WT4 (1-size)</b> Color: Black 			
	Infrared Wireless Distributor	IR-700D					
Rack Mount Equipment	Sound Repeater	EV-20R					


# Technical Column

## System Application 1

### SUPERMARKET SYSTEM (SINGLE ZONE)

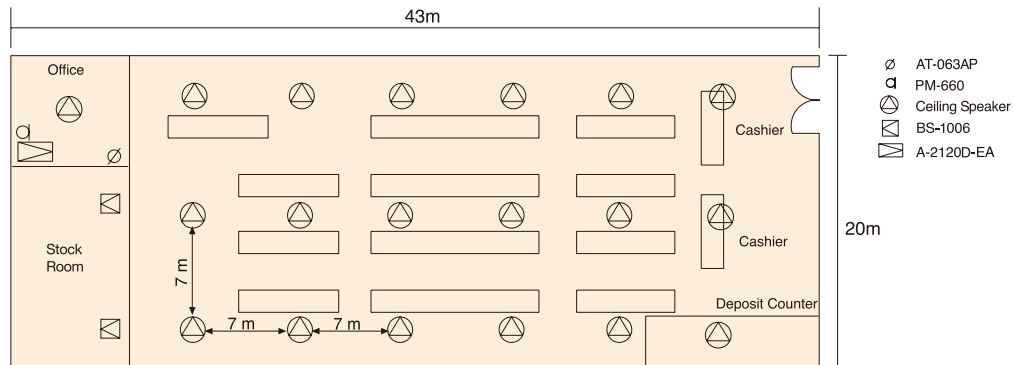


- Background music distribution (Speakers are spaced as short as 7m apart)
- Announcement / paging from the office
- Volume control for the office

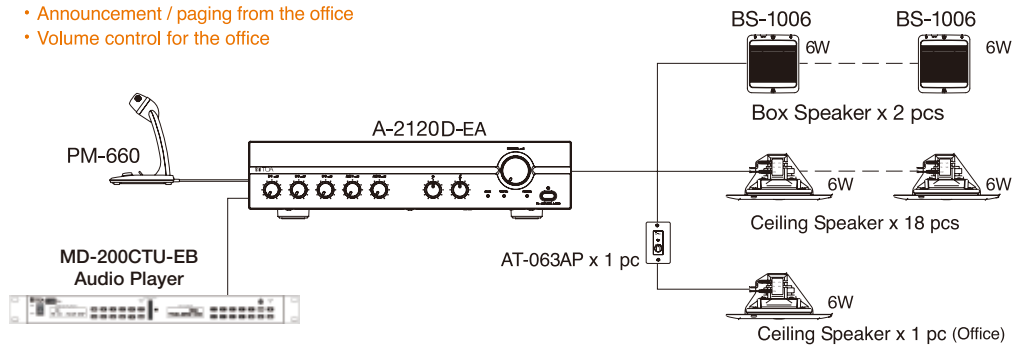


## System Application 2

### SUPERMARKET SYSTEM (5 ZONES)

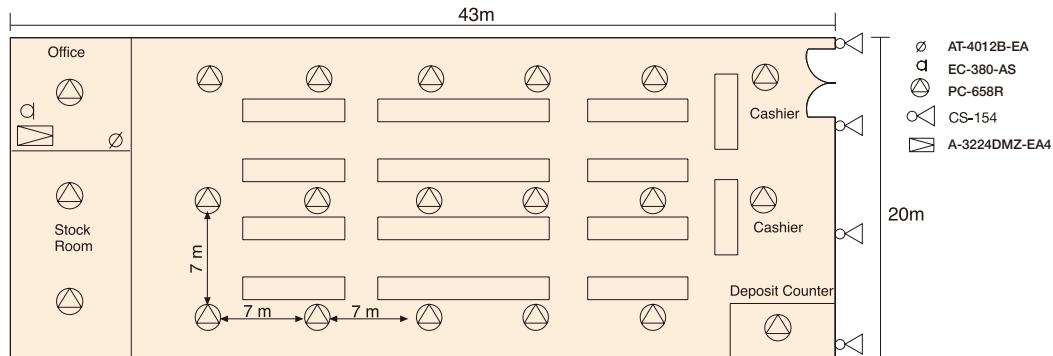


- Background music distribution (Speakers are spaced as short as 7m apart)
- Announcement / paging from the office
- Volume control for the office/stock room
- BGM is always available to shopping area and outside supermarket
- Announcements can be broadcasted to shopping area when speaker selector switch is selected

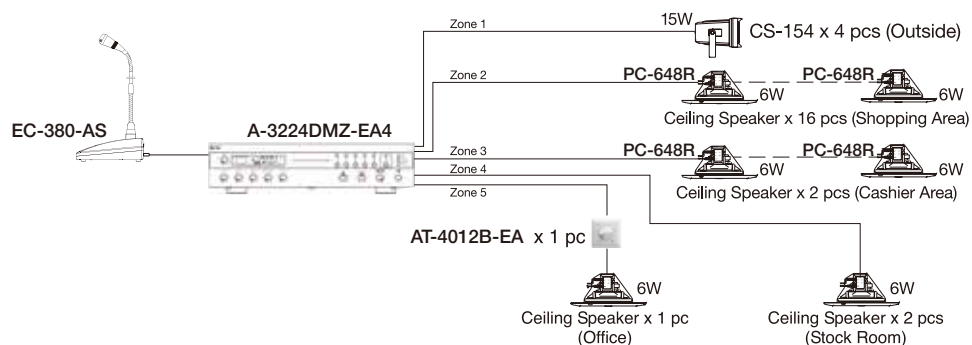




# System Application 3

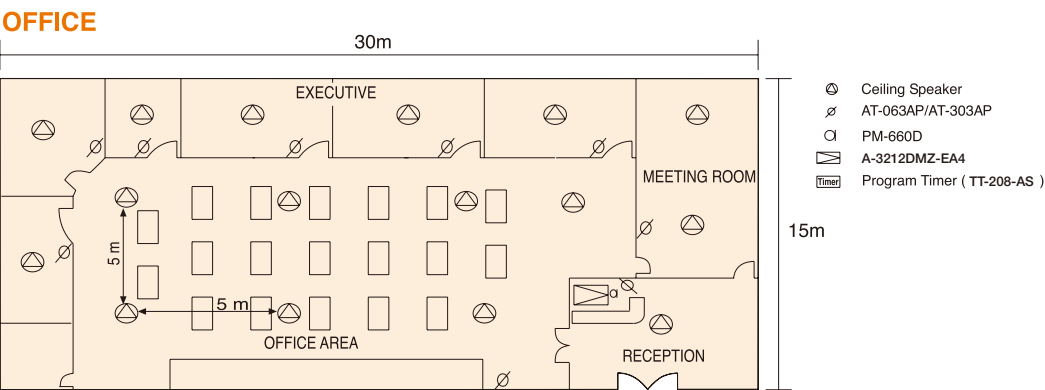


- Uniform background music distribution level in office area (Speakers are spaced as short as 5m apart)
- Background music of better sound quality (A-3000D series amplifier)
- Announcement with chime from reception desk
- Volume control in individual rooms
- Emergency broadcast is possible from main Building PA System
- Pre-recorded messages can be activated by timer for announcements (periodic broadcasting)

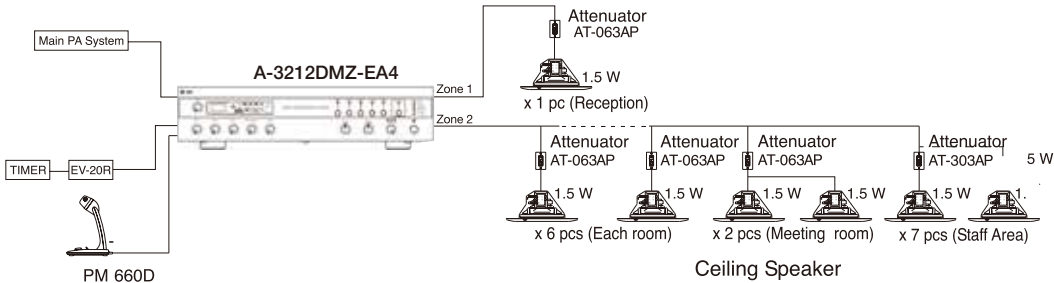


# System Application 4

## OFFICE BUILDING

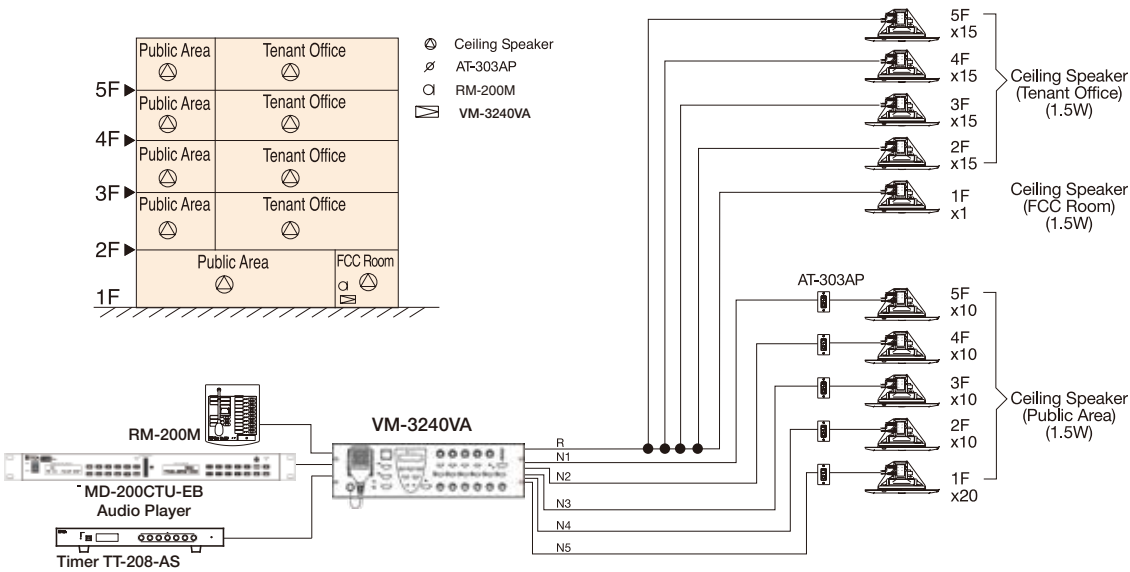


- Pre-recorded messages can be activated by timer for announcements (periodic broadcasting)
- BGM is always available to Public Area
- Announcement/paging can be made from the FCC room

## System Application 5

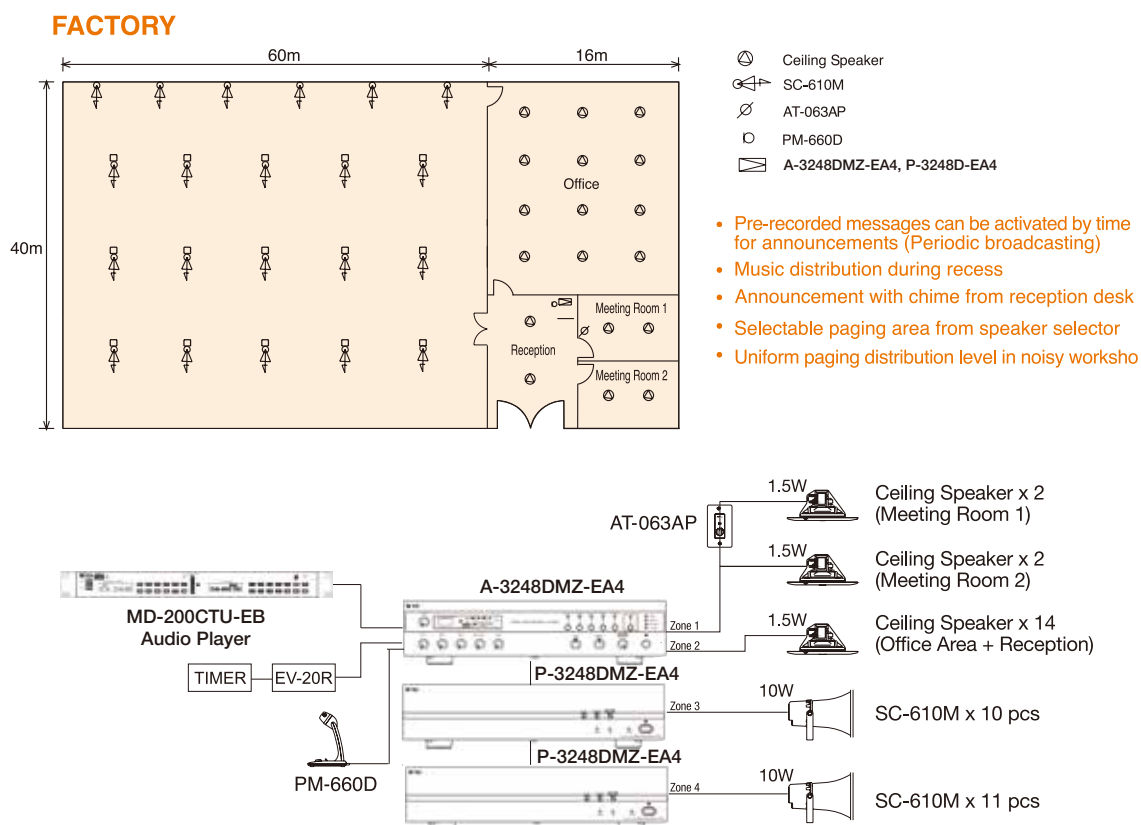


## System Application 6

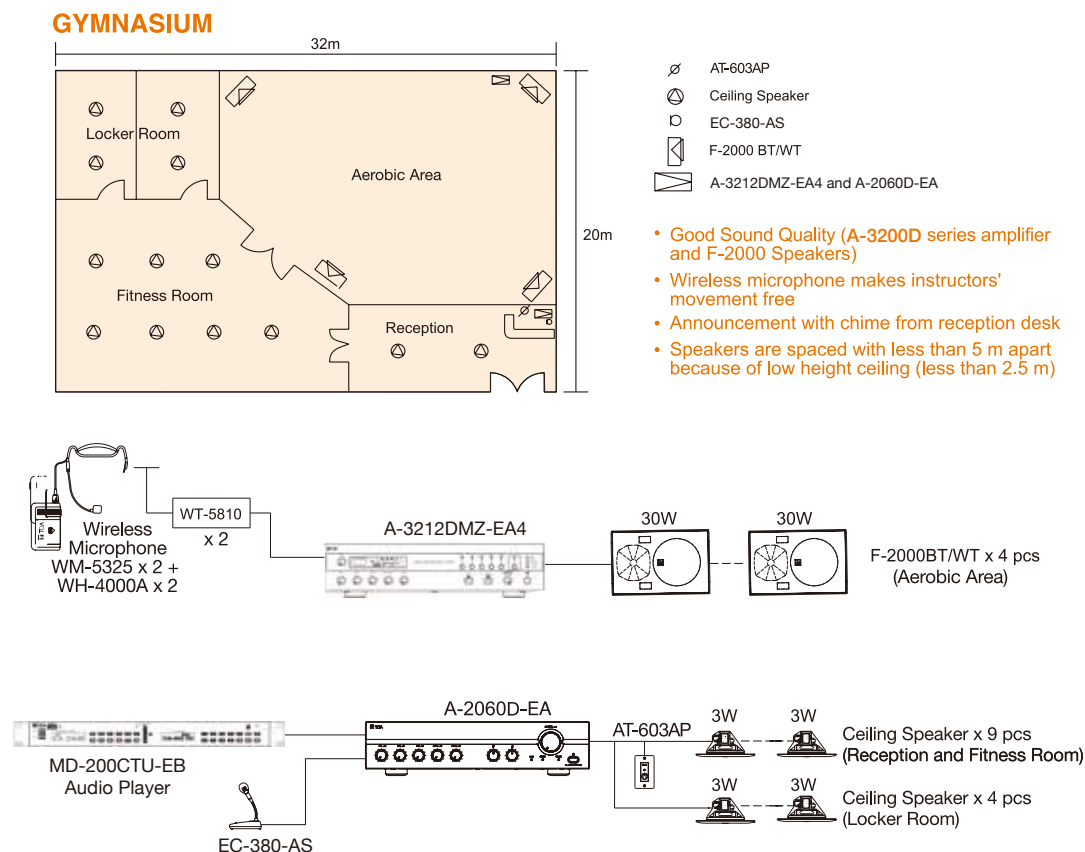


## System Application 7

### TRAINING / SEMINAR ROOM

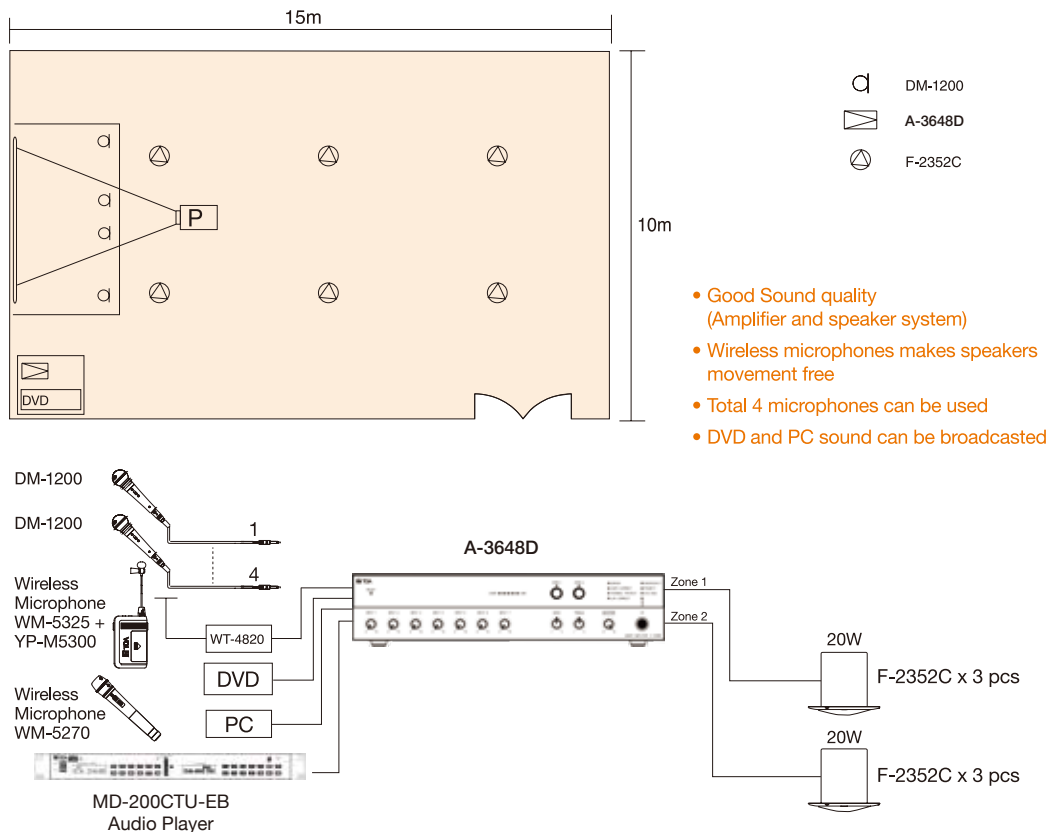


## System Application 8

### CHURCH

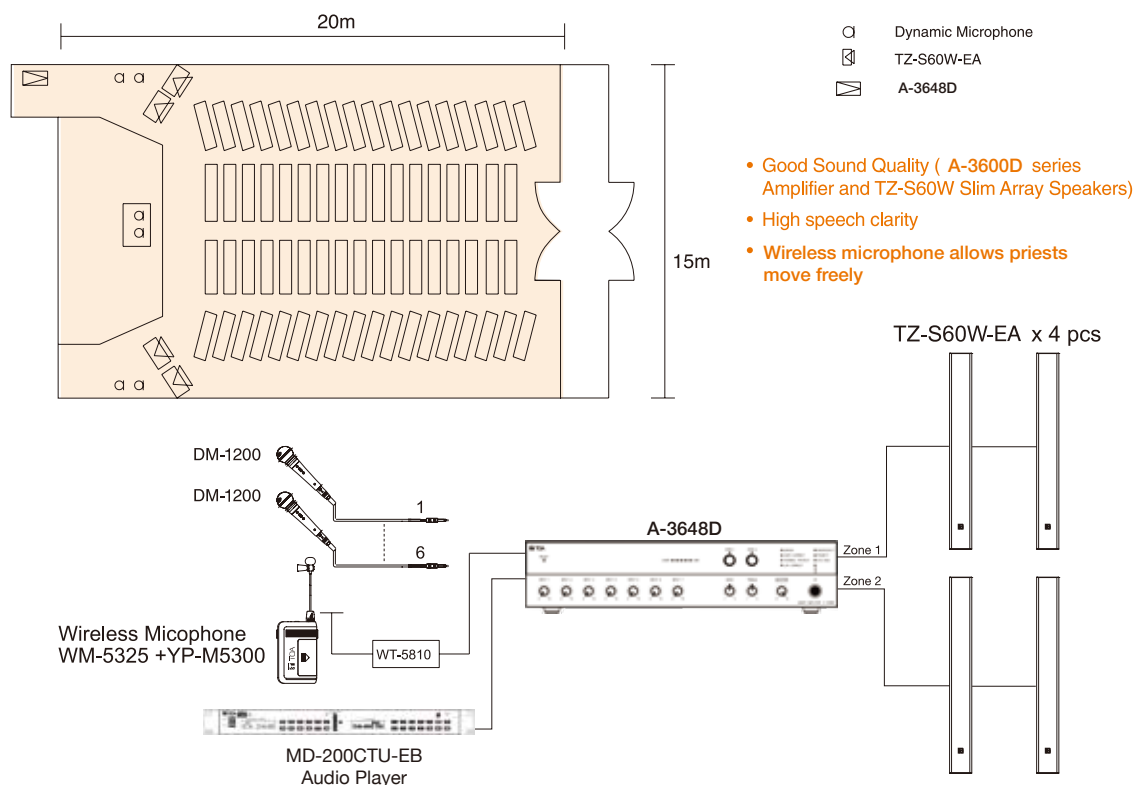


## System Application 9

### WORSHIP PLACE

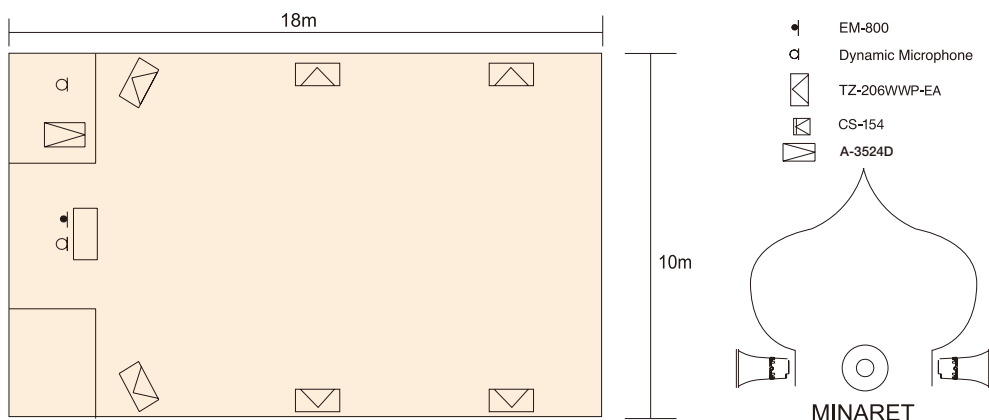


- Economic system that can meet the budget
- One amplifier with Independent volume controls

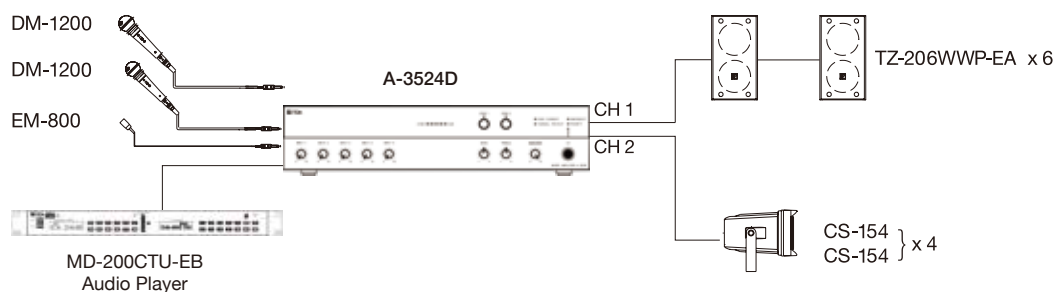


## System Application 10

### CAFE

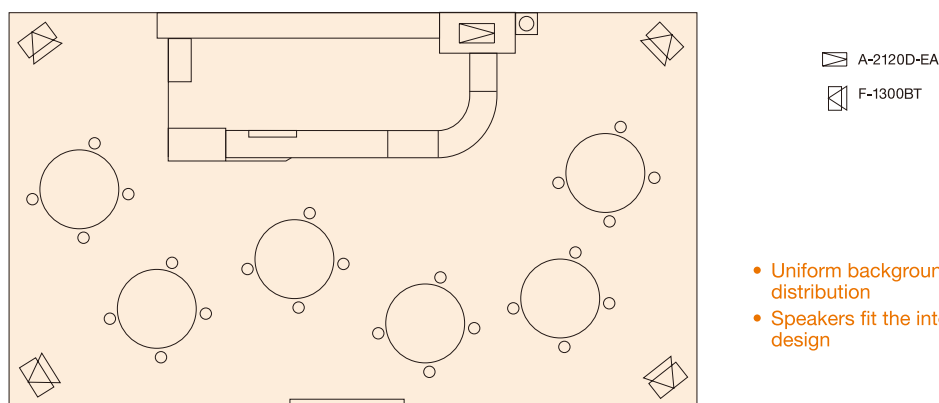


- Uniform background music distribution
- Speakers fit the interior space design

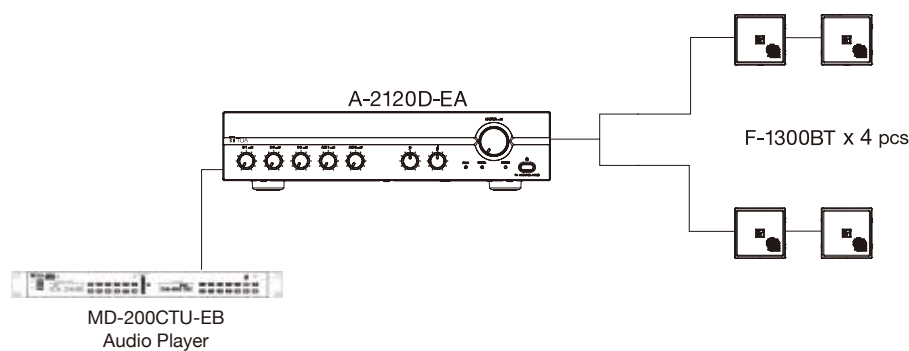


# System Application 11

## RETAIL SHOP

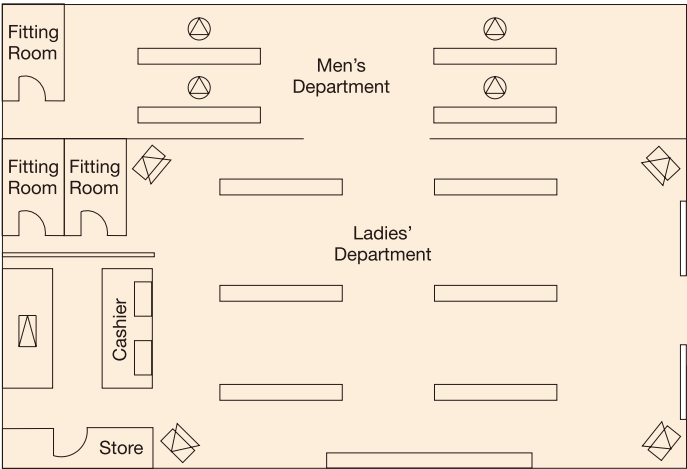

- A-2240D-EA
- F-2852C
- F-1300BT

- Economic system
- Announcement/paging can be made

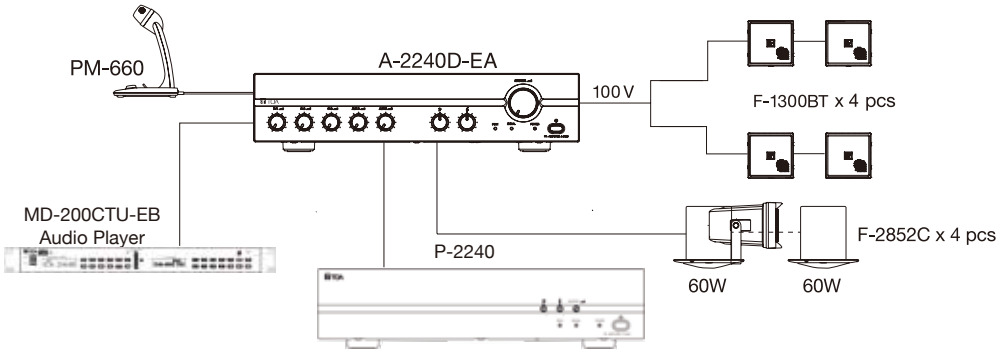


# Microphone

## Wiring of microphones

Output from a microphone is rather weak; therefore, it is important to use shielded cable for microphones to prevent line noise. The low impedance shielded cable intended for microphones are commercially available. The shielded cable is generally used to transmit the audio signals from microphones (-70dB/0.3mV) or source equipment (0dB/1V).


### Balanced and unbalanced type

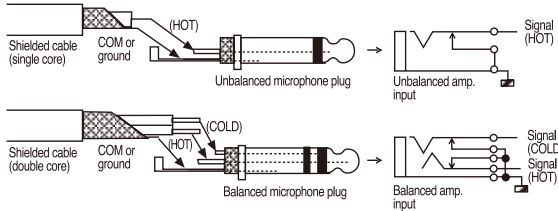

### Balanced and unbalanced output

There are two kinds of output from a microphone: balanced and unbalanced. With balanced output, the audio signal appears between the hot (on-going audio signal) and cold (return audio signal), which are both independent of the ground. With unbalanced output, the audio signal appears between the hot and ground (connected to the cold). The connection between balanced output and balanced input (on the amplifier side) is virtually unaffected by external line noise, and it is used for wiring between long distances. Double-cored shielded cable is used for connecting.

balanced output, and single-cored shielded cable is used for connecting unbalanced output.

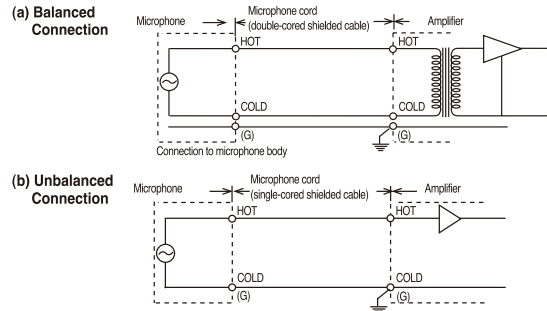

### Distance of extension for microphone cords


The following table shows the maximum extension distance for microphone cords. when distance extends beyond the following figures, excessive noise will make the microphone impractical, and therefore it will be necessary to use a microphone mixer to boost the signal level to minimize the influence of noise.

Microphone output	Amplifier input	Microphone cord extension distance
Unbalanced	Unbalanced	20m
Balanced	Unbalanced	20m
Balanced	Balanced	80m

# Speaker 1

## Rough guide for noise levels and audio levels necessary for loudspeaker (for all types of speakers)

Noise levels are expressed in decibels (dB). Below are some typical examples..

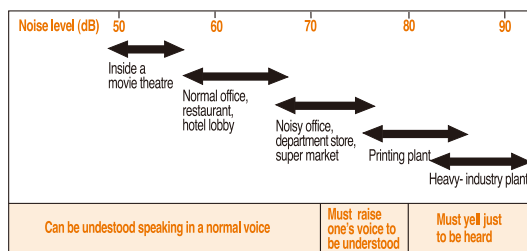

When transmitting voice or music through a speaker, it is necessary to transmit at a level that is higher than the ambient noise level. In the case of voice transmission, it should be transmitted at a level 5 to 10 dB higher than the noise level, background music 3 to 5 dB higher, and foreground music 15 to 20 dB higher.

### Computation of intensity of sound

As an index to express the intensity of sound from a speaker, sound-pressure level (in dB) is generally used. The sound-pressure level rises as the electric input to the speaker increases, and falls as distance from the speaker increases. This relationship is shown by the following formula:

$$SPL (dB) = \boxed{SPL (1W/1m)} - \boxed{\text{Attenuation of SPL due to distance}} + \boxed{\text{Amount of increase of SPL due to electric input}}$$

The SPL (1W/1 m) indicates the sound pressure level at a point 1 meter away from a speaker when an electric input of 1 W is applied to that speaker. This is used to express comparative speaker efficiency, such as in a catalog.

### Attenuation of SPL due to distance

(amount of attenuation =  $20 \log D$  D: distance in meters from speaker)

Distance (m)	2	5	10	15	20	30	40	60	80	100
Amount of increase (dB)	6.0	14.0	20.0	23.5	26.0	29.5	32.0	35.6	38.1	40.0

### Increase of SPL due to electric input

(amount of increase =  $10 \log W$  W: electric input)

Electric Input (W)	1	1.5	3	5	6	10	15	20	30	50
Amount of increase (dB)	0	2.6	4.8	7.0	7.8	10	11.8	13	14.8	17

### Example of calculation:

The SPL(1w/1m) of the model SC-615M is shown as 112 dB. The sound-pressure level of this model at distance of 10 meters with an input of 10 W can be calculated as follows according to the above table:

$$SPL = 112 \text{ dB} - 20 \text{ dB (10m)} + 10 \text{ dB (10W)} = 102 \text{ dB}$$


### Arrangement of speakers in a general office (Ceiling speakers)

Ceiling-mounted speakers are generally used, and their coverage angle is between 90 and 120 degrees. The smaller the distance between speakers, the better the sound quality and the more even the sound volume. The following table shows the area that can be covered by one speaker.



## Speaker 2

### Arrangement of speakers

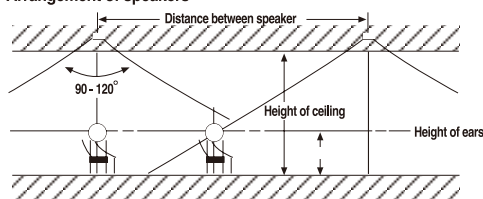


### Area of coverage of one speaker

Purpose	Height of ceiling	Distance between speakers	Area of coverage of one speaker
Background music	Less than 2.5m	5m	About 25m <sup>2</sup>
	2.5 - 4.5m	6m	About 36m <sup>2</sup>
	4.5 - 15m	9m	About 81m <sup>2</sup>
Announcement		9 to 12m	81 to 144 m <sup>2</sup>

For general office use not to include background music, speakers should be arranged about 9 to 12 meters apart. Shown below is an example of speaker arrangement in a 30 m x 20 m office with ceiling height of 3 m, which indicates that this office requires about 6 speakers.

### Example of arrangement

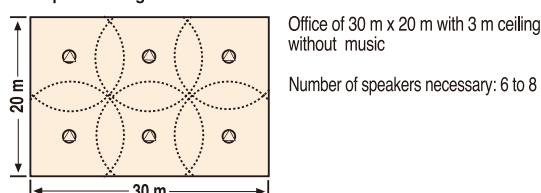


### Arrangement of speakers in a factory (Horn speakers)

Factories with high noise levels generally use horn speakers, which can produce high levels of sound. If you know where people are working in the factory, speakers are best arranged to cover such locations. If that is unknown, speakers should be arranged in accordance with the floor space.

Here is an example of a 40 m x 90 m room in factory with a noise level of 85 dB. In this factory, SC-615M speakers are installed; therefore, the sound pressure that can be obtained at a point 20 meters away with electric input of 15 W will be:  
[112 dB (1W/1m) - 26.0 dB (20 m) + 11.8 dB (15 W)]=97.8 dB

This is a sufficient sound pressure level, 10 dB higher than the noise level. The speakers are installed 20 to 30 meters apart, and 6 speakers can generally cover the area. The sound pressure level near speakers is rather high, so it is necessary to install the speakers at a height of more than 4 meters.

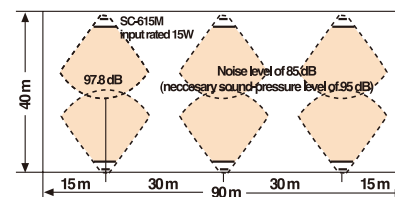

### Speaker wiring

For speaker connections, use 600V vinyl (PVC) insulated wire of 1.2mm to 1.6mm in diameter (AWG17 to AWG 14)


## Speaker 3

### High-impedance connection and low-impedance connection

The PA amplifiers generally come with low-impedance speaker outputs (indicated as 4 Ω, 8 Ω, 16 Ω, etc) and high-impedance outputs (indicated as 70V, 100V, etc). Low-impedance output is used when a small number of speakers (1 to 4) is used and there is a short distance (10-some meters) between amplifiers and speakers. High-impedance output, is used with a large number of speakers and a longer distance of wiring. Speakers with transformers are used for high-impedance output. For a PA system, high impedance connection should be used if possible, in consideration of wrong speaker connections and transmission efficiency.

### Example of low-impedance connection:


It is necessary to design the total speaker input impedance to be larger than the amplifier output impedance. When the total speaker impedance is lower than the amplifier output impedance, unstable operation or amplifier malfunction may result. The wiring distance between amplifier and speaker should be less than 10-some meters. If the wiring distance is greater than this, the output power from the amplifier will be consumed as heat in the cables, and not be able to supply the speaker with sufficient power.

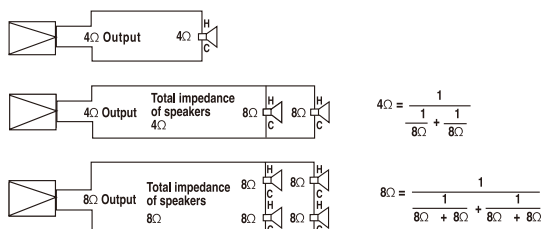

### Example of high-impedance connection:

In a PA system to cover a large area, the wiring distance will be greater, so high impedance connection is used predominantly. In high-impedance connection, all speakers (each with a transformer) will be connected in parallel. Avoid using these speakers together with those without transformers.

In high-impedance connection, as long as you have parallel connection. It will be sufficient to design the total speaker input to be lower than the amplifier output, and this will help eliminate complex impedance calculation.



### Speaker input impedance (10W/100V line)

$$Z = \frac{100 (V)^2}{10 (W)} = 1k\Omega$$

### Amplifier output impedance


$$Z = \frac{100 (V)^2}{60 (W)} = 167 (\Omega)$$

### Total impedance of speakers

$$Z = \frac{1}{\frac{1}{1k(\Omega)} + \frac{1}{1k(\Omega)} + \frac{1}{1k(\Omega)}} = 167 (\Omega)$$

Amplifier output 60W = total speaker input (60W)

Even when connecting speakers with different inputs, there will be no problem as long as the total wattage of the speakers does not exceed the amplifier output.



### Amplifier output impedance

$$Z = \frac{100 (V)^2}{120 (W)} = 83 (\Omega)$$

### Total impedance of speakers

$$Z = \frac{1}{\frac{1}{1.7k(\Omega)} + \frac{1}{1.7k(\Omega)} + \frac{1}{1.7k(\Omega)} + \frac{1}{330(\Omega)} + \frac{1}{330(\Omega)}} = 128 (\Omega)$$

Amplifier output 120W > total speaker input (78W)

















# Certifications & Standards

## IP Grade Panel

This standard provides a system for classifying the degrees of protection provided by the enclosures of electrical equipment under the International Electrotechnical Commission (IEC) publication 529.

The type of protection covered by this system of classification is as follows.

- a) Protection of persons against contact with or approach to live parts and against contact with moving parts inside the enclosure and protection of the equipment against ingress of solid foreign bodies.
- b) Protection of the equipment inside the enclosure against harmful ingress of water.

1st Numeral: Protection against solid foreign objects			2nd Numeral: Protection against ingress of water		
0		Non-protected	0		Non-protected
1		Protected against solid foreign objects of 50mm ø and greater.	1		Protected against vertically falling water drops.
2		Protected against solid foreign objects of 12.5mm ø and greater.	2		Protected against vertically falling water drops when enclosure tilted up to 15°.
3		Protected against solid foreign objects of 2.5mm ø and greater.	3		Protected against spraying water.
4		Protected against solid foreign objects of 1.0mm ø and greater.	4		Protected against splashing water.
5		Dust-protected	5		Protected against water jets.
6		Dust-tight	6		Protected against powerful water jets.
X		Not tested	7		Protected against the effects of temporary immersion in water.
			8		Protected against the effects of continuous immersion in water.
			X		Not tested

## ISO & European Standards



Certificate No. 21896

\* TOA has been granted the "ISO 9001 (BS 575)" registration in the 9000 Series of Quality Assurance Standards by the International Organization for Standardization (ISO).



EN 54 is a standard of the European Union (EU) for fire alarm systems, ensuring high product quality and reliability, and enabling better integration of Voice Alarm (VA) and Public Address (PA). EN 54 plays a significant role in the market for voice evacuation equipment, as the member states of the European Union replace their local standards with the EN 54 standard. All emergency voice evacuation systems marketed in the members states of the European Union are required to be certified to this standard.

**A**

A-2030 .....	52, 130
A-2030D-EA .....	52, 130
A-2060 .....	52, 130
A-2060D-EA .....	52, 130
A-2120 .....	52, 130
A-2120D-EA .....	52, 130
A-2240 .....	52, 130
A-2240D-EA .....	52, 130
A-3212DMZ-EA4 .....	53, 130
A-3224DMZ-EA4 .....	53, 130
A-3248DMZ-EA4 .....	53, 130
A-3512D .....	54, 130
A-3524D .....	54, 130
A-3548D .....	54, 130
A-3606D .....	55, 130
A-3612D .....	55, 130
A-3624D .....	55, 130
A-3648D .....	55, 130
ACC-LP2-CLIP .....	116
ACC-S5-BATC .....	116
ACC-S5-BATD .....	116
ACC-S5-CLIP .....	116
ACC-S5-POUCH .....	116
ACC-S5RX-MB1 .....	116
ACC-S5RX-MB2 .....	116
ACC-S5RX-MB3 .....	116
ACC-X2-CLIP .....	116
AD-031B .....	33
AD-0910 .....	103
AD-1210P .....	47
AD-246 .....	35
AD-5000-2 .....	109
AD-5000-6 .....	109
AM-1MBQAM .....	117
AM-1MWQAM .....	117
AM-CF1B .....	98
AM-CF1W .....	98
AN-001T .....	58
AN-9001 .....	61
ANT-S5X-D .....	116
ANT-S5X-G .....	116
AT-063AP .....	96
AT-303AP .....	96
AT-4012B-EB .....	97
AT-4030B-EB .....	97
AT-4060B-EB .....	97
AT-4120B-EB .....	97
AT-4200B-EB .....	97
AT-603AP .....	96
AX-0240 .....	5

**B**

BC-5000-12 .....	109
BC-5000-2 .....	109
BC-5000-6 .....	109
BC-920 .....	103
BP-900A .....	103
BS-1006 .....	83
BS-1030B .....	84, 129
BS-1030W .....	84, 129
BS-1034 .....	84
BS-1034S .....	84
BS-1110W .....	84, 129

BS-1120W .....	84
BS-634 .....	84
BS-634T .....	84
BS-678 .....	83
BS-678B .....	83
BS-678BT .....	83
BS-678T .....	83
BS-680F .....	83
BS-680FC .....	83
BS-P1030BIP1 .....	7
BS-P1030WIP1 .....	7
BS-P678E .....	7
BS-P678IP1 .....	7
BS-PE678IP1 .....	6

**C**

C-001T .....	59
CA-115 .....	56
CA-130 .....	56
CA-160 .....	56
CK-025 .....	32
CM-760 .....	89
CM-960 .....	89
CP-73 .....	89
CP-77 .....	89
CP-93 .....	89
CP-97 .....	89
CS-154 .....	95
CS-304 .....	95
CS-64 .....	94
CS-760B-AS .....	95
CS-760W-AS .....	95

**D**

D-001R .....	59
D-001T .....	59
D-2000AD1 .....	62
D-2000CB .....	62
D-2000DA1 .....	62
D-2008SP .....	61
D-2012AS .....	62
D-2012C .....	62
D-901 .....	63
D-911 .....	63
D-921E .....	20, 65
D-921F .....	20, 65
D-922E .....	20, 65
D-922F .....	20, 65
D-923AE .....	64
D-936R .....	20, 64
D-971E .....	64
D-971M .....	64
D-971R .....	64
D-972AE .....	64
D-981 .....	64
D-983 .....	64
D-984VC .....	63
DA-250D .....	51
DA-250DH .....	51
DA-250F .....	50
DA-250FH .....	50
DA-500FH .....	50
DA-550F .....	50

DA-X0130F-EA .....	11
DA-X1000S-EA .....	11
DH-110 .....	94
DH-120 .....	94
DM-1100 .....	119
DM-1200 .....	119
DM-1300 .....	119
DM-1500 .....	119
DM-524B .....	120
DM-524S .....	120
DP-K1 .....	67
DP-L2 .....	68
DP-SP3 .....	67

**E**

E-7000TB .....	47
EC-380-AS .....	118
EM-380-AS .....	120
EM-410 .....	120
EM-600 .....	120
EM-700 .....	120
EM-800 .....	120
ER-1203 .....	122
ER-1206 .....	122
ER-1206S .....	122
ER-1206W .....	122
ER-1215 .....	122
ER-1215S .....	122
ER-2215 .....	123
ER-2215W .....	123
ER-2230W .....	123
ER-2930W .....	123
ER-3215 .....	122
ER-604W .....	124
EV-200M .....	28
EV-20R .....	30, 130
EV-700 .....	31

**F**

F-1000B .....	78, 125
F-1000BT .....	78, 125
F-1000BTWP .....	78, 125
F-1000W .....	78, 125
F-1000WT .....	78, 125
F-1000WTWP .....	78, 125
F-122C .....	80
F-1300B .....	79, 125
F-1300BT .....	79, 125
F-1300BTWP .....	79, 125
F-1300W .....	79, 125
F-1300WT .....	79, 125
F-1300WTWP .....	79, 125
F-1522SC .....	80
F-2000B .....	79, 125
F-2000BT .....	79, 125
F-2000BTWP .....	79, 125
F-2000W .....	79, 125
F-2000WT .....	79, 125
F-2000WTWP .....	79, 125
F-2322C .....	80
F-2352C .....	80
F-2352SC .....	80
F-2852C .....	80

FB-120B .....	74, 126
FB-120W .....	74, 126
FB-150B .....	74, 126
FB-150W .....	74, 126
FB-2862C-EA .....	81

## G

GS-302 .....	96
--------------	----

## H

H-1 .....	77, 129
H-2 .....	77
H-2WP .....	77
H-3 .....	77
H-3WP .....	77
HB-1 .....	78
HS-1200BT .....	75, 129
HS-1200WT .....	75, 129
HS-120B .....	75, 129
HS-120W .....	75, 129
HS-1500BT .....	76, 129
HS-1500WT .....	76, 129
HS-150B .....	76, 129
HS-150W .....	76, 129
HX-5B .....	73, 126
HX-5B-WP .....	73, 126
HX-5W .....	73, 126
HX-5W-WP .....	73, 126
HX-7B .....	74, 126
HX-7B-WP .....	74, 126
HX-7W .....	74, 126
HX-7W-WP .....	74, 126
HY-1200HB .....	129
HY-1200HW .....	129
HY-1200VB .....	129
HY-1200VW .....	129
HY-1500HB .....	129
HY-1500HW .....	129
HY-1500VB .....	129
HY-1500VW .....	129
HY-60DB .....	126
HY-60DB-WP .....	126
HY-60DW .....	126
HY-60DW-WP .....	126
HY-AH1 .....	81
HY-B0801 .....	128
HY-BC1 .....	81
HY-BH10B .....	125
HY-C0801 .....	128, 129
HY-C0801W .....	129
HY-CL10B .....	125
HY-CL20B .....	125
HY-CM10B .....	125
HY-CM10W .....	125
HY-CM20B .....	125
HY-CM20W .....	125
HY-CN1B .....	126
HY-CN1B-WP .....	126
HY-CN1W .....	126
HY-CN1W-WP .....	126
HY-CN7B .....	126
HY-CN7B-WP .....	126

HY-CN7W .....	126
HY-CN7W-WP .....	126
HY-CW1B .....	126
HY-CW1W .....	126
HY-CW1WP .....	126
HY-H1 .....	129
HY-MS7B-WP .....	126
HY-MS7W-WP .....	126
HY-MT7 .....	126
HY-PF1B .....	126
HY-PF1W .....	126
HY-PF1WP .....	126
HY-PF7B .....	126
HY-PF7W .....	126
HY-RR1 .....	81
HY-RR2 .....	81
HY-S60W-EA .....	75, 127
HY-ST04 .....	128
HY-ST1 .....	126
HY-ST7 .....	126
HY-TB1 .....	81
HY-TM7B-WP .....	126
HY-TM7W-WP .....	126
HY-TR1 .....	81
HY-UH04 .....	128
HY-UH08 .....	128
HY-UV04 .....	128
HY-UV08 .....	128
HY-VM7B .....	126
HY-VM7W .....	126
HY-W0801 .....	128, 129
HY-W0801W .....	129
HY-WM04 .....	128
HY-WM08 .....	128
HY-WM1B .....	126
HY-WM1W .....	126
HY-WM1WP .....	126
HY-WM2B .....	126
HY-WM2W .....	126
HY-WM2WP .....	126
HY-WM7B .....	126
HY-WM7W .....	126

## I

IP-1000AF .....	4
IP-1000CI .....	4
IP-1000S .....	4
IP-1000S1-EA .....	4
IP-100RM .....	6
IP-100XI .....	5
IP-101RM .....	6
IP-3000SM .....	8
IP-3001AF .....	9
IP-300RM .....	9
IP-300XI .....	8
IP-3010AF .....	9
IP-A1SC15 .....	36
IR-200BC .....	112
IR-200BT-2Y .....	112
IR-200M .....	110
IR-201M .....	112
IR-300M .....	110
IR-500R .....	112
IR-510R .....	112
IR-520R .....	112

IR-700D .....	111, 130
IR-701T .....	111
IR-701TA .....	111
IR-702T .....	111, 130
IT-450 .....	24, 27

## J

JB-031B .....	34
---------------	----

## L

LD-S5-ANT .....	116
LD-X-JAC .....	116
LS-2010-AS .....	32

## M

M-633D .....	65
M-864D .....	66
M-9000M2 .....	58
MA-725F-EB .....	56
MB-15B .....	130
MB-15B-BK .....	130
MB-15B-J .....	130
MB-25B .....	130
MB-36 .....	130
MB-TS900 .....	103
MB-TS920 .....	103
MB-WT3 .....	130
MB-WT4 .....	130
MD-200CTU-EB .....	30
MIC-LP2 .....	116
MIC-X2 .....	116
MP-011 .....	33
MP-032B .....	33
MP-1216 .....	33
MP-210-AS .....	33
MT-200 .....	75
MT-251H .....	51
MT-S0301 .....	71
MT-S0601 .....	72
MX-113-EB .....	58

## N

N-8000AF .....	38, 130
N-8000AL .....	38, 130
N-8000CO .....	39, 130
N-8000DI .....	38
N-8000EX .....	37
N-8000MI .....	37
N-8000MS .....	42
N-8000RS .....	39
N-8000SG .....	44
N-8010EX .....	37
N-8010MS .....	42
N-8010RS .....	39
N-8011MS .....	42
N-8020MS .....	43
N-8031MS .....	43

N-8031SB .....	44
N-8033MS .....	43
N-8050DS .....	44
N-8050SB .....	44
N-8400RS .....	39
N-8410MS .....	46
N-8600MS .....	40
N-8610RM .....	21, 40
N-8640DS .....	41
N-8640SB .....	41
N-8650DS .....	41
NDC-2435 .....	33
NDC-2460 .....	33
NX-100 .....	36, 130
NX-100S .....	36, 130
NX-300 .....	35, 130

## P

P-2240 .....	53, 130
P-3248D-EA4 .....	53, 130
PA-3640VB .....	32, 130
PC-1860BS .....	89
PC-1860F .....	90
PC-1860S .....	87
PC-1868HK2 .....	87
PC-1868SW2 .....	87
PC-2268 .....	88
PC-2268WP .....	88
PC-2360 .....	87
PC-2668 .....	88
PC-2852 .....	88
PC-2869 .....	88
PC-391 .....	96
PC-391T .....	96
PC-3CL .....	90
PC-3WR .....	90
PC-648R .....	88
PC-658R .....	88
PC-6WM-EA .....	89
PC-PE1868IP1 .....	6
PE-304 .....	86
PE-64 .....	86
PF-013B .....	34
PF-023B .....	34
PF-1100 .....	34
PJ-100W .....	86
PJ-200W .....	86
PJ-304 .....	86
PJ-64 .....	86
PM-120 .....	119
PM-222 .....	119
PM-660 .....	118
PM-660D .....	118
PM-660U .....	118
PP-025B .....	32
PS-011B .....	34
PS-S115-UK .....	116
PW-1230DB .....	85
PW-1230DW .....	85
PW-1230SB .....	85
PW-1230SW .....	85
PW-1430DB .....	85
PW-1430DW .....	85
PW-1430SB .....	85
PW-1430SW .....	85

## Q

Q-BC1868 .....	87
----------------	----

## R

RC-001T .....	60
RM-110 .....	6
RM-110VX-EA .....	10
RM-200M .....	26, 28
RM-200RJ .....	22
RM-200SA .....	21
RM-200SF .....	14, 21
RM-210 .....	16, 22, 26, 28
RM-210F .....	14
RM-300MF .....	25
RM-300X .....	14
RM-320F .....	26
RS-140 .....	45
RS-141 .....	45
RS-142 .....	45
RS-143 .....	45
RS-144 .....	45
RS-150 .....	45
RS-160 .....	45
RS-170 .....	45
RS-180 .....	45
RS-191 .....	43
RS-442 .....	46
RS-450 .....	46
RS-460 .....	46
RS-470 .....	46
RS-480 .....	46
RS-481 .....	46
RU-2001 .....	118
RU-2002 .....	118

## S

S4.04-HD-EA .....	113
S4.04-L-EA .....	113
S4.10-HD2-EA .....	114
S4.10-HD-EA .....	113
S4.10-HDL-EA .....	114
S4.10-L2-EA .....	114
S4.10-L-EA .....	113
S5.5-HC-C5 .....	115
S5.5-HD-C5 .....	115
S5.5-L-C9 .....	115
S5-ADU-GW .....	116
SA-112 .....	110
SA-130 .....	5
SC-240 .....	95
SC-610 .....	92
SC-610M .....	92
SC-615 .....	92
SC-615M .....	92
SC-630 .....	92
SC-630M .....	92
SC-651 .....	93
SC-PE630IP1 .....	7
SP-1100 .....	123
SP-131 .....	97, 125
SP-201 .....	97
SP-301 .....	97

SP-410 .....	129
SP-420 .....	129
SR-A12L .....	69, 127
SR-A12LWP .....	69, 127
SR-A12S .....	69, 127
SR-A12SWP .....	69, 127
SR-A18B .....	69, 127
SR-C15B .....	70
SR-C15BWP .....	70
SR-C815B .....	128
SR-C815BWP .....	128
SR-C8L .....	70, 128
SR-C8LWP .....	70, 128
SR-C8S .....	70, 128
SR-C8SWP .....	70, 128
SR-CL8 .....	128
SR-EP3 .....	128
SR-EP4 .....	127
SR-EP4WP .....	127
SR-F04 .....	76, 128
SR-F08 .....	76, 128
SR-H2L .....	71, 128
SR-H2S .....	71, 128
SR-H3L .....	71, 128
SR-H3S .....	71, 128
SR-PB5 .....	129
SR-PP4 .....	127
SR-RF12 .....	127
SR-RF12WP .....	127
SR-RF8 .....	128
SR-RF8WP .....	128
SR-S4L .....	72, 127
SR-S4LWP .....	72, 127
SR-S4S .....	72, 127
SR-S4SWP .....	72, 127
SR-SA3 .....	128
SR-SA4 .....	127
SR-SB8 .....	128
SR-T5 .....	73, 129
SR-TB3 .....	128
SR-TB4 .....	127
SR-TB4WP .....	127
SR-TP12 .....	127
SR-TP8 .....	128
SR-WB3 .....	128
SR-WB4 .....	127
SR-WB4WP .....	127
SS-021B .....	31
SS-1010 .....	31
SS-2010-AS .....	31
SS-9001 .....	61
ST-16A .....	82, 125, 129
ST-303A .....	121
ST-304A .....	121
ST-310F .....	121
ST-321B .....	121
ST-34B .....	128, 129
ST-506 .....	121
ST-507 .....	121
ST-65A .....	121
ST-66A .....	121
ST-73A .....	121
ST-800 .....	121
SV-200MA .....	28
SX-2000AO .....	19
SX-2000CI .....	19
SX-2000CO .....	19
SX-2000SM .....	17

SX-200IP .....	20
SX-200RM .....	20
SX-2100AI .....	18

## T

T-001T .....	59
TC-615 .....	93
TC-615M .....	93
TC-631 .....	93
TC-631M .....	93
TC-651M .....	93
TH-650 .....	90
TH-660 .....	90
TM-60T .....	95
TP-M15D .....	94
TP-M15E .....	94
TS-811 .....	101
TS-812 .....	101
TS-820 .....	99
TS-820RC .....	99
TS-821 .....	100
TS-822 .....	100
TS-903 .....	102
TS-904 .....	102
TS-905 .....	103
TS-907 .....	103
TS-910 .....	101
TS-911 .....	101
TS-912 .....	101
TS-918 .....	102, 130
TS-919B1 .....	102
TS-919B4 .....	102
TS-920RC .....	99
TS-921 .....	100
TS-922 .....	100
TS-923 .....	100
TS-924 .....	100
TS-D1000-CU .....	104
TS-D1000-DU .....	104
TS-D1000-EX .....	105
TS-D1000-M1 .....	105
TS-D1000-M2 .....	105
TS-D1000-MU .....	104
TS-D1000-SU .....	105
TT-208-AS .....	30
TU-631 .....	91
TU-631M .....	91
TU-651 .....	91
TU-651M .....	91
TU-660 .....	91
TU-660M .....	91
TZ-206BWP-EA .....	82
TZ-206WWP-EA .....	82
TZ-406BWP-EA .....	82
TZ-406WWP-EA .....	82
TZ-606BWP-EA .....	82
TZ-606WWP-EA .....	82
TZ-P406BIP1 .....	8
TZ-P406WIP1 .....	8
TZ-S60W-EA .....	75, 127

## U

UC-200A .....	91
---------------	----

## V

VM-2120 .....	27, 130
VM-2240 .....	27, 130
VM-300SV .....	24
VM-3240E .....	25
VM-3240VA .....	24
VM-3360E .....	25
VM-3360VA .....	24
VX-015DA .....	13
VX-030DA .....	13
VX-050DA .....	13
VX-1000MC-EA .....	10
VX-1000PF-EA .....	11
VX-100RM-EA .....	10
VX-1010ZE-EA .....	11
VX-1125DA-EA .....	11
VX-1250DA-EA .....	11
VX-1500DA-EA .....	11
VX-3000CT .....	15
VX-3000DS .....	13
VX-3000MG-EA .....	14
VX-3000PM .....	15
VX-3004F .....	12
VX-3008F .....	12
VX-300LO .....	16
VX-3016F .....	12
VX-3150DS .....	13

## W

WA-1830MB-AS .....	57
WB-2000-2 .....	109
WD-5800 .....	108, 130
WH-4000A .....	107
WH-4000H .....	107
WH-4000P .....	107
WH-4000S .....	107
WM-5225 .....	106
WM-5265 .....	106
WM-5270 .....	106
WM-5325 .....	106
WP-700-EB .....	56
WT-4820 .....	108, 130
WT-5100 .....	107
WT-5800 .....	108, 130
WT-5805 .....	108, 130
WT-5810 .....	108
WTU-4800 .....	109, 123

## Y

YA-1000A .....	32
YB-121B .....	130
YC-150 .....	47, 96
YC-150E .....	96
YC-241 .....	47
YC-251 .....	47
YC-280 .....	47
YC-290 .....	47
YC-302 .....	47
YC-822 .....	47
YC-823 .....	47
YC-841 .....	47

YC-850 .....	47
YJ-120B .....	130
YM-003LB .....	130
YP-E401 .....	107
YP-E5000 .....	107
YP-M101 .....	112
YP-M201 .....	112
YP-M301 .....	112
YP-M5000E .....	107
YP-M5000H .....	107
YP-M5300 .....	107
YP-M5310 .....	107
YP-MS4E .....	114
YP-MS4H .....	114
YS-11A .....	97
YS-13A .....	47
YS-151S .....	97
YS-60B .....	97, 125
YW-1022 .....	103, 111
YW-1024 .....	103, 111
YW-3500 .....	110
YW-3510 .....	110
YW-4500 .....	109
YW-7570 .....	116

## Z

ZM-104A .....	97
ZM-9001 .....	60
ZM-9002 .....	60
ZM-9011 .....	60
ZM-9012 .....	60
ZM-9013 .....	60
ZM-9014 .....	60
ZP-001T .....	60





TOA (Hong Kong) Limited

Website: <http://www.toa.com.hk>

E-mail: [sales@toa.com.hk](mailto:sales@toa.com.hk)

Tel: (852) 2782-0311

Specifications are subject to change without notice.  
Printed in Hong Kong