


IP-100XI

AMPLIFIER NETWORK MODULE

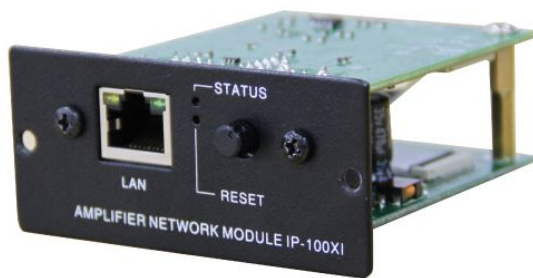

IP-100XI is a power amplifier network module, which can be installed in the specific amplifier product to increase the network functions. It can receive broadcast from other terminals and servers and it supports system setting via browser.

Key features


#Allow the amplifier to extent the network function.

Specifications

Power Supply	DC 24V
Current Consumption	Below 85mA
Amplifier Fault Detection Input	low level, activated, open-circuit voltage: 3.3 V
Amplifier Protection Detection Input	low level, activated, open-circuit voltage: 3.3 V
Amplifier Audio Signal Output	Range: 1V rms, unbalanced 600Ω
Amplifier Muting Control Output	High impedance, max. sink current: 10 mA, withstand voltage : 24V DC
Frequency Response	LINE OUT (MP3/ sampling frequency: 44k): 40Hz -15kHz
Network I/F	10 BASE-T/ 100 BASE-TX, auto negotiation
Network Protocol	UDP, ARP, CMP, IGMP
Operating Temperature	0°C to +40°C
Operating Humidity	Less than 90% RH (no condensation)
Dimensions	78 (W) x 35 (H) x 81(D) mm
Weight	0.1 kg

Dimensions

Front View

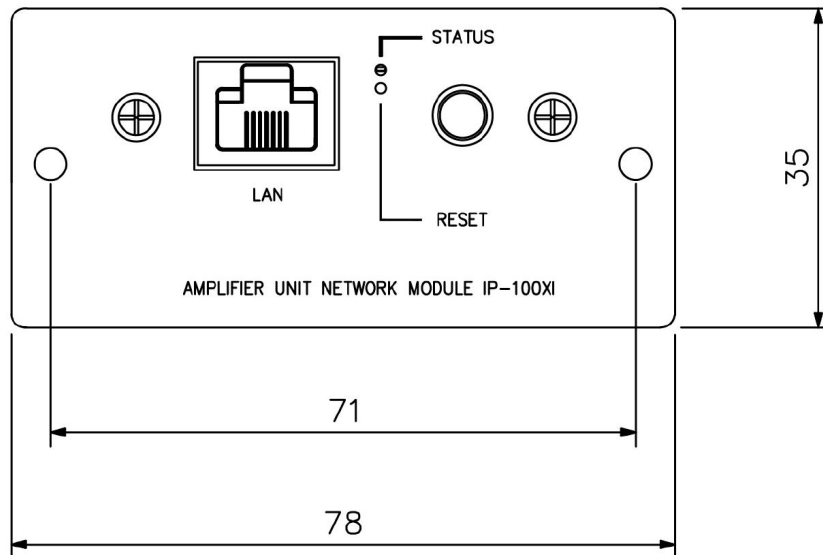

UNIT:mm SCALE:1/4