

PC-1868HK2

CEILING MOUNT SPEAKER



PC-1868 series equips with resign speaker panel and metal grill in white colour. Spring catch design together with anchor bolt design allows easy installation for different situation.


Key features

- 12cm (5") cone type speaker
- Flat front panel
- Quick and easy installation thanks to its spring catch method
- Equipped with a metal grill and ABS resin baffle

Specifications

Rated Input	6W (for 100 V line), 3W (for 70 V line)
Rated Impedance	100 V line: 1.7 k Ω (6W), 3.3 k Ω (3W), 10 k Ω (1W), Internal wiring must be changed 70 V line: 1.7k Ω (3W), 3.3k Ω (1.5W), 10 k Ω (0.5 W), Internal wiring must be changed
Sensitivity (1W, 1m)	90 dB (330Hz – 3.3kHz, pink noise)
Frequency Response	100Hz – 16kHz
Speaker Component	12cm (5") cone type
Speaker Mounting Method	Spring catch
Finish	Baffle: ABS resin, off-white (RAL9010 or equivalent color) Grille: Steel net, off-white (RAL9010 or equivalent color), paint
Dimensions	$\phi 180 \times 11$ (exposed section) + 110 (D) mm
Wall Mounting Dimensions	$\phi 150$ (mounting hole) $\times$ 50mm (maximum ceiling thickness)
Weight	740g (bracket included)
Included Accessories	00 V Vinyl-insulated cable (IV wire or HIV wire) Solid copper wire: $\phi 0.8 - \phi 1.2$ mm 7-core twisted copper wire: 0.75 - 1.25mm ²
Optional Accessories	Metal Back Can Q-BC1868

Dimensions

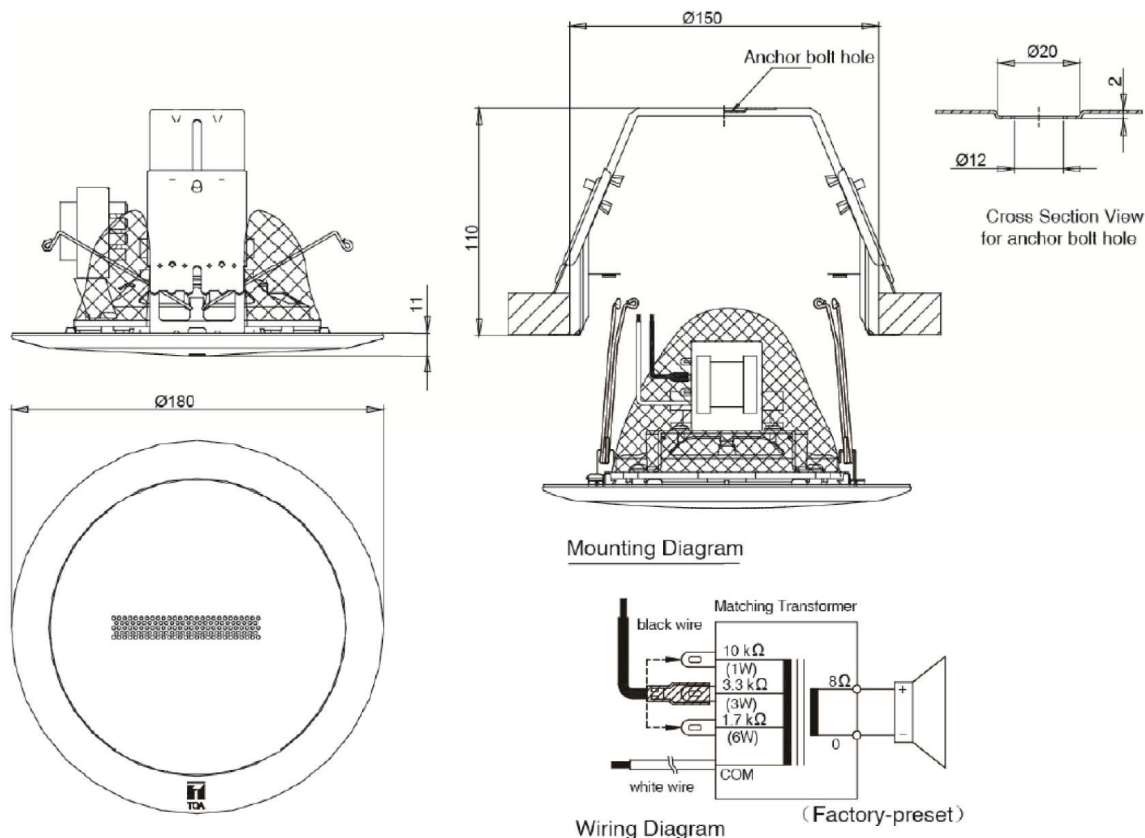

UNIT : mm SCALE : 1 / 3

[Note] Use transformer terminals when changing input impedance.