

## TH-650 EU

### REFLEX HORN



The TH-650 is a speaker horn to be used in combination with an optional driver unit. Its powder-coated finish, and stainless steel screws ensure the unit's weatherproof capability.


### Key features

- Weatherproof construction for outdoor use
- Durable construction provides reliable operation over a long time
- Round shape ensures high speech clarity and sound quality and symmetrical sound dispersion - also suitable for music reproduction
- Shock-resistant
- Aluminium horn with durable powder coating
- For use with drivers TU-631, TU-651 or TU-631M / TU-651M (optional)


## Specifications

|                       |                                                                                                                                                                                                                                   |
|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Compatible Driver     | TU-631, TU-631M, TU-651, TU-651M                                                                                                                                                                                                  |
| Driver Coupling       | 1 - 3/8 18 threads (inch screw)                                                                                                                                                                                                   |
| Sound Pressure Level  | 110 dB (1 W, 1 m) (When operated with a driver.)                                                                                                                                                                                  |
| Frequency Response    | 200 Hz - 6 kHz (When operated with a driver.)                                                                                                                                                                                     |
| Dust/Water Protection | IP65 (When operated with a driver.)                                                                                                                                                                                               |
| Operating Temperature | -20 # to +55 # (must be free from dew condensation)                                                                                                                                                                               |
| Finish                | Horn flare and flange: Aluminum, off-white, powder coating<br>Reflector horn: ABS resin, off-white<br>Bracket holder: Aluminum, gray, powder coating<br>Bracket: Steel, gray, powder coating<br>Screws and bolts: Stainless steel |
| Dimensions            | #500 x 394 (D) mm                                                                                                                                                                                                                 |
| Weight                | 2.9 kg                                                                                                                                                                                                                            |

## Dimensions

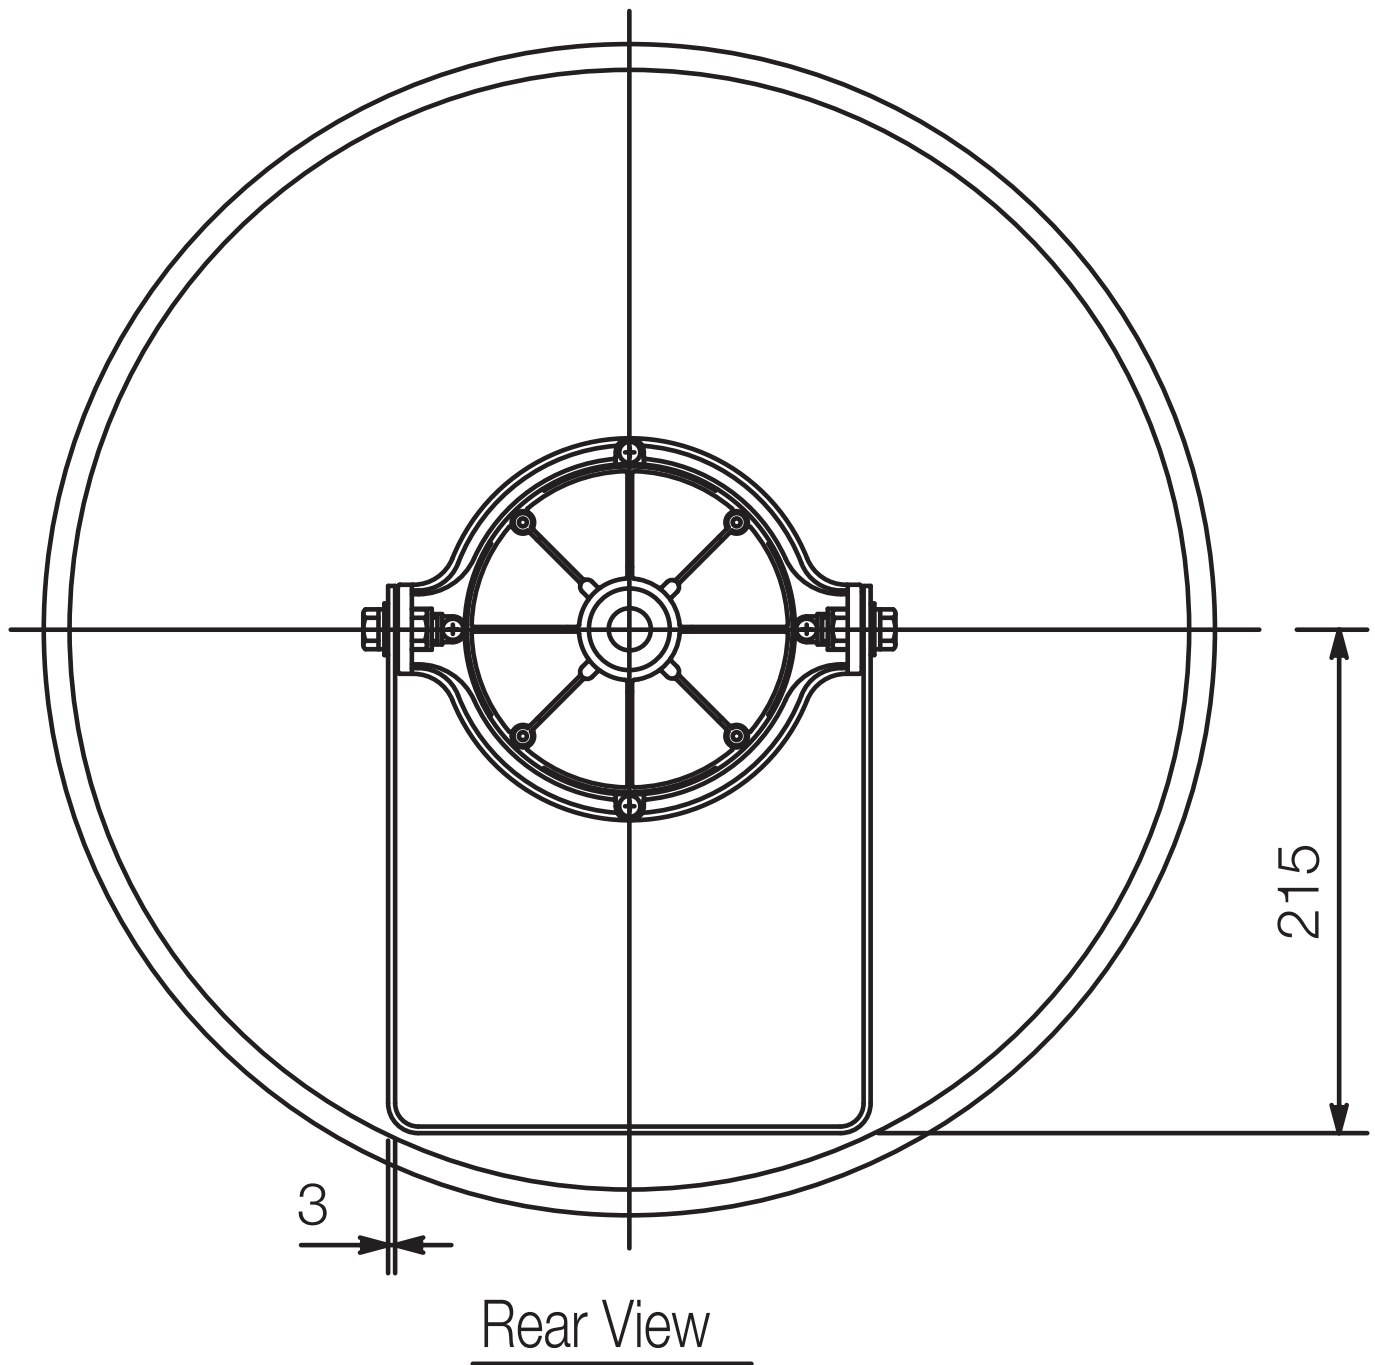

## Dimensions

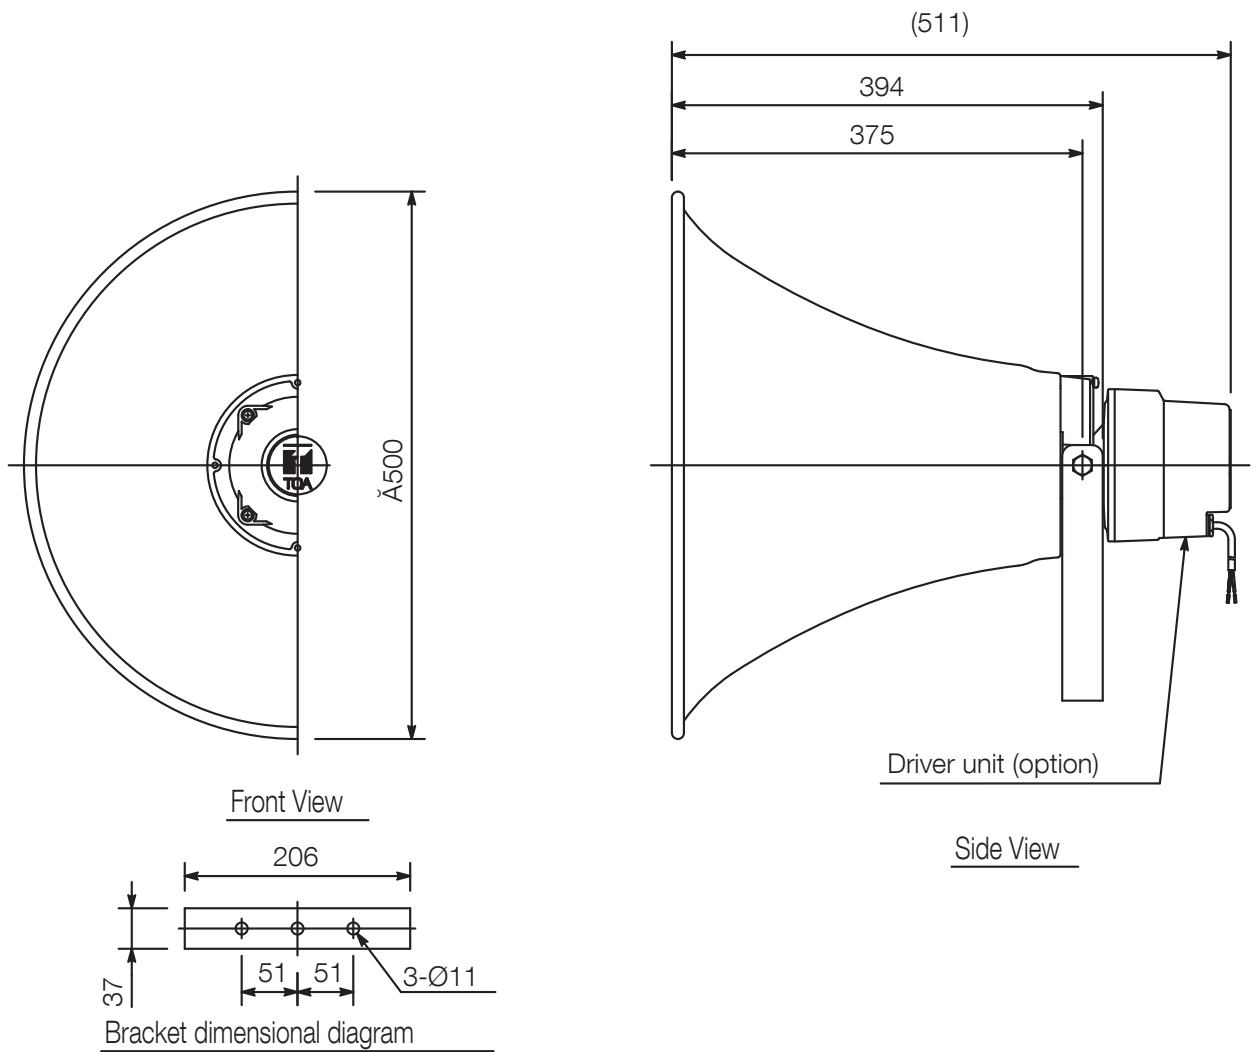

UNIT:mm

SCALE:1/8

Note: Numerical values in parentheses are for reference only.

## A&E specifications

Round reflex Horn with high directivity for large distances and noisy environment, with mounting bracket, weatherproof to IP65 (with driver)